




# PRODUCT SPECIFICATIONS

# X2-SERIES LED LIGHT BAR



No screws on the surface protects against corrosion and improves aerodynamic design to lower the wind resistance and noise.

New hooded reflector design

## 12" TO 50"

OSRAM 5W LED with high lux and stable luminous efficiency.

Bezel-less UV protected lens prevents water and bugs from sticking and makes it easier to clean.

- RAW LUMENS  
**UP TO 42,000 LUMENS**
- OSRAM®  
**5 WATT**
- INPUT  
**9~32V**
- WATERPROOF  
**IP-67**
- COLOR TEMP  
**6000K**
- CHROME  
**PLATED HARDWARE**
- DESIGNED  
  
**IN USA**



BRIDGE 800 YDS

## SPECIFICATIONS

Part #	Length	Housing	Raw Lumens*	LED (Qty) & Max Watts	AMP Draw	A	B	C	D	E	F
X2-12	12"	BLACK	10,080LM	24 X 5W OSRAM®	4.3A @ 12V DC	2.8"	12"	2.7"	14.5"	2.63"	15.5"
X2-12-WHT	12"	WHITE	8,820LM	24 X 5W OSRAM®	4.3A @ 12V DC	2.8"	12"	2.7"	14.5"	2.63"	15.5"
X2-20	20"	BLACK	16,800LM	40 X 5W OSRAM®	8.6A @ 12V DC	2.8"	20"	2.7"	22.5"	2.63"	23.5"
X2-20-WHT	20"	WHITE	16,800LM	40 X 5W OSRAM®	8.6A @ 12V DC	2.8"	20"	2.7"	22.5"	2.63"	23.5"
X2-30	30"	BLACK	25,200LM	60 X 5W OSRAM®	12.9A @ 12V DC	2.8"	30"	2.7"	32.5"	2.63"	33.5"
X2-40	40"	BLACK	33,600LM	80 X 5W OSRAM®	17.2A @ 12V DC	2.8"	40"	2.7"	42.5"	2.63"	43.5"
X2-50	50"	BLACK	42,000LM	100 X 5W OSRAM®	21.5A @ 12V DC	2.8"	50"	2.7"	52.5"	2.63"	53.5"

\* Based on LED manufacturer specifications





# PRODUCT SPECIFICATIONS

# X2-SERIES LED LIGHT BAR

## FEATURES

- Optimal Beam Pattern to Reduce Bow Reflection
- 5W OSRAM® OSLOX CSHP LX ECE LED'S
- Extruded 6063 Aluminum Body
- Available in White or Black Housing
- Integrated Temperature Control System (TCS)
- 9~32VDC Input
- IP67 Rated
- 6000K (Cool White)
- High Lux - High Output
- Durable Scratch Resistant High Impact Polycarbonate Lens
- New Design to Improve Aerodynamics (Noise Reducers are Not Required)
- Chrome Coated Stainless Hardware to Eliminate Dissimilar Metal
- 50,000 Hours or 5 Years of Continuous Use
- Over / Under and Reverse Polarity Protection
- VHF and AIS Safe
- Protected Against Electromagnetic (EMC) & Radio Frequency Interference (RFI)
- Operating Temp: -40°F- +145°F



## FLASH NEW HOODED REFLECTOR SYSTEM

We have updated the base, reflector and lens to design a new optic system according to the marine driving environments required. Our new optics allow us to control the functionality of the light zone and reduce wasted light, which converts to the most efficient light on the market and the only light beam pattern designed for a center console boat

## OPTIONAL MOUNTS (SOLD SEPARATELY)




## DIMENSIONS

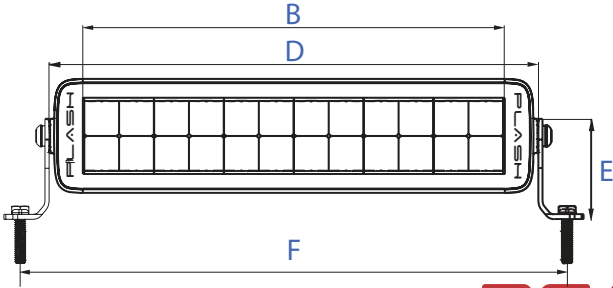

## INCLUDES

- (2) Chrome Coated Mounting Brackets
- Chrome Coated Stainless Steel Hardware
- Copper Tinned Marine Grade Extended Power Wire - 9ft

## BEAM PATTERN

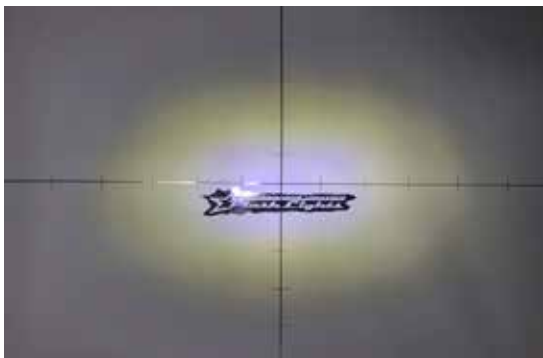

RIGID



VS

