

FEATURES




- 316 Stainless Steel Hardware and Fasteners
- Nylon Locking Nuts and Security Screws
- IP69k Rated to Protect Against Moisture / Contaminant Ingress
- DuPont® Marine Coating - Available in Black or White
- Extruded Aluminum Body
- Durable Scratch Resistant High Impact Polycarbonate Lens
- 96% Optical / Reflector Efficiency
- CE and ROHS Certified
- Genuine Gore® Waterproof Membrane with Mechanical Seal
- Deutsch® Waterproof Connectors
- Operating Temp: -40°F ~ +145°F
- Over / Under and Reverse Polarity Protection
- Protected Against Electromagnetic (EMC) And Radio Frequency Interference (RFI)
- 8.6G Vibration Compliant



SPECIFICATIONS

Part #	Beam Pattern	Distance	Led Chips	Led Lifespan	Raw Lumens*	Wattage	Volts
QUAD-CB	Combination	250M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC
QUAD-CB-WHT	Combination	250M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC
QUAD-SP	Spot	350M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC
QUAD-SP-WHT	Spot	350M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC
QUAD-FL	Flood	150M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC
QUAD-FL-WHT	Flood	150M	3W OSRAM	50,000 HRS	5,400LM	60W	9-36VDC

DIMENSIONS

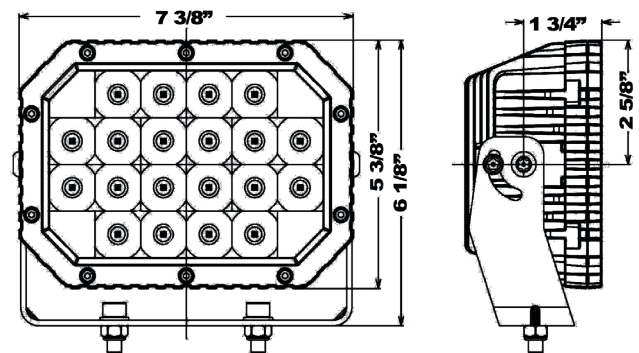

* Based on LED manufacturer specifications