
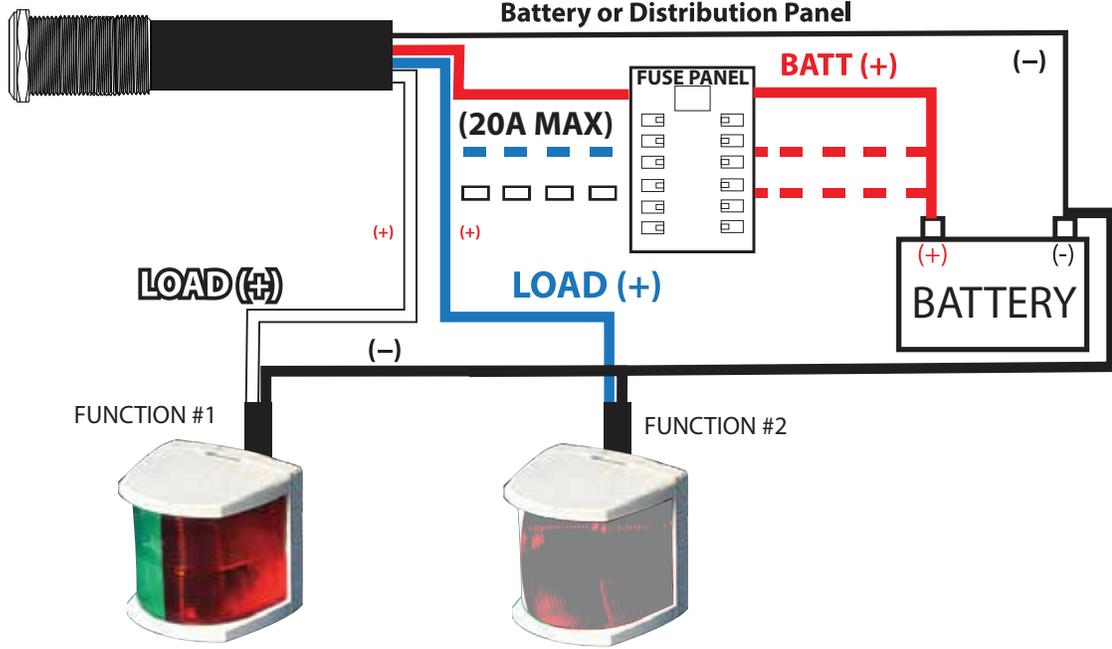


# HARSH ENVIRONMENT SWITCH


## DUAL OUTPUT

### WIRING DIAGRAM

Rear View

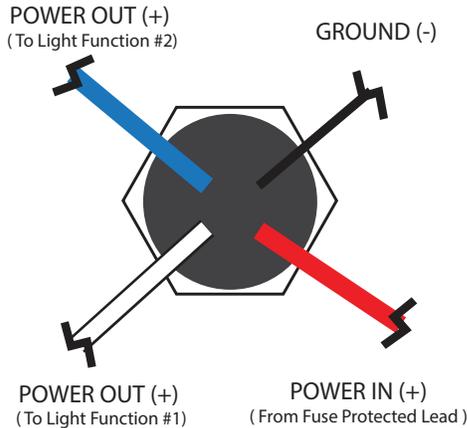

**IMPORTANT:** Proper wiring must be followed!  
Improper wiring may cause damage to switch and invalidate warranty





Need Assistance? Call Us: M - F 10am - 5pm CST (281) 414-7177 ext. 3

# HARSH ENVIRONMENT SWITCH

## DUAL OUTPUT

### SPECIFICATIONS

- 9~15V
- IP68 Rated
- Solid State Circuitry to Handle 20A
- Mechanical Lifespan 500,000 Presses
- LED Lifespan 40,000 Hours
- Operation Pressure: 4N
- Operating Temperature -4°F ~ +176°F
- Panel Mounting Thickness:  $\leq 1 \frac{3}{4}$ "(1-45mm)
- 316 Stainless Steel Housing - No Rust
- Available in Momentary Operation ONLY
- 3ft of Copper Tinned Marine Wire
- REVERT Limited Lifetime Warranty

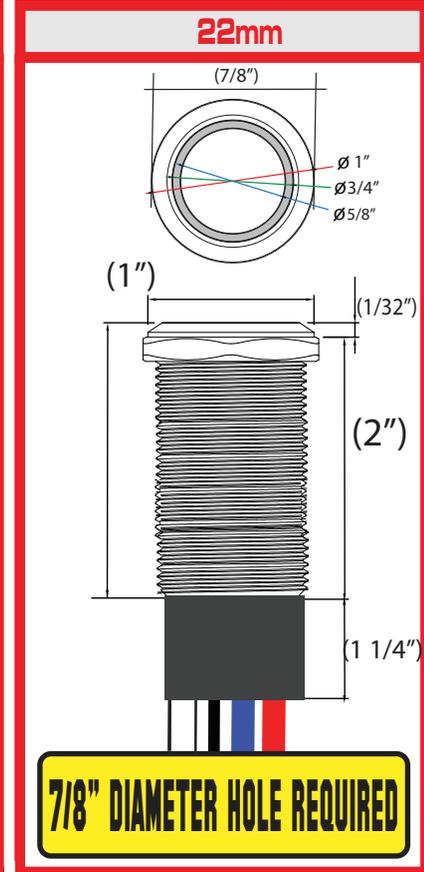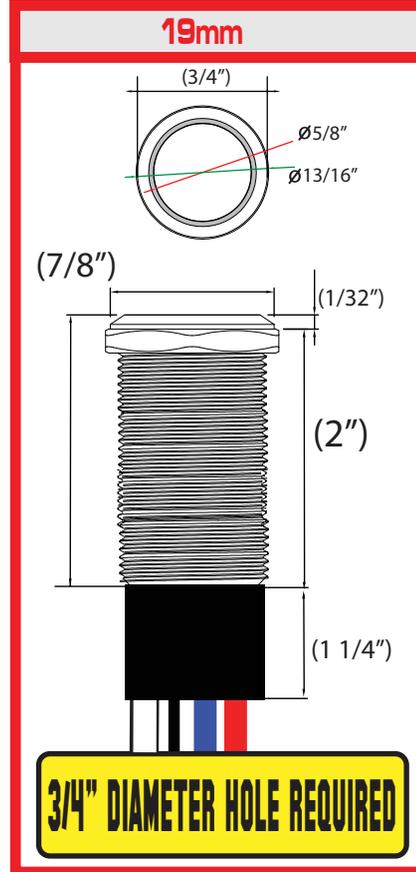

Need Assistance? Call Us: M - F 10am - 5pm CST (281) 414-7177 ext. 3

