

# **KEEPING YOU IN CHARGE**







# PSC-121000ACX 12V 1A

**Sealed Lead Acid Battery Charger ACX Battery Charger Series** 


# **FEATURES**

- Universal input voltage range 10VAC 240VAC
- Automatic, current sensing dual-rate charging for efficient, care-free and safe operation
- LED indicators
- Alligator clip connectors with insulated sleeves

# **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A.,
- F.A.A. and C.A.B. certified
- ISO9001:2015 Quality management systems
- ETL
- DOE
- FCC
- CE

## **CHARGER CHARACTERISTICS**

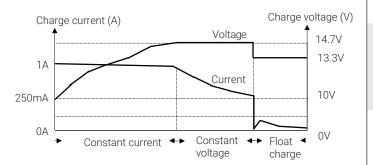

#### **GLOBAL HEADOUARTERS** (USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 365 Cabela Dr Suite 300, Reno, Nevada 89523 USA

T: +1 619 661 2020

E: customer-service@power-sonic.com

#### **POWER-SONIC EMEA**

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands

**T NL:** + 31 33 7410 700 TUK: +44 1268 560 686 TFR: +33 344 32 18 17

E: salesEMEA@power-sonic.com

#### PERFORMANCE SPECIFICATIONS

#### Input Specs

AC input voltage rating 100Vac-240Vac AC input frequency 47Hz-63Hz

AC input current 0.3@115Vac/0.19A@230Vac

23W AC input power AC static state current 50mA

#### **Output Specs**

Output voltage range 10-15Vdc 1A@12Vdc Output current Output power 15W Bulk charge current rating 1A Bulk charge voltage rating 14.7Vdc 13.3Vdc Float charge voltage rating Light switching current 250m∆ Charging capacity range 5Ah to 12Ah

## **General Specs**

0.68 Efficiency Over load protection <1.5A Short circuit protection Yes Reversed polarity connectors protection 0°C-40°C Operating temperature -30°C-85°C Storage temperature Net weight 90g **Dimensions** 80 x 50 x 57mm

Enclosure Plastic Case Application Indoor Wall mounting Charger type Plug type Type A (NEMA 1 - 15)

# Safety Specs

Withstand voltage (Hi-Pot) 3000Vac ≤ 10mA (60s) >100MΩ @500Vdc Insulation resistance ETL Safety standard

Compliance FCC

#### **LED Indicator Status**

No load or float charge Green LED on Red LED on Fast charge

# **FURTHER INFORMATION**

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.