
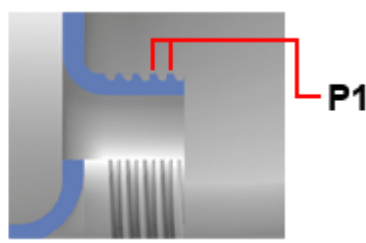


IBC Tote Threading Support Information



IBC Bottle Threads

Connection between the tote itself and the valve

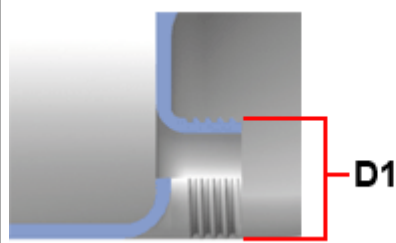



Name: S60X6 (2") male buttress
D1: 60mm (2.36")
P1: 6mm (0.24")

IBC Manufacturer: Greif, Mauser (Mamor), Sotralentz

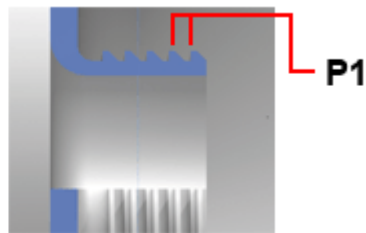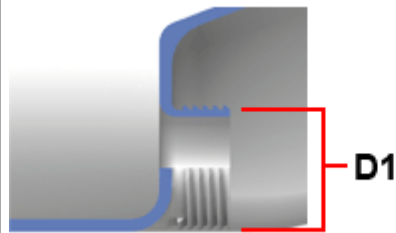



Name: S75X6 (2") male buttress
D1: 75mm (2.95")
P1: 6mm (0.24")

IBC Manufacturer: Schutz, Clawson, Fustiplast

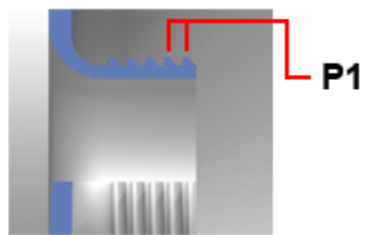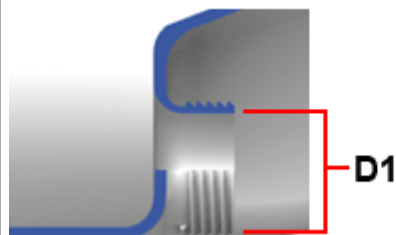

Name: S80X6 (2") male buttress
D1: 80mm (3.15")
P1: 6mm (0.24")

IBC Manufacturer: Mauser (Hoover) Repaltainer

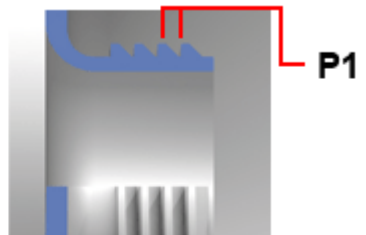
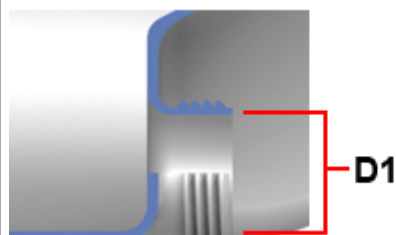


Name: S100X8 (3") male buttress
D1: 100mm (3.94")
P1: 8mm (0.32")

IBC Manufacturer: Schutz, Greif, Mauser, Fustiplast, Sotralentz


IBC Valve Threads

Connection between the valve and your equipment

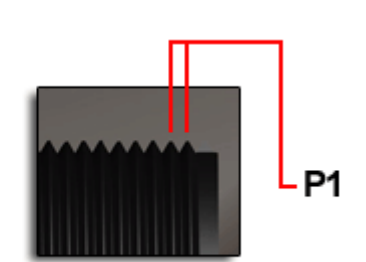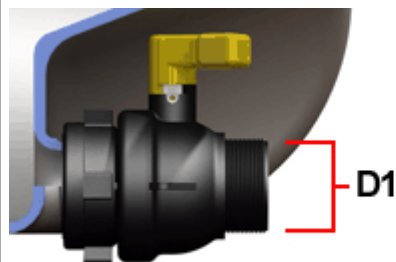

Name: 2" NPS male
D1: 59.6mm (2.35")
P1: 2.21mm (0.09" - 11.5 TPI)
Standard: ANSI B1.20.1-1983

Note: American National Standard Straight Pipe Thread

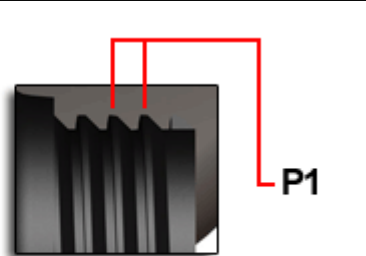

Name: S60X6 (2") male buttress
D1: 60mm (2.36")
P1: 6mm (0.24")
Standard: DIN 6131 (Schütz do not use this specification)

Note: Most common thread found on European IBC's. Also known as NW50, DIN61 or S60.



IBC Tote Threading Support Information (cont)

IBC Valve Threads
Connection between the valve and your equipment

	<p>Name: 2" Camlock male with 2" BSP D1: 63mm (2.48") (59.4mm (2.34") thread) P1: 2.3mm (0.09" 11 TPI) Standard: Camlock- A-A-59326 : 1992 Thread – BS 2779 : 1986</p> <p>Note: Camlock male adapter with added external thread for cheap and compact dust cap</p>
	<p>Name: 2" Camlock male with 2 1/8" BSP D1: 63mm (2.48") (62.7mm (2.47") thread) P1: 2.3mm (0.09" 11 TPI) Standard: Camlock- A-A-59326 : 1992</p> <p>Note: Camlock male adapter with added external over sized thread for cheap and compact dust cap and added seal area for connecting a female Camlock.</p>
	<p>Name: 2" Camlock male adapter D1: 63mm (2.48") P1: N/A Standard: Camlock- A-A-59326 : 1992</p> <p>Note: 2" Camlock male adapter fitted to an IBC</p>
	<p>Name: M80X3 male thread D1: 80mm (3.15") P1: 3mm (0.12") Standard: ISO 68 (ANSI B1.13M)</p> <p>Note: A 80mm (3.15") metric thread found mainly on the Chinese Kingtainer IBC</p>
	<p>Name: S100X8 (3") male buttress D1: 97-100mm (3.82" - 3.94") P1: 8mm (0.32") Standard: N/A</p> <p>Note: Found on a lot of 3" outlet IBC's, short length and a large thread depth</p>
	<p>Name: 3" Camlock with 3" BSP D1: 91.5mm (3.6") (87.7mm (3.45") thread) P1: 2.3mm (0.09" 11 TPI) Standard: Camlock- A-A-59326 : 1992 Thread – BS 2779 : 1986</p> <p>Note: Camlock male adapter with added external thread for cheap and compact dust cap</p>

