

MB1233 - Assembly Instructions Double Arch Flare for 37" Tire**MB1233 DOUBLE ARCH FLARE FOR 37" TIRE**

Compatible with (CJ,YJ, TJ)

**ASSEMBLY INSTRUCTIONS**


MB1233-2 Shipping

CONTENTS


2" WIDE FLARE

DRIVER


PASSENGER

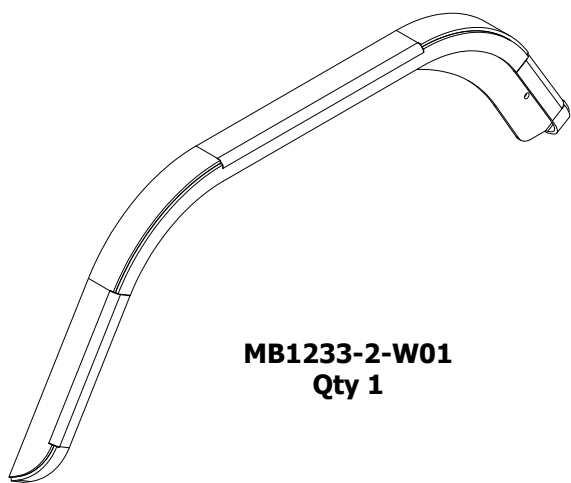

MB1233-2-W01
Qty 1

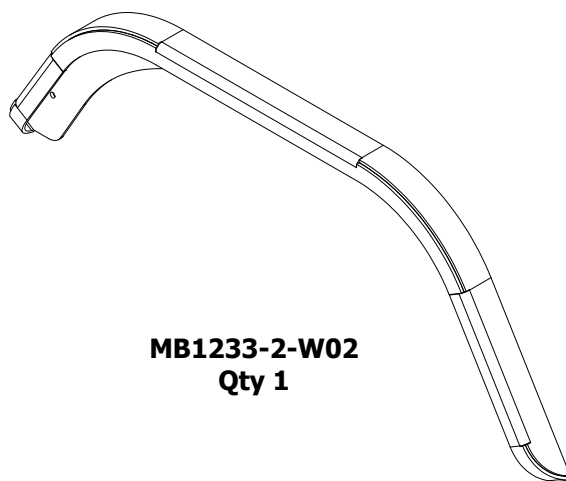


MB1233-2-W02
Qty 1







5/16-18 x 1" Hex G8 YZ
Qty12



5/16" Flat Washer G8 YZ
Qty 24




5/16"-18 Nylock Nut G8 YZ
Qty 12

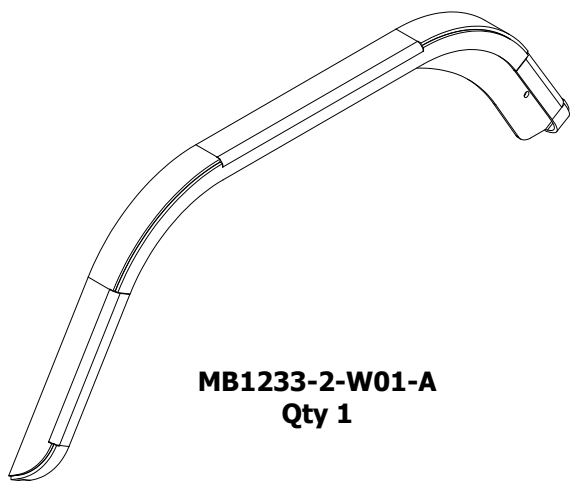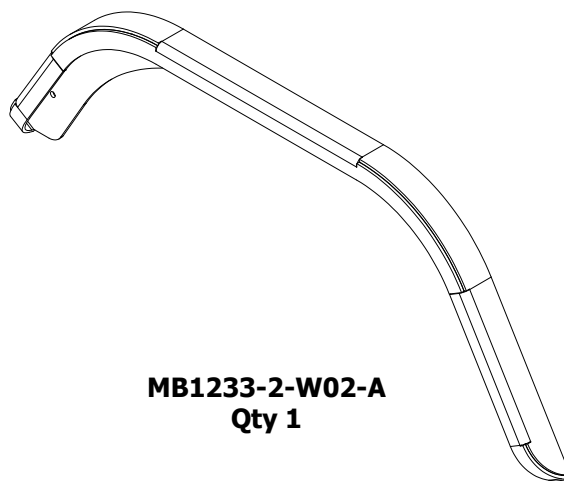MB1233-2-A-Shipping**CONTENTS**
2" WIDE ALUMINIUM FLARE**DRIVER****MB1233-2-W01-A**
Qty 1**PASSENGER****MB1233-2-W02-A**
Qty 1**5/16-18 x 1" Hex G8 YZ**
Qty12**5/16" Flat Washer G8 YZ**
Qty 24**5/16"-18 Nylock Nut G8 YZ**
Qty 12





MB1233-4-Shipping

CONTENTS
4" WIDE FLARE

DRIVER

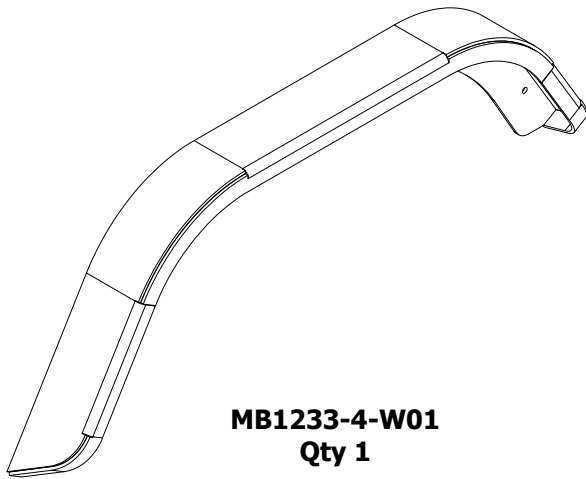

PASSENGER

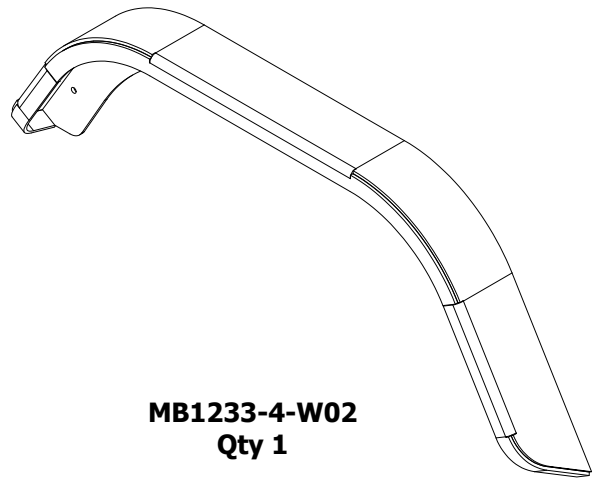


MB1233-4-A-Shipping


CONTENTS 4" WIDE ALUMINIUM FLARE

DRIVER


PASSENGER

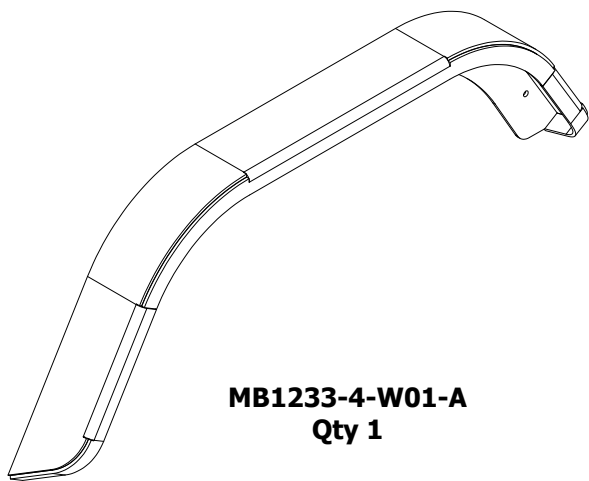

MB1233-4-W01-A
Qty 1

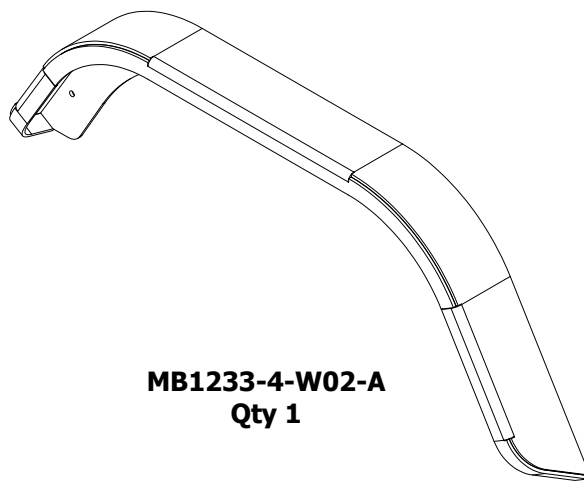


MB1233-4-W02-A
Qty 1



5/16-18 x 1" Hex G8 YZ
Qty12



5/16" Flat Washer G8 YZ
Qty 24



5/16"-18 Nylock Nut G8 YZ
Qty 12




Preparation and Installation Guide

Compatibility: This product fits jeep CJ, YJ, TJ and LJ with corner armor and Running a 37" tire if you are running a larger tire look at MB1234. This is specially designed to work with Motobilt Corner armor and Motobilt rocker guards.

- 1. Prepare and Inspect:** Unbox and inspect all components to ensure everything is included and free of damage.
- 2. Prep for Install:** Begin by cleaning the area where the flares will be mounted to. Place painters tape or similar on the tub to prevent scratching when installing and drilling.
- 3. Drilling:** After drilling holes use desired paint on holes to prevent rusting.

Pro Tip: Use STEEL-IT paint, which can be welded through and easily touched up afterward.

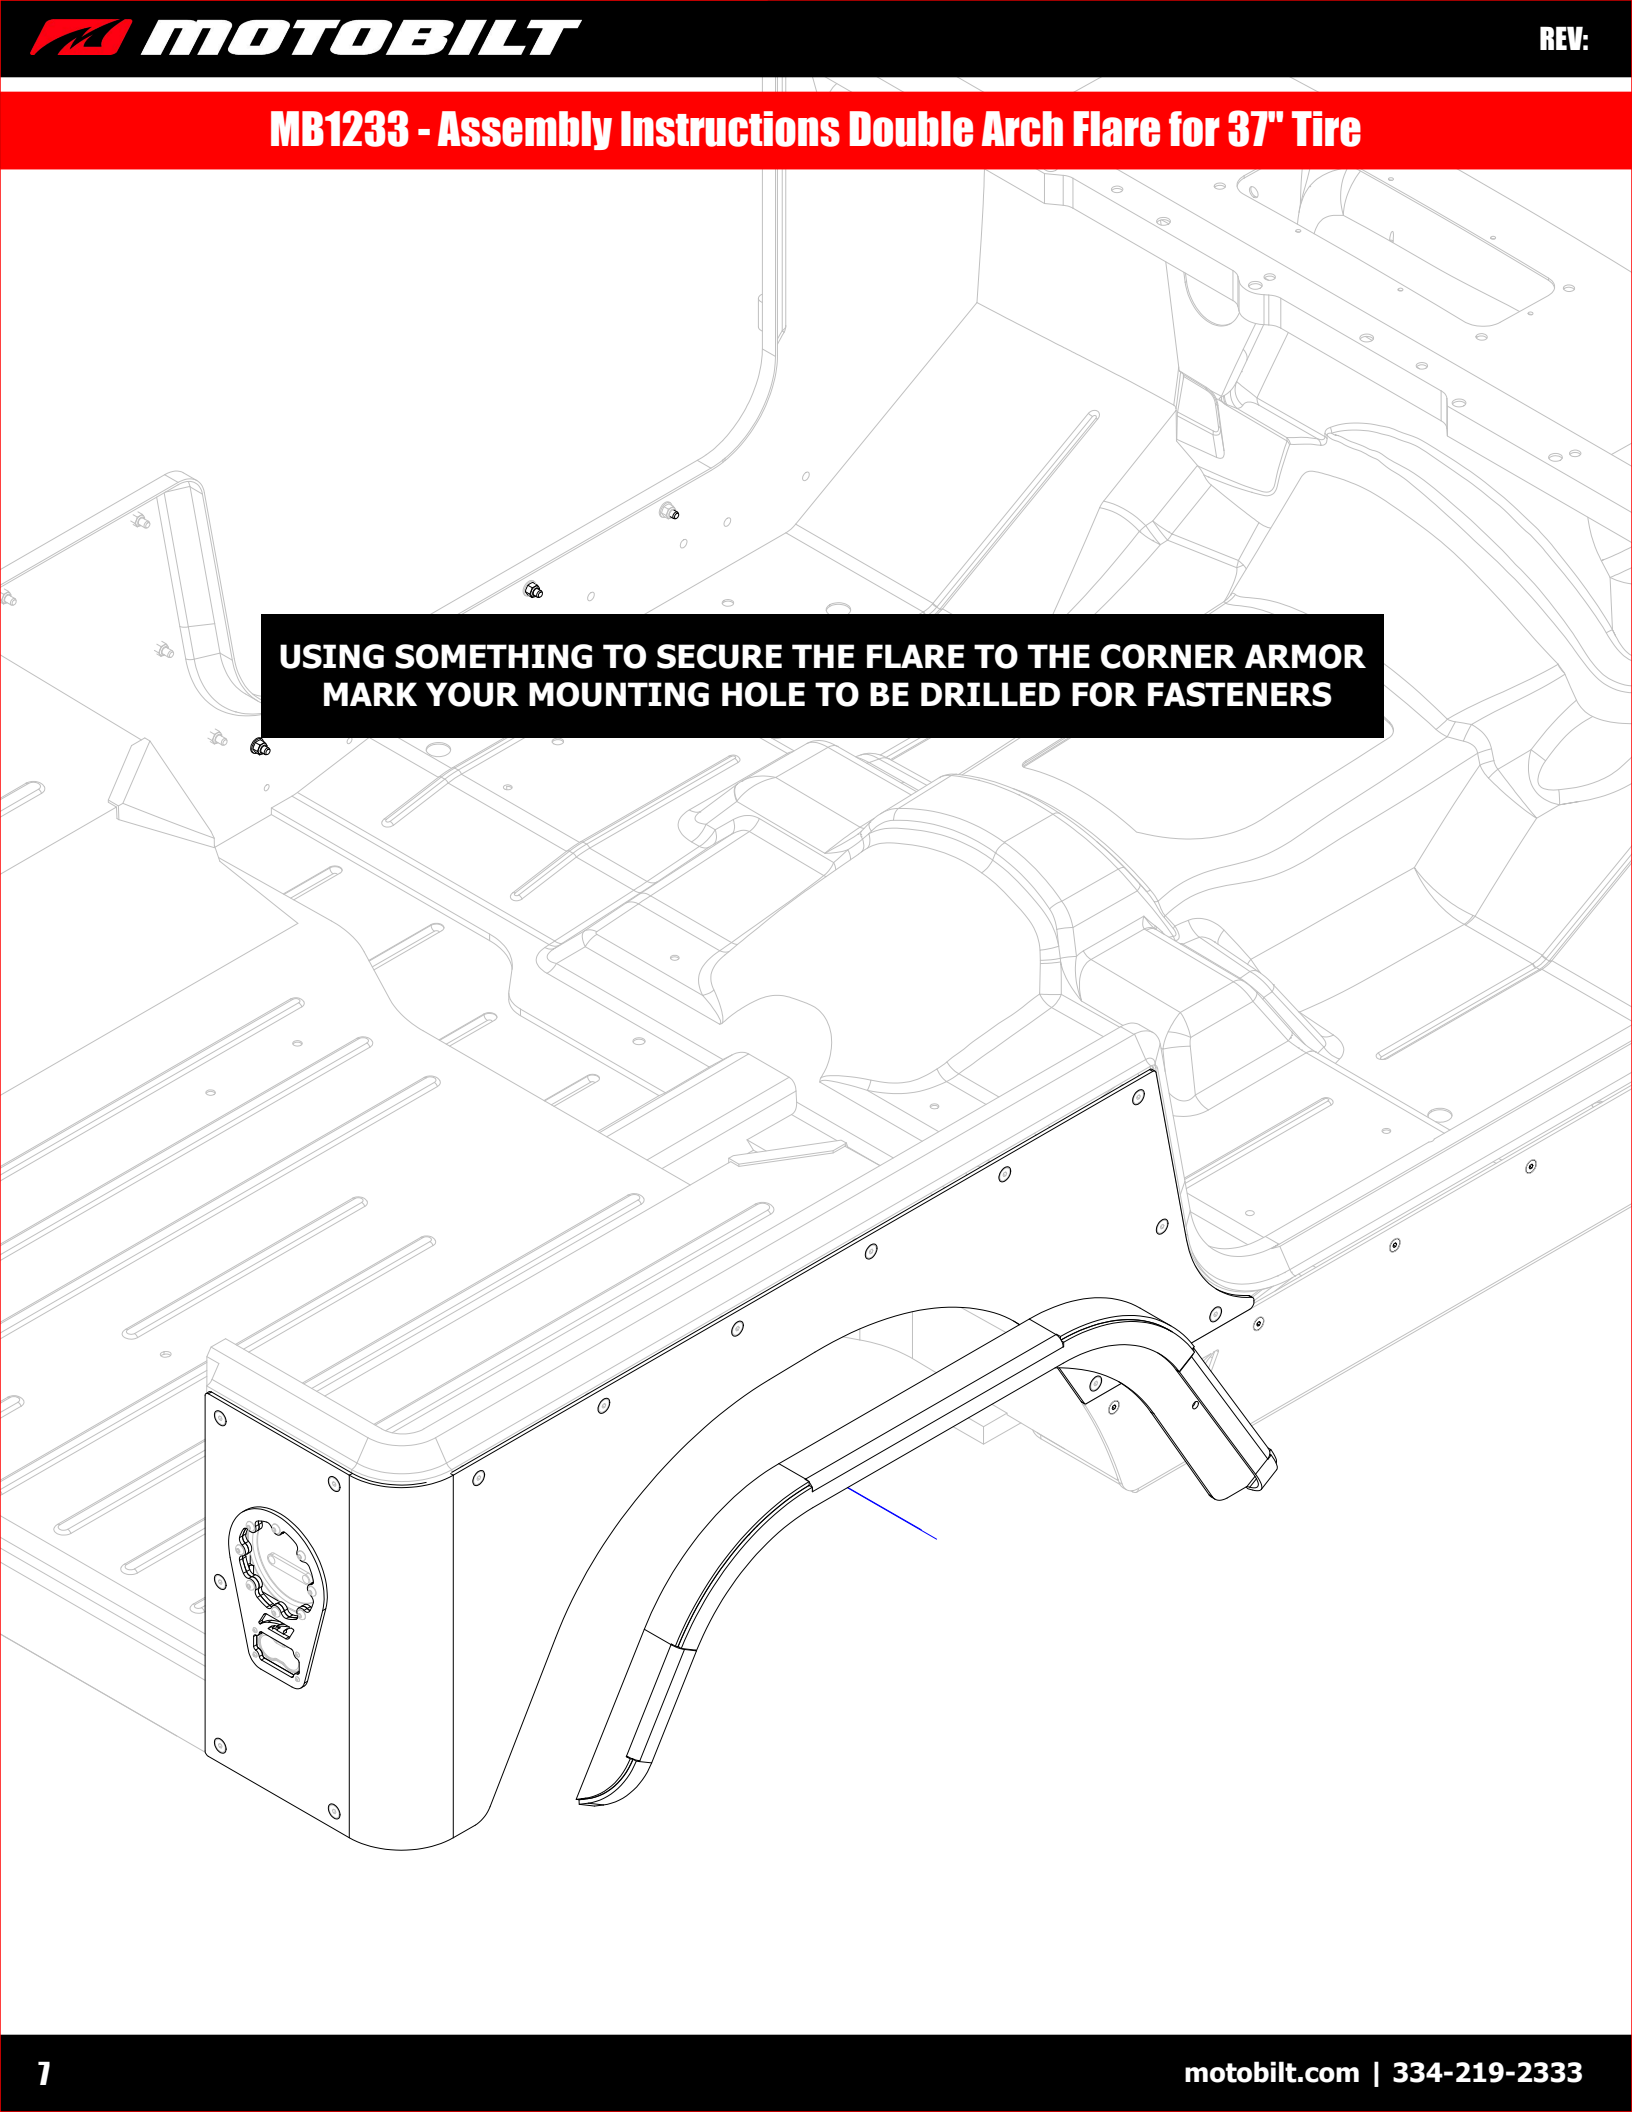
MB1233 - Assembly Instructions Double Arch Flare for 37" Tire

**USING SOMETHING TO SECURE THE FLARE TO THE CORNER ARMOR
MARK YOUR MOUNTING HOLE TO BE DRILLED FOR FASTENERS**

MB1233 - Assembly Instructions Double Arch Flare for 37" Tire


DRILL A 3/8" HOLE FOR ALL THE MARKED FASTENING LOCATIONS


Use this hole if being used on a YJ

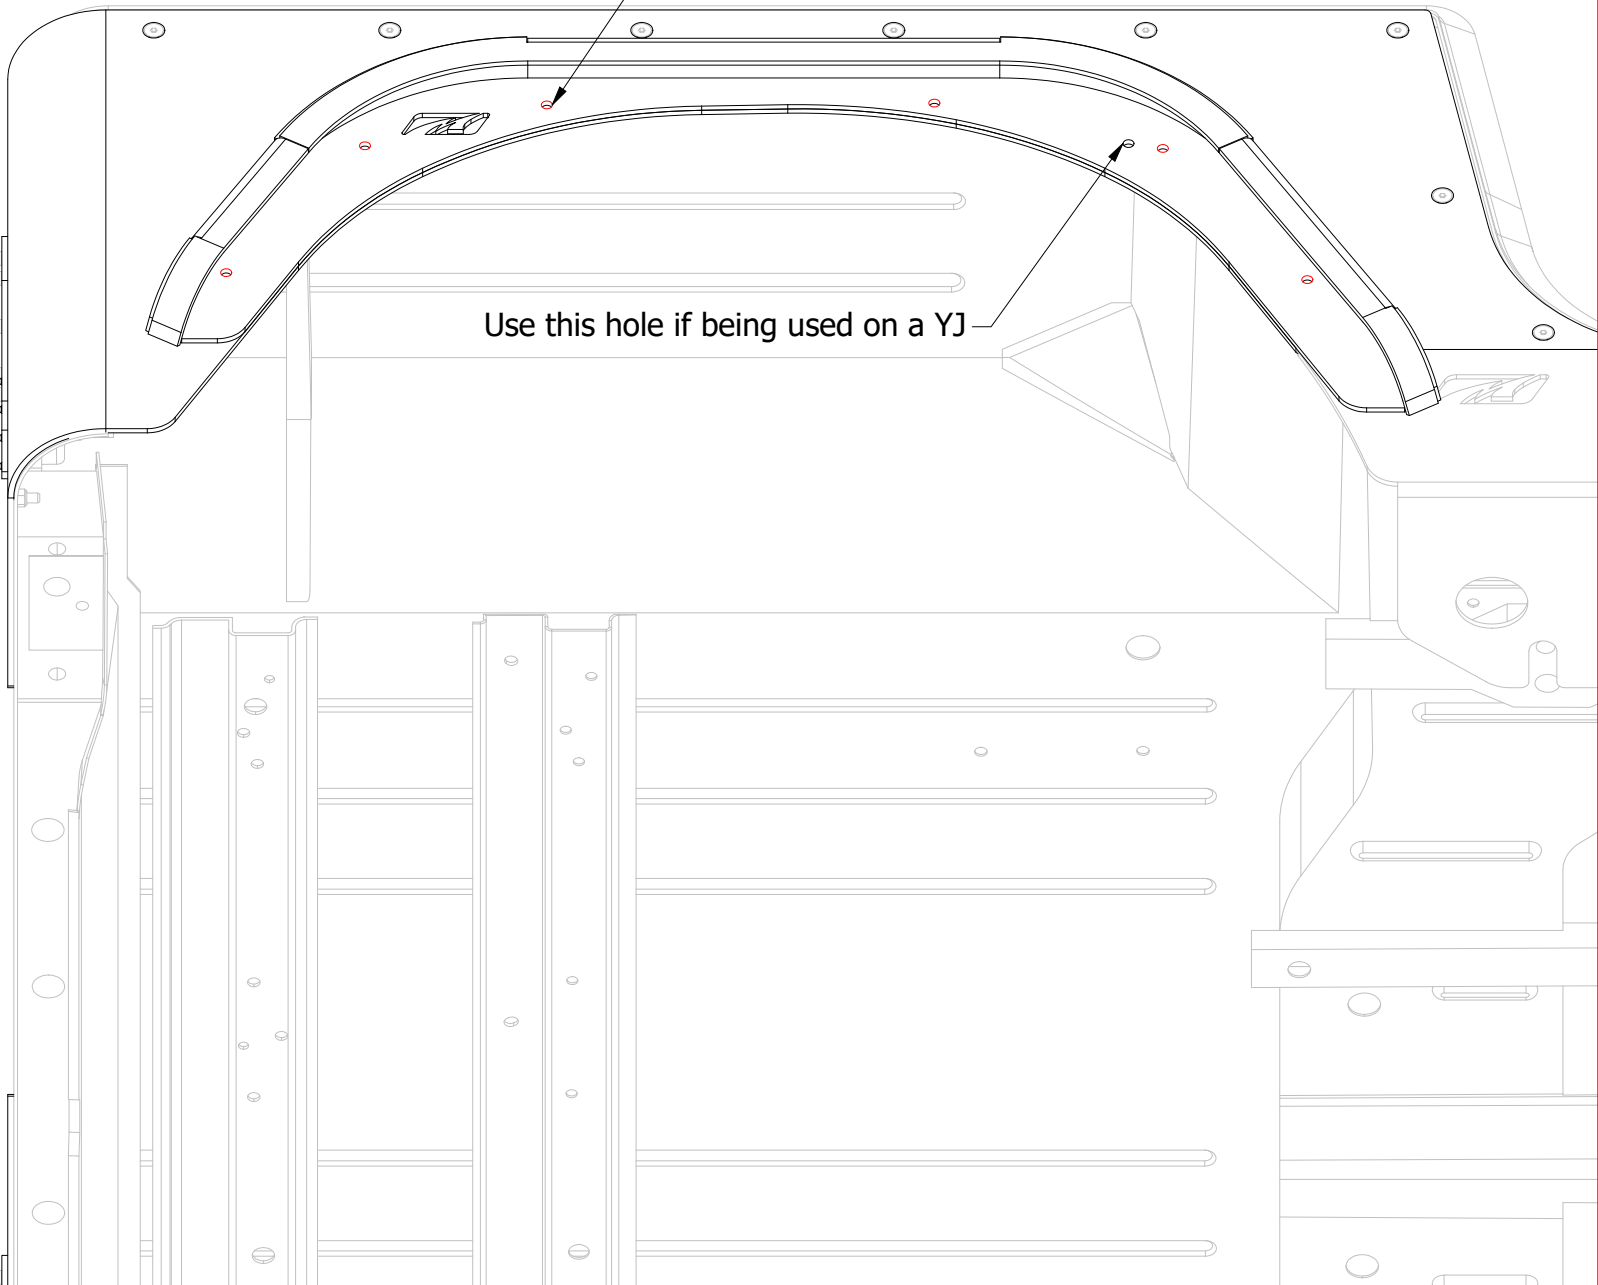

MB1233 - Assembly Instructions Double Arch Flare for 37" Tire

SECURE FLARES WITH PROVIDED FASTENERS

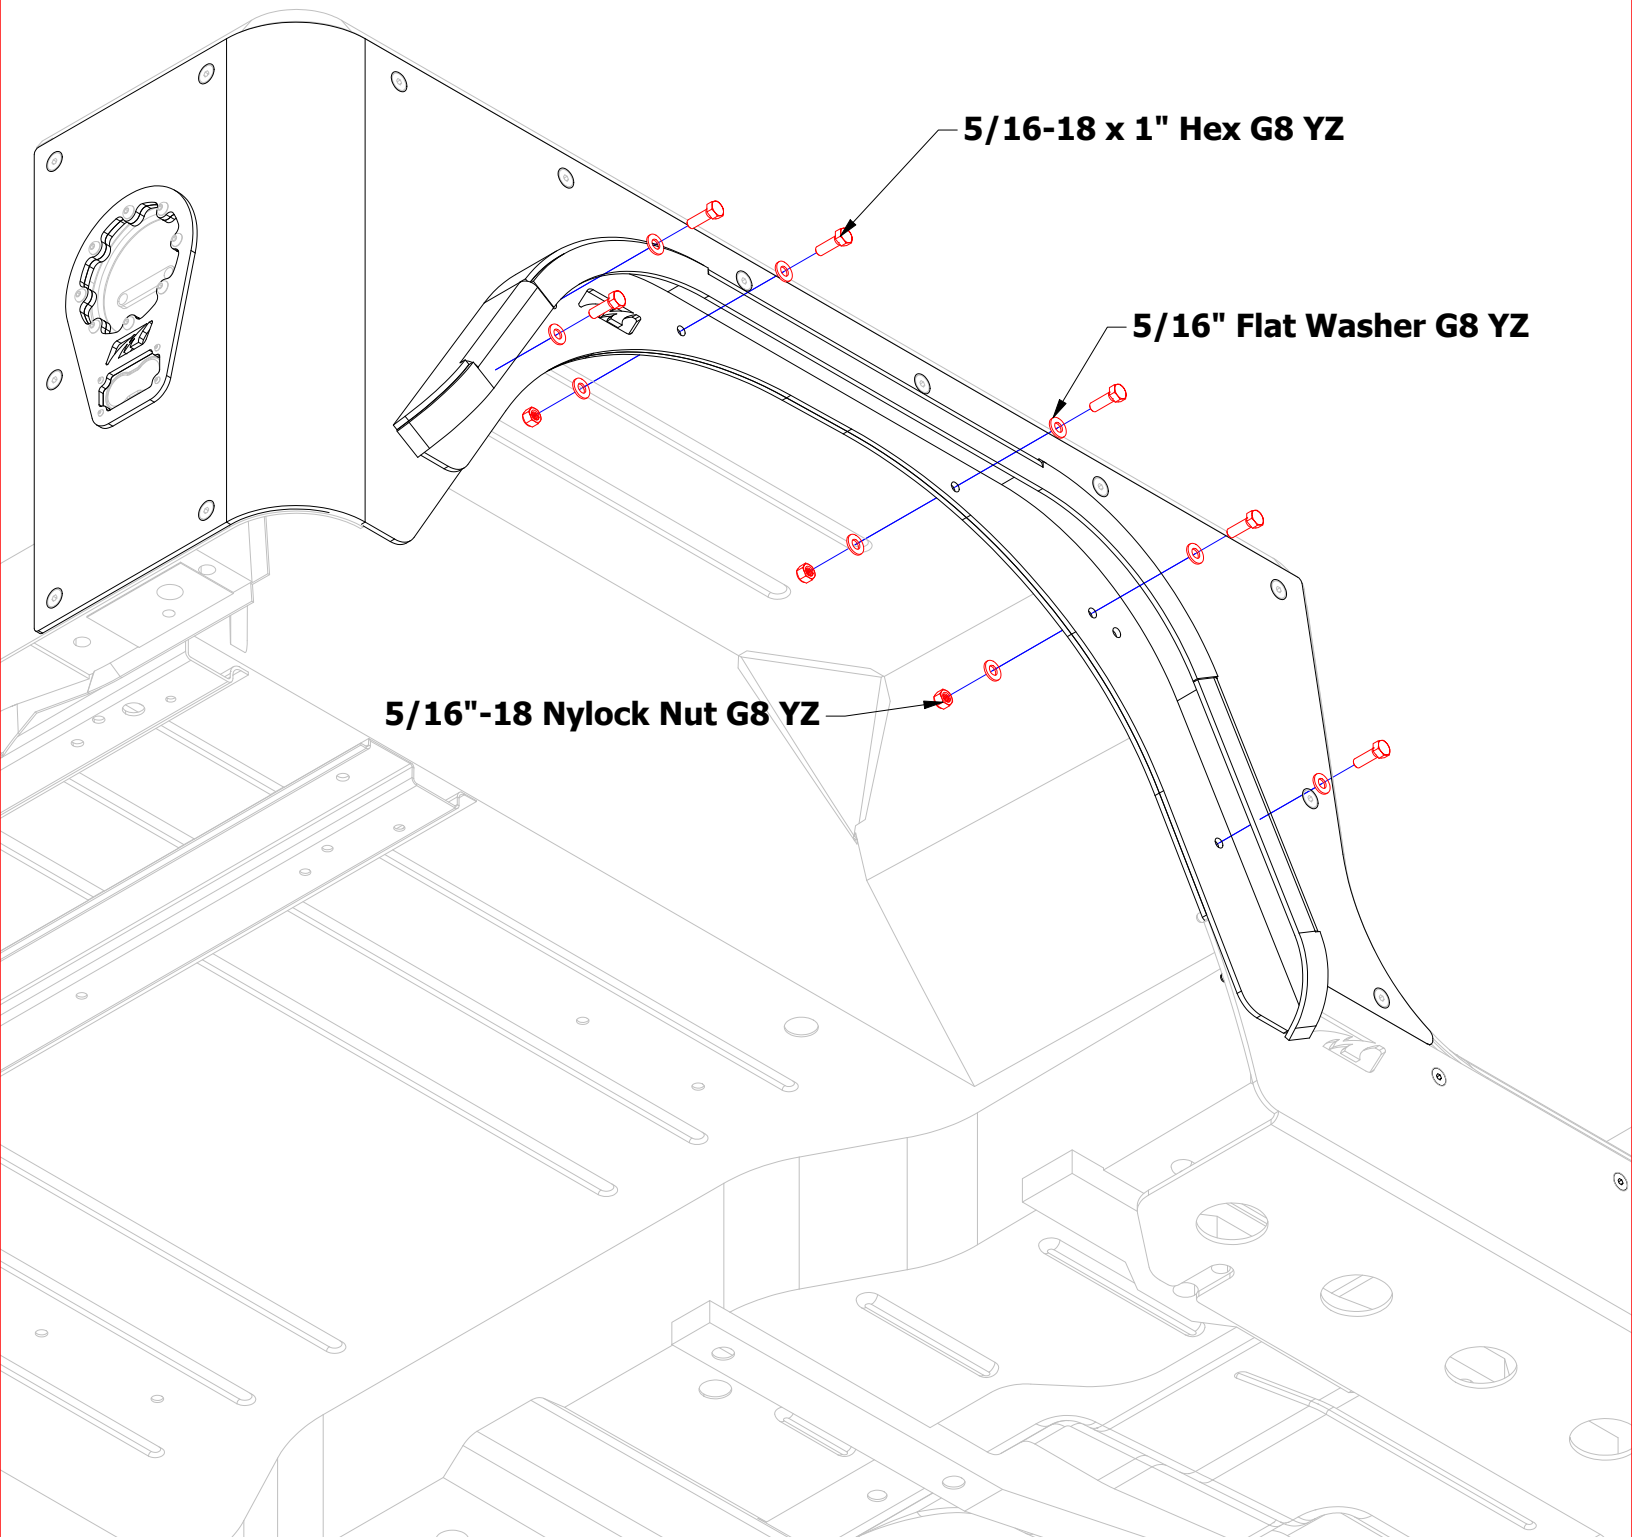

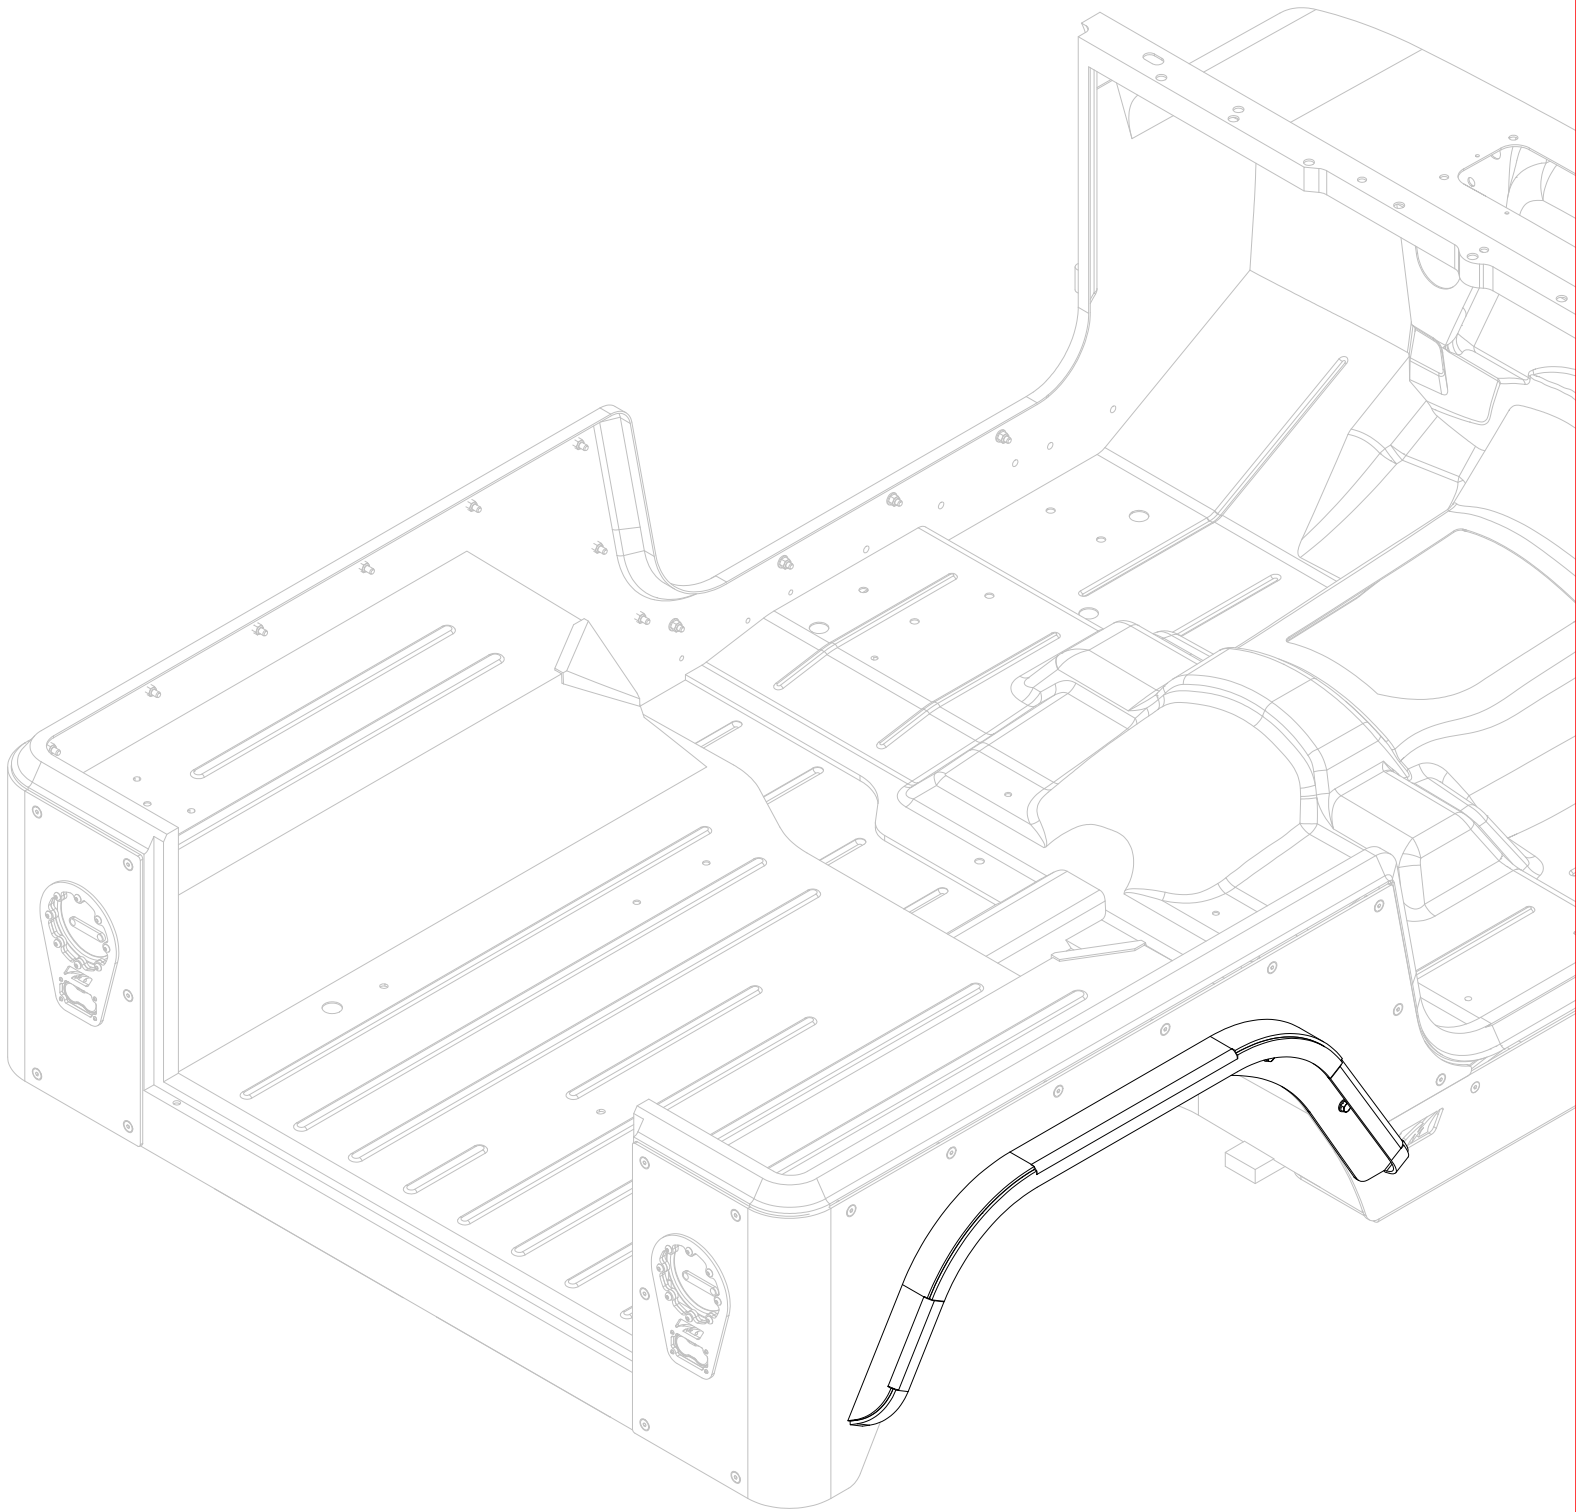MB1233 - Assembly Instructions Double Arch Flare for 37" Tire



LEGAL DISCLAIMER

Motobilt, Inc. products are designed and manufactured primarily for **OFF-ROAD USE ONLY**. They are not certified or approved for street or highway use and may not comply with vehicle safety standards or regulations. Vehicle modifications, including the installation of Motobilt, Inc. products, may alter the handling, performance, and durability of a vehicle.

By purchasing, installing, or using any Motobilt, Inc. product, the purchaser and installer expressly acknowledge and agree to the following terms:

1. ASSUMPTION OF RISK

The purchaser and installer understand and accept that the installation and use of aftermarket products involve inherent risks, including but not limited to vehicle damage, property damage, serious injury, or death. All such risks are voluntarily assumed.

2. NO WARRANTY OF SAFETY

Motobilt, Inc. makes no representations, warranties, or guarantees, express or implied, regarding the safety, performance, or structural integrity of its products. Motobilt, Inc. products are not intended to prevent injury or death in the event of an accident, rollover, or collision.

3. INSTALLATION RESPONSIBILITY

Some Motobilt products require advanced fabrication, cutting, or welding skills. Others may require specialized tools or mechanical knowledge. Motobilt, Inc. is not responsible for improper installation, modification, or misuse of its products. Professional installation by a qualified individual is strongly recommended.

4. COMPLIANCE WITH LAWS AND REGULATIONS

The purchaser and installer are solely responsible for ensuring that the vehicle and installed products comply with all applicable local, state, and federal laws and safety regulations. Vehicle modifications may void factory warranties and may render the vehicle illegal for use on public roads.

5. MAINTENANCE AND INSPECTION

All products should be inspected regularly for signs of wear, fatigue, or damage. Continued use of damaged or improperly installed equipment increases the risk of failure and potential injury. The responsibility for inspection and maintenance rests solely with the owner and operator.

6. WARRANTY DISCLAIMER

Unless expressly stated in a written limited warranty issued by Motobilt, Inc. for a specific product, all Motobilt, Inc. products are sold "as is" and without express warranties of any kind. If a written limited warranty applies, its terms are exclusive and govern the extent of Motobilt, Inc. obligations.

To the fullest extent permitted by law, Motobilt, Inc. expressly disclaims all implied warranties, including but not limited to implied warranties of merchantability, fitness for a particular purpose, and non-infringement. No oral or written statement by Motobilt, Inc., its employees, dealers, or representatives shall constitute or create any warranty, obligation, or liability beyond what is contained in official written documentation issued by Motobilt, Inc.

7. LIMITATION OF LIABILITY

To the fullest extent permitted by law, Motobilt, Inc. disclaims all liability for any direct, indirect, incidental, consequential, or punitive damages arising out of the purchase, installation, or use of its products. This includes, but is not limited to, claims for property damage, personal injury, loss of use, or loss of income.

8. USER ACKNOWLEDGMENT

By purchasing, installing, or using Motobilt, Inc. products, the purchaser and installer acknowledge that they have read, understood, and accepted the terms of this disclaimer and voluntarily assume all associated risks.