


## **MB3056 - REAR HALF DOORS**


**COMPATIBLE WITH JEEP JKU** 





## **ASSEMBLY INSTRUCTIONS**

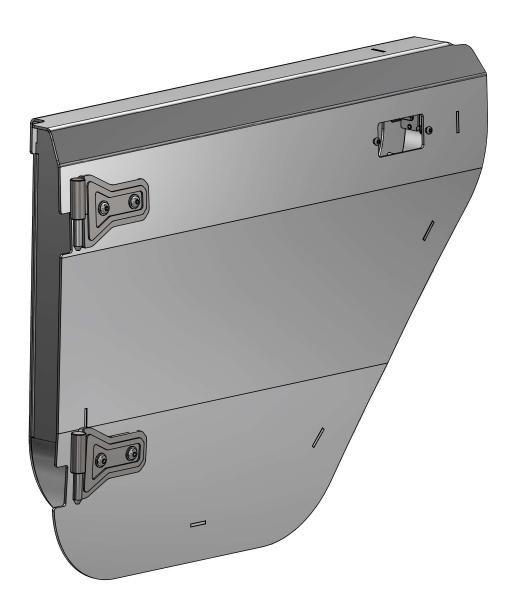



#### **CONTENTS**

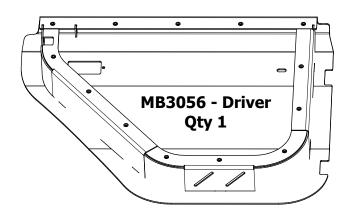
















MB3064-JKB Hinge, Lower Driver Qty 1

# BAG LABELED AS MB3056-KIT01



MB3064-JKT\_MIR Hinge, Upper Passenger Qty 1



MB3064-JKB\_MIR Hinge, Lower Passenger Qty 1



Round Head Screw, Stainless 5/16"-18 UNC x 1.00" Long Qty 8




Flat Washer, Stainless 5/16" Qty 16




Nylock Nut, Stainless 5/16" UNC Qty 8




#### **CONTENTS**

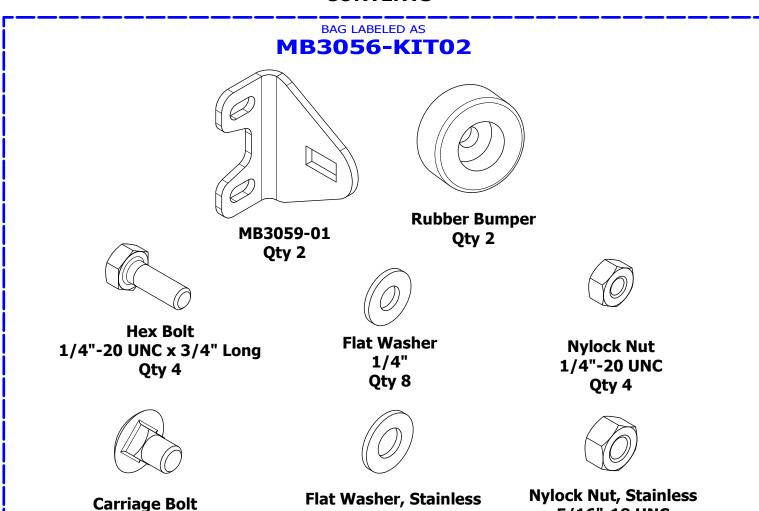






Nylock Nut, Stainless 5/16"-18 UNC Qty 2

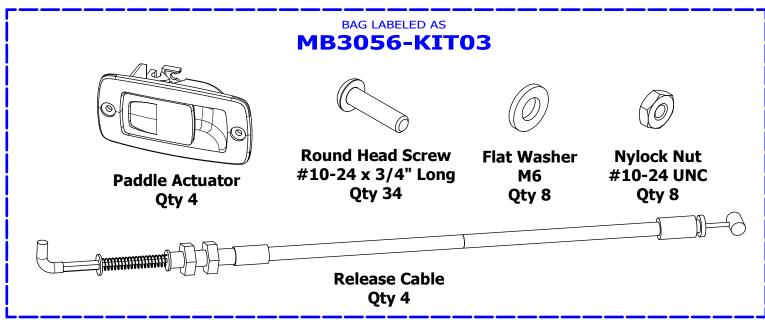




#### **CONTENTS**

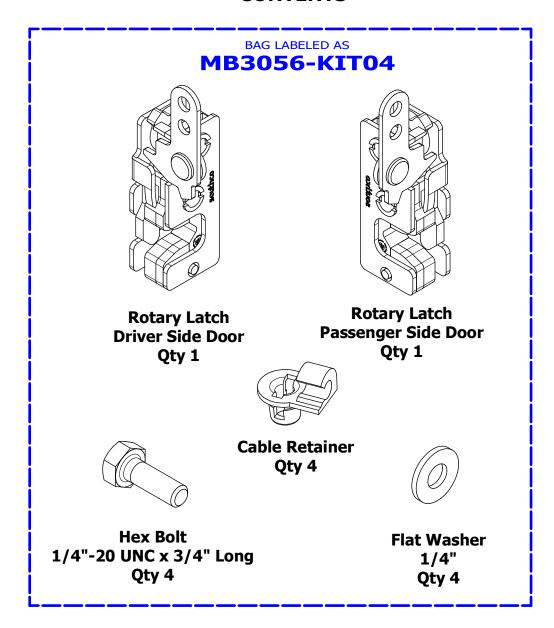




#### MB3043 - Assembly Instructions Rear Half Doors JL/JLU/JT

#### **ASSEMBLY - STEP 1**

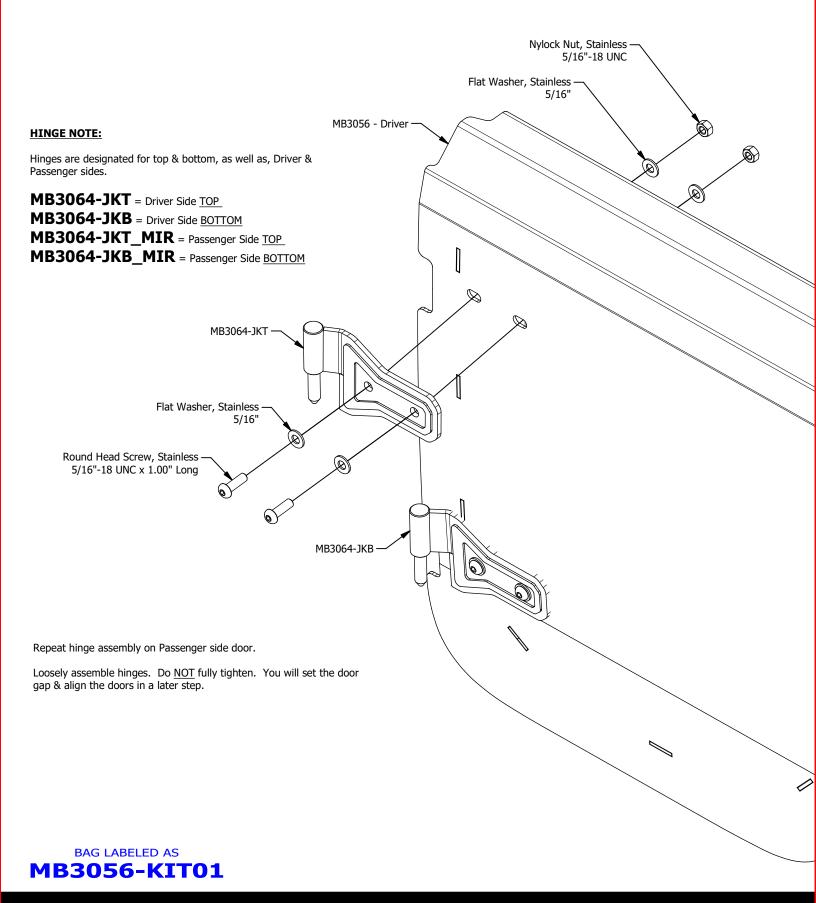





#### **ASSEMBLY - STEP 2**

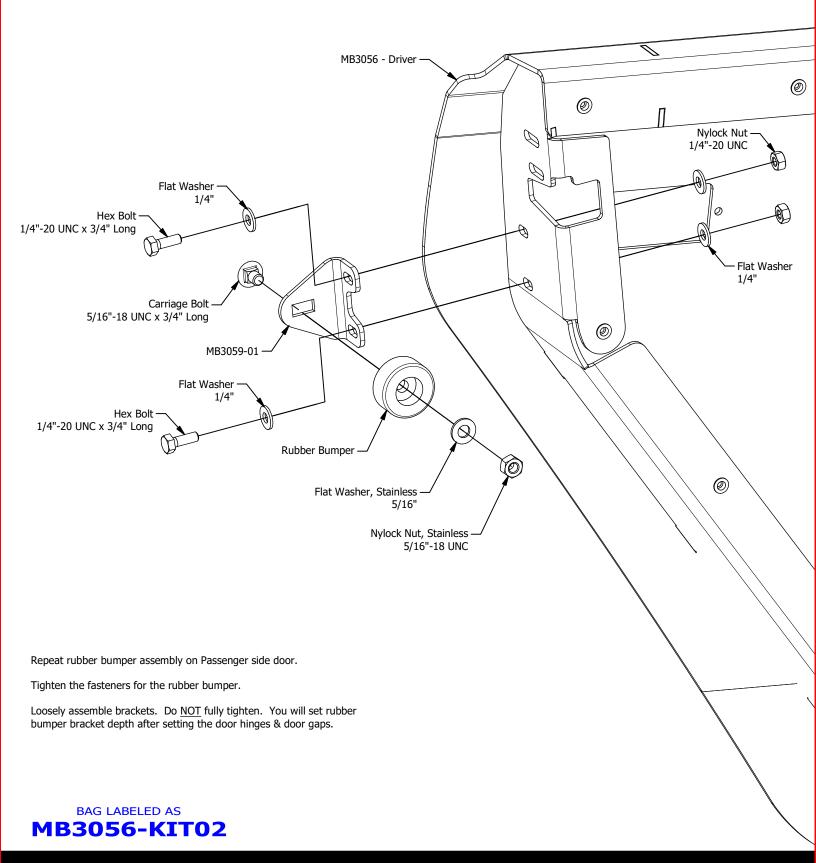



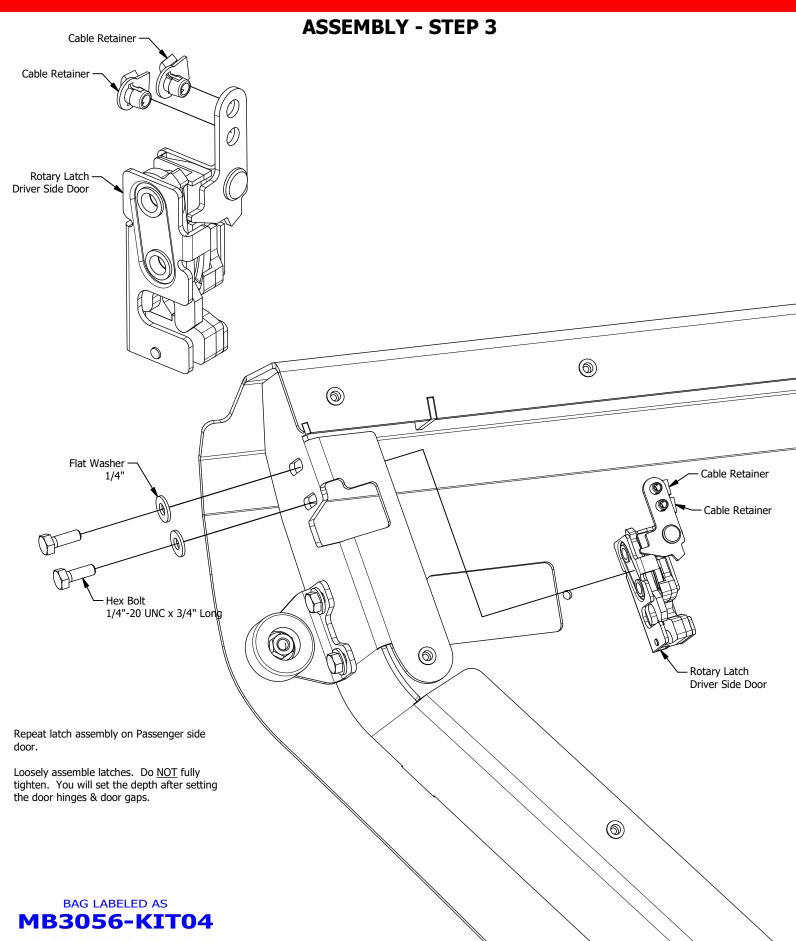




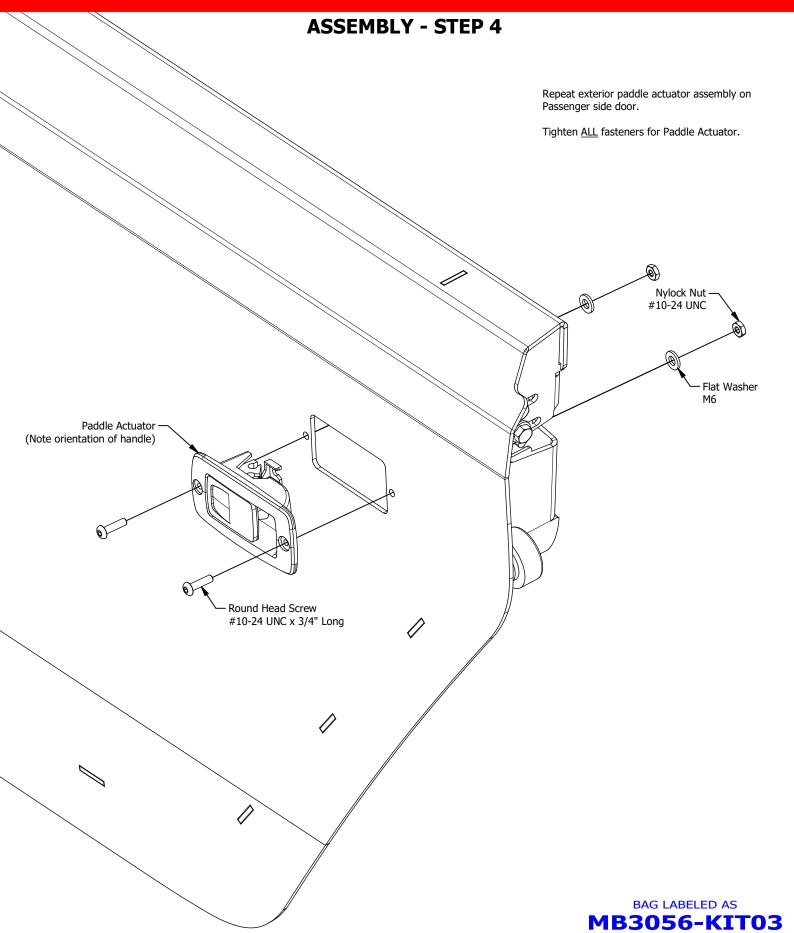



#### **ASSEMBLY - STEP 5**

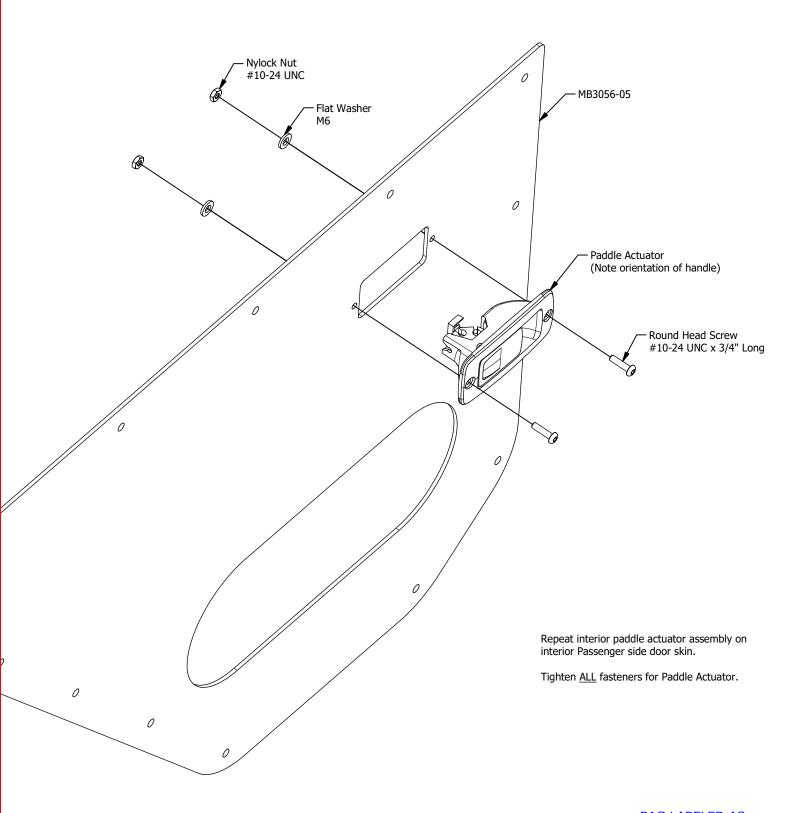


BAG LABELED AS

MB3056-KIT03




### **ASSEMBLY - STEP 6**

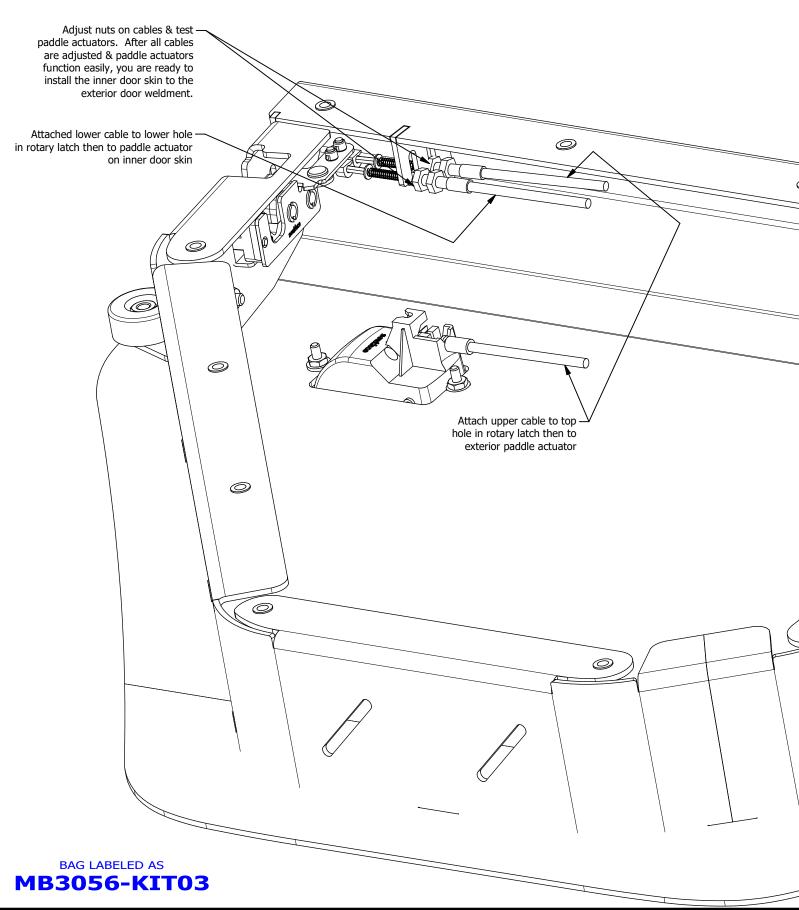



#### **ASSEMBLY - STEP 7**

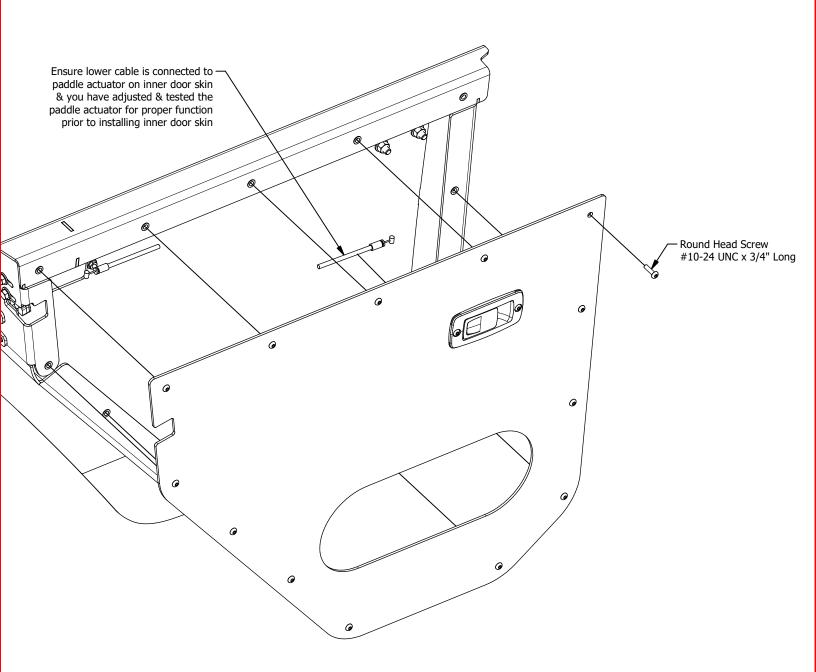

BAG LABELED AS

MB3056-KIT03



#### **ASSEMBLY - STEP 8**

#### FINAL ASSEMBLY & ADJUSTMENT

1. Ensure hinge bolts are loose

12

- 2. Place assembled half door on vehicle door hinges
- 3. Close the door & view the door from the side of the vehicle
- 4. Adjust the door to ensure there is an even reveal & gaps from left to right & top to bottom
- 5. With the door remaining closed, tighten the hinges bolts
- 6. Open the door & adjust the rotary latch fasteners as well as the rubber bumper so that the door latches smoothly & the door sits flush with the outer body

