

Model:D4099-301

characteristics:

It is used to drive IGBT,MOS pipe and transmit high-frequency signal isolation.

Technical indicators:

Installation method: PCB


Flame resistance: UL94-V0

Operating temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

Storage temperature: $-40^{\circ}\text{C}\sim+90^{\circ}\text{C}$

Frequency range: 30KHz~200KHz


Dielectric strength: 3.1KV 50Hz 2s

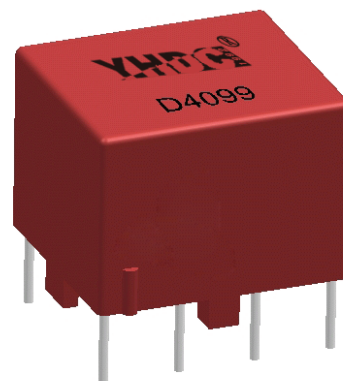

Electrical parameters:


Vout microsecond integral	150	μVs
Pulse width (D=1:2)	5	μs
Ratio	3:1	
Input amplitude	30	V
Output amplitude	8.8	V
Load impedance	100	Ω
Leading edge time	≤ 1	μs
Main circuit operating voltage	380	V
Weight		g

Connection diagram:

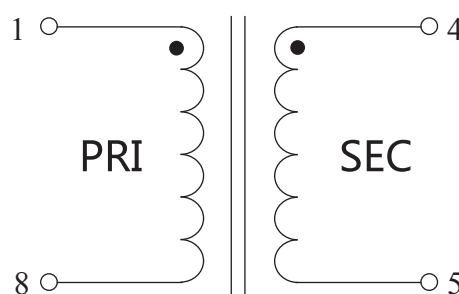


pin 3, 6 are null.

Dimensions (in mm) :

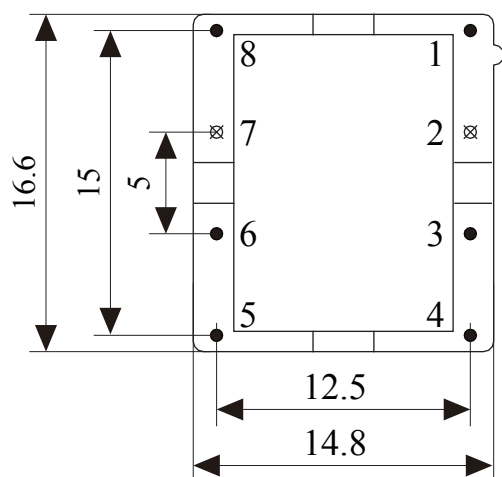

Bottom View

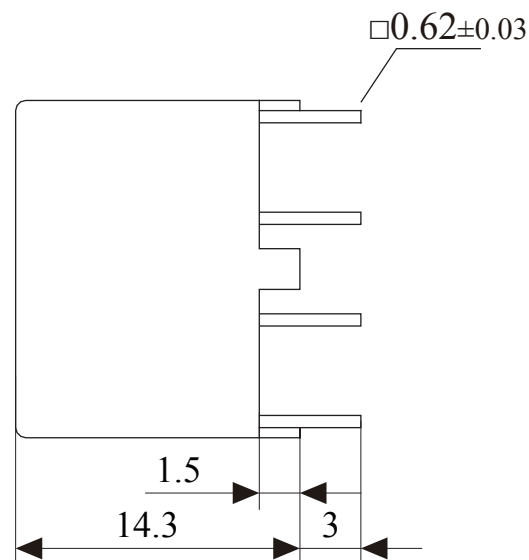

Side View