

Characteristics:

- 1. Vacuum epoxy resin encapsulated,100℃/6 hours high temperature aging, long woking life 20 years and with high delectric strength.
- 2. High quality H18 silicon steel sheet, low temperature rise, high efficiency.
- 3. PBT engineering plastic, environmental protection, flame retardant, no deformation at 120℃
- 4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

Technical index:

Mounting type: Din-rail mounting

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30℃ ~+40℃


Work frequency: 50Hz~60Hz

Dielectric strength: Pri/Sec 3.75KV 50Hz 1min 5mA
Sec 500V 50Hz 1min 5mA


Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110V	220V	230V	380V	Unit
Primary voltage range	± 10				%
Power	40				VA
Voltage regulation	≤ 12				%
Temperature rising	≤ 28				℃
No-load loss	≤ 2. 5				W
Weight	700				g

Dimensions (in mm±0.5)

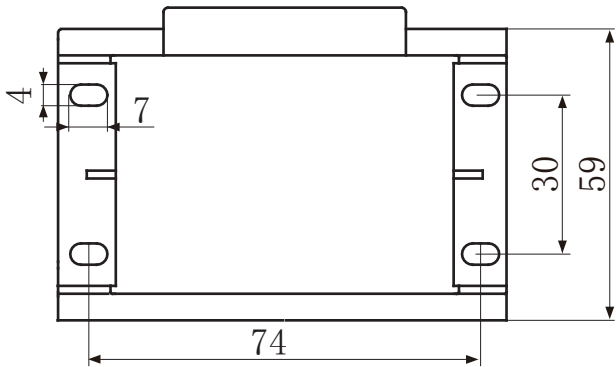

Front view

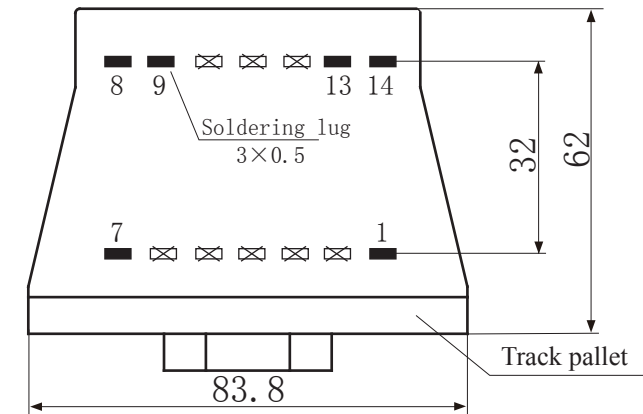

Top view

Product picture print for reference only, subject to the actual product



Standard output parameters table:
(Ex-factory to full-load voltage shall prevail)

Secondary output voltage		Secondary no-load Voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6. 9V	6. 9V×2	6666mA	3333mA×2
7. 5V	7. 5V×2	8. 6V	8. 6V×2	5333mA	2666. 5mA×2
9V	9V×2	10. 3V	10. 3V×2	4444mA	2222mA×2
12V	12V×2	13. 8V	13. 8V×2	3333mA	1666. 5mA×2
15V	15V×2	17. 2V	17. 2V×2	2666mA	1333mA×2
18V	18V×2	20. 7V	20. 7V×2	2222mA	1111mA×2
24V	24V×2	27. 5V	27. 5V×2	1666mA	833mA×2

Schematic diagram:

