

Characteristics:

1. Vacuum epoxy resin encapsulated, 100°C /6 hours high temperature aging, long working life 20 years and with high dielectric strength.
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

Technical index:

- Mounting type: PCB
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30°C ~+40°C
- Work frequency: 50Hz~60Hz
- Dielectric strength: 3.75KV 50Hz 1min




Standard output parameter table: (Factory based on full-load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	2×6V	8V	2×8V	500mA	2×250mA
7.5V	2×7.5V	10V	2×10V	400mA	2×200mA
9V	2×9V	12V	2×12V	333mA	2×166.5mA
12V	2×12V	16V	2×16V	250mA	2×125mA
15V	2×15V	20V	2×20V	200mA	2×100mA
18V	2×18V	24V	2×24V	166mA	2×83mA
24V	2×24V	32V	2×32V	125mA	2×62.5mA


Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110V	220V	230V	380V	Unit
Primary voltage range	±10				%
Power (output)	3				VA
Voltage regulation	≤25				%
Temperature rising	≤22				°C
No-load loss	≤0.23				W
Weight	147				g


Schematic diagram:

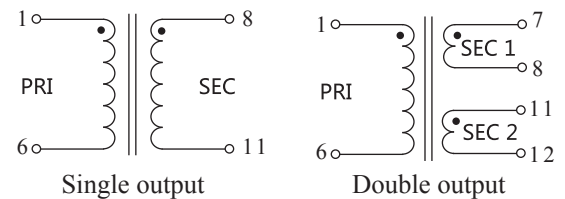

Dimensions (in mm ± 0.5) :

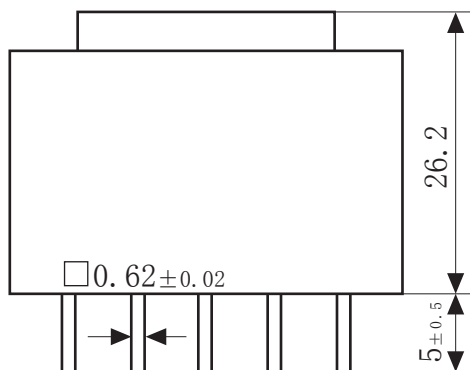

Front view

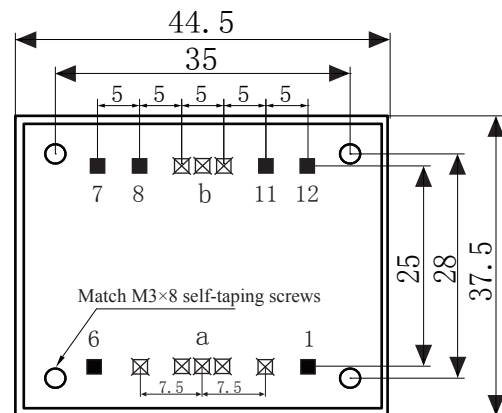

Bottom view