

Characteristic:

Safety lock buckle, easy installation, cable output

Product picture printing is for reference only,
subject to the actual product

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Ferrite

Applicable standards: GB20840-2014

Operating temperature: -25 °C ~ +60 °C

Storage temperature: -30 °C ~ +90 °C

Frequency range: 50Hz-1KHz

Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz


Output/Housing AC 3.5KV/1min 50Hz




Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	5A	10A	15A	20A	25A	30A	50A	60A	100A	A	Specification of cable: 2 x 0.2mm ² two core shielded cable Length of cable:100cm~105cm
Rated output	1									V	
Accuracy	1									%	
Weight	50g									g	Voltage output type Secondary is not allowed to short circuit


Dimensions(in mm±0.5) :

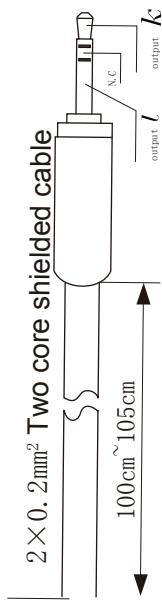

Standard 3.5 audio plug

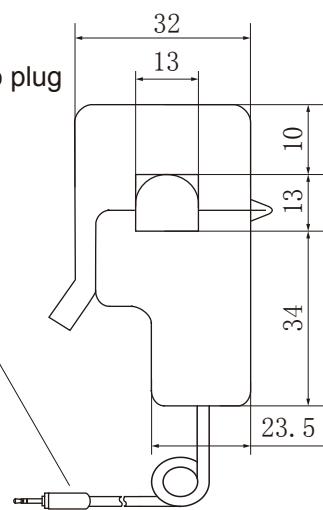

Front view

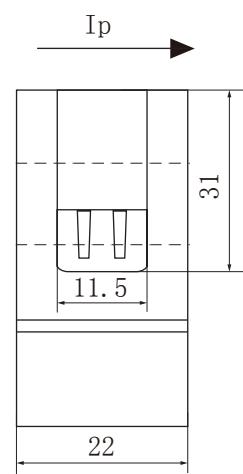

Side view

