

### Characteristic:

Safety lock buckle, easy installation, cable output


Product picture : (the printed words are for reference only, subject to the actual product)

### Technical index:


- Mounting type: Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-1KHz
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz  
Output/Housing AC 3.5KV/1min 50Hz





**Electrical parameters:** (The following parameters are typical values and actual values will be subject to product testing)

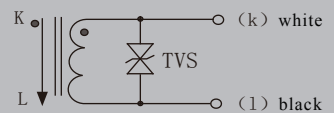Rated input	50	100	120	150		160	200		A	Specification of cable: 0.3mm <sup>2</sup> black and white twisted pair Length of cable: 50cm~55cm 
Rated output	100	100	40	100	50	40	100	50	mA	
Turns ratio	1:500	1:1000	1:3000	1:1500	1:3000	1:4000	1:2000	1:4000	-	
Sampling resistance	10								Ω	
Accuracy	1								%	
Weight	85								g	TVS: Transient Voltage Suppressor (7.5V) Current output type Secondary is not allowed to open circuit

### Dimensions (in mm ± 0.5) :

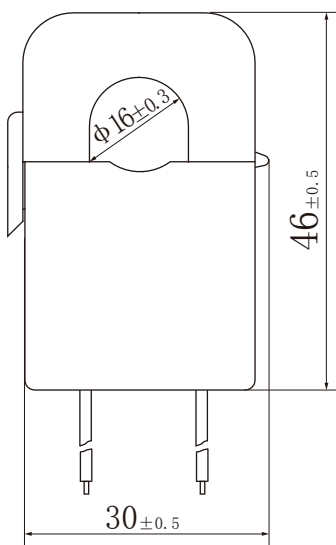

Front view

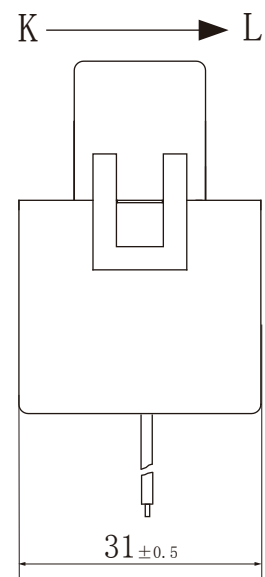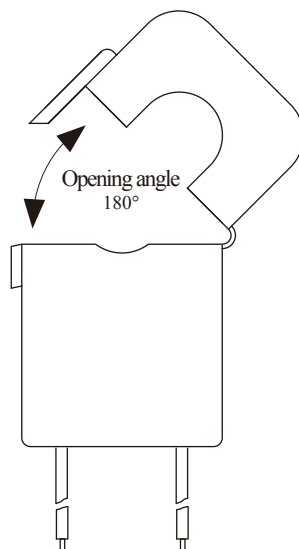

Side view