

SCT036TS (1A output type)



Characteristic:

Safety lock buckle, easy installation, screw terminal output.

Product picture : (the printed words are for reference only, subject to the actual product)

Technical index:


Mounting type: Free hanging (In-Line)
 Material of core: Laminated silicon steel
 Applicable standards: GB20840-2014
 Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
 Frequency range: 50Hz-1KHz
 Dielectric strength: 3.5KV 50Hz 1min




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	100A	200A	300A	400A	500A	600A	
Rated output	1A	1A	1A	1A	1A	1A	
Turns ratio	1:100	1:200	1:300	1:400	1:500	1:600	
Accuracy	0.5%/1%						
Power	5VA						
Weight	310g						

Dimensions (in mm ± 0.5):

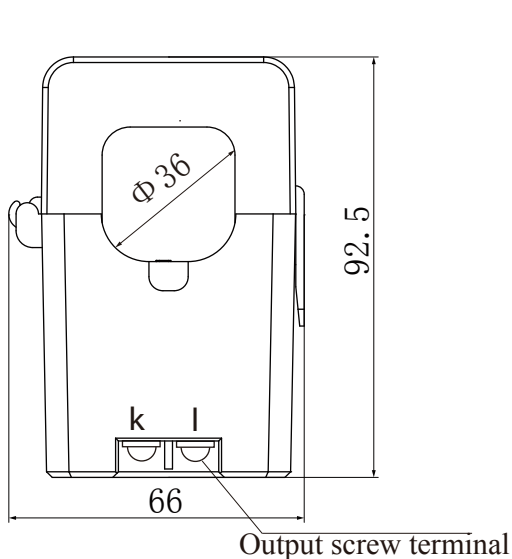

Front view

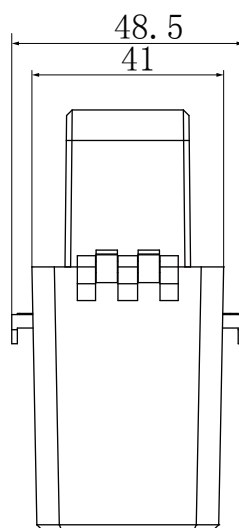

Side view

