

SPECIFICATIONS

I-Purge®X Modular Inflatable System (Sold as a Complete System)

| ITEM NO. | MINIMUM DIAMETER | | MAXIMUM DIAMETER | | STANDARD HARNESS LENGTH | | DESCRIPTION |
|-------------|------------------|--------|------------------|---------|-------------------------|--------|--------------------------------------------------------------------------------------|
| ITEWINO. | ENGLISH | METRIC | ENGLISH | METRIC | ENGLISH | METRIC | DESCRIPTION |
| XABLD 2-3 | 2" | 51 mm | 3" | 76 mm | 11" | 279 mm | 2-3" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 4-6 | 4" | 102 mm | 6" | 152 mm | 11" | 279 mm | 4-6" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 8-12 | 8" | 203 mm | 12" | 305 mm | 11" | 279 mm | 8-12" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 14-18 | 14" | 356 mm | 18" | 457 mm | 16" | 406 mm | 14-18" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 20-26 | 20" | 509 mm | 26" | 660 mm | 18" | 457 mm | 20-26" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 28-36 | 28" | 711 mm | 36" | 914 mm | 20" | 509 mm | 28-36" I-Purge X Expandable Double Purge Bag System with High Heat Harness |
| XABLD 38-48 | 38" | 965 mm | 48" | 1219 mm | 36" | 914 mm | 38-48" I-Purge X Expandable Double Purge Bag System with High Heat Harness |

I-PurgeX Isolator®

| ITEM NO. | DIME | NSIONS | DESCRIPTION | |
|------------|---------|-------------|-----------------------------------------------------------------|--|
| ITENTINO. | ENGLISH | METRIC | | |
| XISO 2-3 | 2-3" | 51-76 mm | 2-3" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 4-6 | 4-6" | 102-152 mm | 4-6" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 8-12 | 8-12" | 203-305 mm | 8-12" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 14-18 | 14-18" | 356-457 mm | 14-18" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 20-26 | 20-26" | 509-660 mm | 20-26" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 28-36 | 28-36" | 711-914 mm | 28-36" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |
| XISO 38-48 | 38-48" | 965-1219 mm | 38-48" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve | |

I-Purge®X Modular System Components (Sold as Separate Parts)

| ITEM NO. MODULE A | ITEM NO. MODULE B | DIME | NSIONS | DESCRIPTION |
|-------------------|-------------------|---------|--------|------------------------------------|
| TIEW NO. MODULE A | TIEM NO. MODULE B | ENGLISH | METRIC | DESCRIPTION |
| XABLD-2 MOD-A | XABLD-2 MOD-B | 2" | 51 mm | 2" I-Purge X Module A or B |
| XABLD-4 MOD-A | XABLD-4 MOD-B | 4" | 102 mm | 4" I-Purge X Module A or B |
| XABLD-8 MOD-A | XABLD-8 MOD-B | 8" | 203 mm | 8" I-Purge X Module A or B |
| XABLD-14 MOD-A | XABLD-14 MOD-B | 14" | 356 mm | 14" I-Purge X Module A or B |
| XABLD-20 MOD-A | XABLD-20 MOD-B | 20" | 509 mm | 20" I-Purge X Module A or B |
| XABLD-28 MOD-A | XABLD-28 MOD-B | 28" | 711 mm | 28" I-Purge X Module A or B |
| XABLD-38 MOD-A | XABLD-38 MOD-B | 38" | 965 mm | 38" I-Purge X Module A or B |

Accessory Components Optional Harness Lengths

| ITEM NO. | DIM | ENSIONS | DESCRIPTION | |
|-----------------|----------------|----------|------------------------------------------------|--|
| ITEM NO. | ENGLISH METRIC | | DESCRIPTION | |
| ABLD-ELH-24 | 24" | 610 mm | 24" (2') Extended Length High Heat Harness | |
| ABLD-ELH-36 | 36" | 914 mm | 36" (3') Extended Length High Heat Harness | |
| ABLD-ELH-48 | 48" | 1219 mm | 48" (4') Extended Length High Heat Harness | |
| ABLD-ELH-72 | 72" | 1828 mm | 72" (6') Extended Length High Heat Harness | |
| ABLD-ELH-CUSTOM | Any Size | Any Size | Custom Lengths Available Upon Request | |
| ABLD-CNADP | NA | NA | 1/4" Female MPT to 1/4" Female BSPP Conversion | |

For additional product information, quotations and ordering, please contact:

Aquasol Corporation

80 Thompson Street N. Tonawanda, NY 14120 USA

Toll Free: 1.800.564.WELD (9353) Phone: 716.564.8888 Fax: 716.564.8889

Email: info@aquasolcorporation.com aquasolwelding.com

Distributed By:







MODULAR INFLATABLE BLADDER SYSTEM

US & FOREIGN PATENTS ISSUED & PENDING CE APPROVED



ALL NEW EXPANDABLE & EXTENDABLE MODULAR SYSTEM

ONE SYSTEM FITS MULTIPLE PIPE SIZES



Different Diameters to Create a Unique Configuration









MODULAR INFLATABLE BLADDER SYSTEM





Quick Connect Interchangeable Fittings

- State-of-the-Art Technology
- · Snap-In Place In Seconds
- Corrosion Resistant





Inflatable Bladders Modules A & B

- One Size Expands and Contracts to Fit Multiple Pipe Sizes
- Spark Resistant Exterior Cover Does Not Melt
- · Heavy-Duty Interior Inflatable Bag



- Internal Hose and Protective External Fiberglass Sleeve Capable of Withstanding Temperatures up to 1200°F (650°C)
- Extended Length Harnesses Available to Accommodate Pre-heating and High Heat Applications
- Flexible Bridge Harness Easily Navigates Through Pipes, Including Elbows & Tees Over 90°
- · Kink Resistant Hose Assures Continuous Gas Supply
- Complete With Luminescent Indicator for Accurate Alignment at Root Gap

Proprietary Relief Valve Technology

- Preset Relief Valve Allows for Precise Flow Rates
- · Decreases The Risk Of Over-Inflation
- · Low Profile Relief Valve Available on 2" and 3" Models



Patent-Pending Inert Gas Diffuser*

- · Disperses Inert Gas in all Directions Within the Weld Zone, Reducing Turbulence
- Improves Weld Quality

*Diffuser not available on 2" and 3" Models




Tri-Flow Inner Tubing System (Blue, Black & Exhaust Hoses)

- Improves Efficiency of Gas Flow In & Out of Purge Area
- · Separate Connections for:
- · Inflation of Bladders, Flooding of Weld Zone with Inert Gas, Exhaust (Connects to Oxygen Monitor for O2 Analysis)
- Expedites Purging Process
- Optimum Seal Strength Achieved

I-PURGE®X MODULAR SYSTEM

EQUIPPED WITH BLADDER EXPANSION TECHNOLOGY

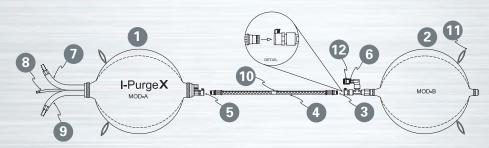

I-Purge®X Modular System Components:

- 1. Module A
- 2. Module B
- 3. Quick Connection to Module B
- 4. Stainless Steel Bridge Harness
- 5. Quick Connection to Module A
- 6. Relief Valve
- 7. Direct Purge (Black) Hose
- 8. Exhaust Monitor Connection
- 9. Inflation & Purge (Blue) Hose
- 10. Luminescent Indicator
- 11. Pull Loops
- 12. Gas Diffuser





I-Purge®X Features:

- Bladder Expansion Technology Enables One Unit to Fit Multiple Pipe Sizes
- · Unique Modular Design for a Customized Solution
- Easy Change and Replacement of Components
- Strong Pull Loops for Insertion and Removal
- Carrying Bag for Protection and Storage
- Manufactured in the USA from the Highest Quality Materials
- · Long Term, Reusable Solution

I-PURGEX ISOLATOR® INFLATABLE PIPE STOPPER & SINGLE PURGE BLADDER

- · Accommodates a wide range of applications, including:
- » pipe system servicing, cleaning, inspection and sealing
- · Industries:
- » Oil and Petrochemical
- » Water, Gas and Drainage
- » Construction



EASY TO USE. REQUIRES NO TOOLS. **EXPANDABLE**, **EXTENDABLE** & **EXTRAORDINARY!**