


**Geberit remote flush actuation type 70 for dual flush, for Omega concealed cistern**

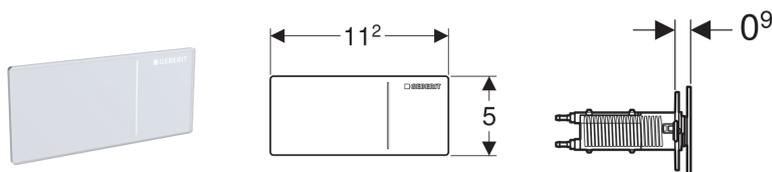

**Application purposes**

- For solid and drywall construction
- For covering thicknesses of 5–50 mm in drywall construction
- For wall thicknesses of  $\geq 75$  mm in solid construction
- For tiled floor constructions of 5–40 mm
- For pneumatic remote flush actuation of Geberit concealed cisterns
- For Geberit Omega concealed cisterns 12 cm
- For flush actuation with high actuating convenience
- Not suitable for public and semipublic areas

**Characteristics**

- Low-noise lifting mechanism
- Hydraulic servo lifter for minimum actuation forces

- Flush actuation pneumatic
- Can be combined with Geberit cover plates Omega

**Technical data**

Flow pressure	1-3 bar
Actuation force	< 10 N

**Scope of delivery**

- Hydraulic servo lifter
- Water supply connection set
- Pneumatic hose, length 2 m
- Concealed outlet with protection cover
- Conduit pipe, length 1.7 m
- Assembly parts
- Fastening material

Art. no.	Surface / colour	Material designation
115.090.SI.1	white	Glass
115.090.SJ.1	black	Glass
115.090.SQ.1	umber	Glass
115.090.FW.1	brushed, easy-to-clean coated	Stainless steel



- Minimum 1 bar mains constant flow pressure

Created with Geberit online product catalogue - 21/06/2018