


Geberit flush plate Sigma70 for dual flush, for Sigma concealed cistern 8 cm

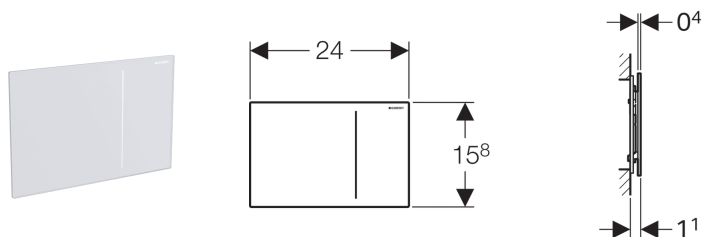

Application purposes

- For flush actuation with Geberit Sigma concealed cisterns 8 cm
- For flush actuation with high actuating convenience
- Not suitable for public and semipublic areas

Characteristics

- Front actuation
- Low-noise lifting mechanism
- Hydraulic servo lifter for minimum actuation forces
- Flush actuation pneumatic
- Can be installed without tools

Technical data

Flow pressure	1-3 bar
Actuation force	< 10 N

Scope of delivery

- Hydraulic servo lifter
- Water supply connection set
- Protection plate
- Mounting frame
- 2 distance bolts
- Assembly parts

Art. no.	Surface / colour	Material designation
115.627.SI.1	white	Glass
115.627.SJ.1	black	Glass
115.627.SQ.1	umber	Glass
115.627.FW.1	brushed, easy-to-clean coated	Stainless steel
115.627.00.1	customised	-



- Minimum 1 bar mains constant flow pressure
- Art. no. 115.627.00.1 - for custom-made flush plate i.e. tile to be sourced by customer, minimum dimensions 240 x 158 mm, maximum weight 1.5 kg

Created with Geberit online product catalogue - 21/06/2018