


Geberit WC flush control with electronic flush actuation, battery operation, dual flush, flush plate Sigma10, automatic/touchless, screwable

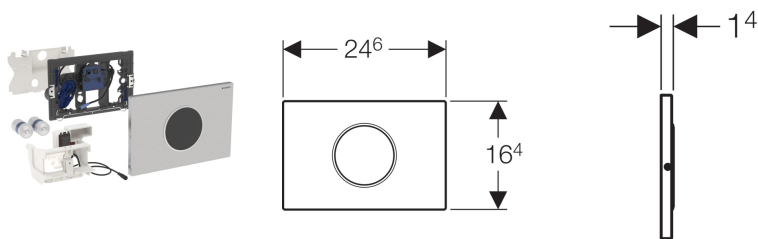

Application purposes

- For public and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Geberit Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Not suitable for less-abled installation

Characteristics

- Touchless manual flush actuation
- Automatic flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Screwable flush plate
- Battery-operated
- Batteries in closed battery compartment in the flushing cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- Reliable IR distance detection
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Compatible with Geberit Service Handy

- Functions can be set and queried with the Geberit Service Handy
- Flush actuation can be deactivated via Geberit Clean Handy
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Vandal-resistant
- Easy maintenance and cleaning

Technical data

Battery type	LR20
Operating voltage	3 V DC
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	24 h
Detection time, adjustment range	1-60 s
Detection time, factory setting	7 s

Scope of delivery

- Flush plate Sigma10
- Mounting frame with infrared control and battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- 2 alkaline manganese batteries LR20, each 1.5 V
- Actuator rod
- Fastening material

Art. no.	Surface / colour	Material designation
115.909.SN.1	Plate: brushed Design ring: polished	Stainless steel

Accessories

- Geberit Service Handy
- Geberit Clean Handy