


Plan

14943000630 Shower curtain PLAN uni

PRODUCT



DRAWING

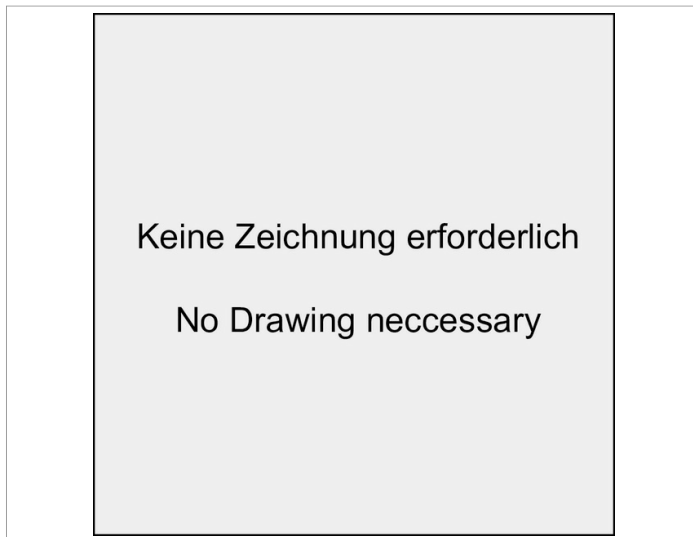

PRODUCT ATTRIBUTES

100% trevira, 80g/m², vertical seams reinforced for stainless steel eyelets
Distance between eyelets appr. 200 mm
Weighted seam 50 g per meter
impregnated, fungicide, antibacterial, antistatic, washable at 30°, shrinkage appr. 1-2% tested acc. to OEKO-Tex Standard 100 complete with white curtain rings

SURFACE

anthracite/16 eyelets

DIMENSION

1800x3000 mm

SPECIFICATIONS

KEUCO shower curtain PLAN uni, 14943000130, 118-1/8" x 70-14/16, anthracite, 16 eyelets
100% trevira, 0.0165 lb/ft², vertical seams reinforced for stainless steel eyelets, distance between eyelets approx. 7-7/8", weighted seam 1.76 oz per 39-3/8" impregnated, fungizid, antibacterial, anitstatic, washable at 30° C / 86° F, shrinckage appr. 1-2%, tested acc, to OEKO-Tex Standard 100 complete with curtain rings, white

Information concerning the measurements:
All dimensions refer to the actual finish size,
In order for the shower curtain not to touch the bottom of the bath tub or the floor we recommend the following:
Distance between the floor and the bottom edge of the curtain appr, 1-3/16",
Dinstance between the centre of the curtain pole and the top edge of the curtain
appr, 1-9/16",
Please allow appr, 1,3 to 1,5 times curtain pole length when calculating the required width of the curtain,