


Geberit shower floor drain, for screed height at inlet 90–220 mm

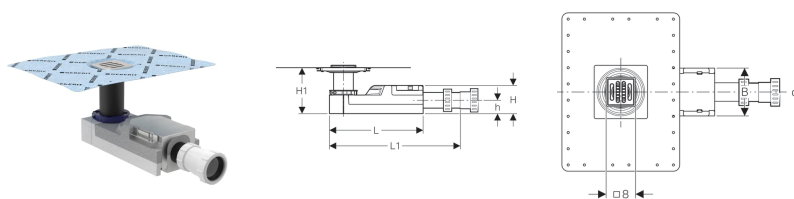

Application purposes

- For installation inside buildings
- For drainage of floor-even showers
- For composite seals
- For screed height ≥ 90 mm at inlet

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Tile structure floor 2–40 mm
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Grating made of stainless steel
- Grating can be aligned in height, inclination and offset
- Base unit made of EPS, for sound decoupling and receiving the trap

Technical data

Discharge rate	0.8 l/s
Depth of water seal	50 mm

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Comb insert
- Grating frame with compensation ring
- Grating
- Trap made of PE-HD
- Adaptor $\varnothing 50$ mm to G 2" ($\varnothing 55$ mm)
- Fastening material
- Distance plate, thickness 2 cm

Art. no.	DN	d, \varnothing	B	H	H1	h	L	L1
154.054.00.1	50	55 mm	13 cm	9 cm	9-22 cm	4.2 cm	30 cm	35.8 cm

Accessories

- Geberit grating, screw-locked, 8 x 8 cm
- Geberit design grating "Circle", 8 x 8 cm
- Geberit design grating "Square", 8 x 8 cm



- Consider screed height of the base unit with tile sizes < 5 cm. Have product material and thickness of the screed defined by tiler.
- Natural stone tiles in the shower area may discolour

Created with Geberit online product catalogue - 21/06/2018