


**Installation set for Geberit shower channels of the CleanLine series, for screed height at inlet 90–220 mm**

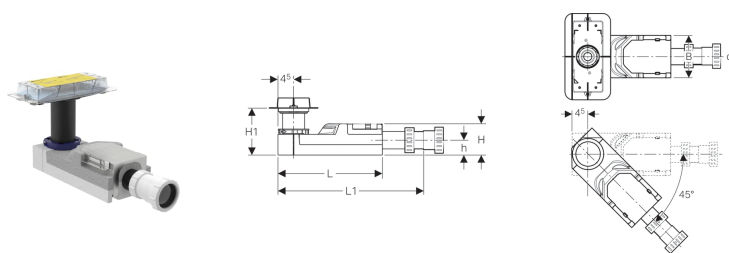

**Application purposes**

- For installation inside buildings
- For drainage of Geberit shower channels of the CleanLine series
- For composite seals
- For screed height  $\geq 90$  mm at inlet

**Characteristics**

- Quality-monitored in accordance with EN 1253-3
- Premounted sealing fleece
- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Base unit made of EPS, for sound decoupling and receiving the trap

**Technical data**

Discharge rate	0.8 l/s
Depth of water seal	50 mm

**Scope of delivery**

- Protection box cover with reference line
- Thin bed bonding flange
- Trap made of PE-HD
- Adaptor  $\varnothing 50$  mm to G 2" ( $\varnothing 55$  mm)
- Fastening material
- Distance plate, thickness 2 cm

**To order additionally**

- Shower channel of the CleanLine series

Art. no.	DN	d, $\varnothing$	B	H	H1	h	L	L1
154.154.00.1	50	55 mm	13 cm	9 cm	9-22 cm	4.2 cm	30 cm	35.8 cm

**Accessories**

- Geberit shower channel CleanLine20
- Geberit shower channel CleanLine60
- Geberit shower channel CleanLine60 for thin floorings
- Geberit shower channel CleanLine, tile-bearing



- Consider screed height of the base unit with tile sizes  $< 5$  cm. Have product material and thickness of the screed defined by tiler.

Created with Geberit online product catalogue - 21/06/2018