


Geberit shower surface Setaplano

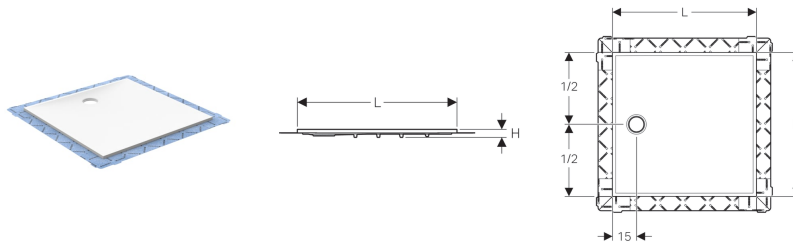

Application purposes

- For installation inside buildings
- For use as floor-even shower surface
- For draining off waste water from a single shower head
- For floor constructions up to top edge of the finished floor 6–25 cm
- For raised installation up to 2 cm above finished floor
- For composite seals

Characteristics

- Slip-proof for wet barefoot areas class B (DIN 51097)
- Increased sound insulation requirements fulfilled in combination with Geberit installation frame
- Premounted sealing fleece

- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Can bear loads of up to 300 kg
- Easy cleaning

Technical data

Material | Varicor®

Scope of delivery

- Protective foil

To order additionally

- Installation frame for Geberit shower surfaces made of solid surface material
- Shower drain for Geberit shower surfaces made of solid surface material

Art. no.	Surface / colour	B	H	L	
154.260.11.1	white alpine	80 cm	4.5 cm	80 cm	NEW
154.262.11.1	white alpine	80 cm	4.5 cm	100 cm	
154.264.11.1	white alpine	80 cm	4.5 cm	120 cm	
154.266.11.1	white alpine	80 cm	4.5 cm	140 cm	
154.267.11.1	white alpine	80 cm	4.5 cm	150 cm	NEW
154.270.11.1	white alpine	90 cm	4.5 cm	90 cm	
154.271.11.1	white alpine	90 cm	4.5 cm	100 cm	
154.273.11.1	white alpine	90 cm	4.5 cm	120 cm	
154.275.11.1	white alpine	90 cm	4.5 cm	140 cm	
154.280.11.1	white alpine	100 cm	4.5 cm	100 cm	
154.282.11.1	white alpine	100 cm	4.5 cm	120 cm	
154.284.11.1	white alpine	100 cm	4.5 cm	140 cm	



- The installation manuals for the Geberit shower surface Setaplano and the Geberit installation frame for shower surfaces Setaplano are enclosed with the respective shower drains.

- To achieve depth of 6cm the cross-floor installation set must be used to reach a trap below floor level