

ShowerSelect S

Thermostatic mixer for concealed installation for 2 outlets

Surfaces: **chrome** Art. no. : **15743000**



Description

product features

- designed to run 2 outlets
- multiple outlets can be run simultaneously
- Select push button on / off control for 2 outlets
- wall-mounted
- flow rate upper outlet 25 l/min at 3 bar
- flow rate lower outlet 23 l/min at 3 bar
- thermostat cartridge, start/ stop cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Noise class: I
- Thermostat is delivered with buttons hand shower and Rain large
- if running with a pump, please specify a universal (negative head) pump
- buttons provided: hand shower and overhead shower
- different symbol buttons can be ordered separately
- WRAS 1503309
- Kiwa UK 1405706

Article Details

Price excl. VAT

£ 583.33

Technology



Certificates




kiwa

Product image



Scale drawing

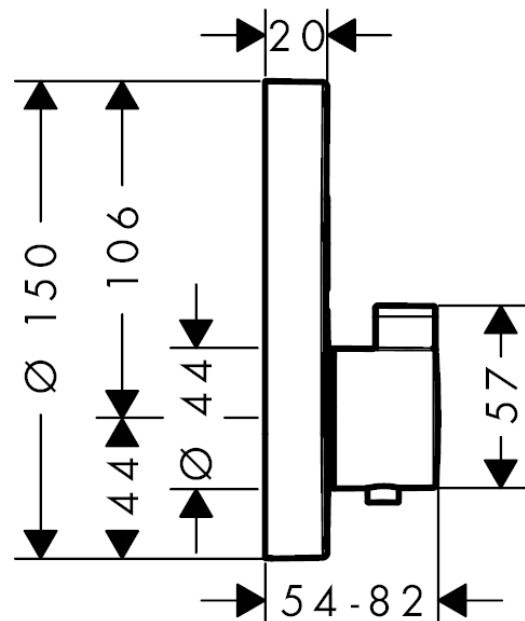

ShowerSelect S
Thermostatic mixer for concealed installation for 2 outlets
 Surfaces: **chrome** Art. no. : **15743000**



Flowchart

