

ShowerSelect
Thermostatic mixer HighFlow for concealed installation
 Surfaces: **chrome** Art. no. : **15760000**



Description

product features

- wall-mounted
- flow rate upper outlet 42 l/min at 3 bar
- flow rate lower outlet 42 l/min at 3 bar
- thermostat cartridge
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Noise class: II
- dirt filter included
- requires separate shut-off valve
- operating pressure: min 1 bar / max 10 bar
- winner of the iF product design award 2014
- WRAS 1801028
- WRAS 1801028

Article Details

Price excl. VAT

£ 387.50


Certificates



Product image



Scale drawing

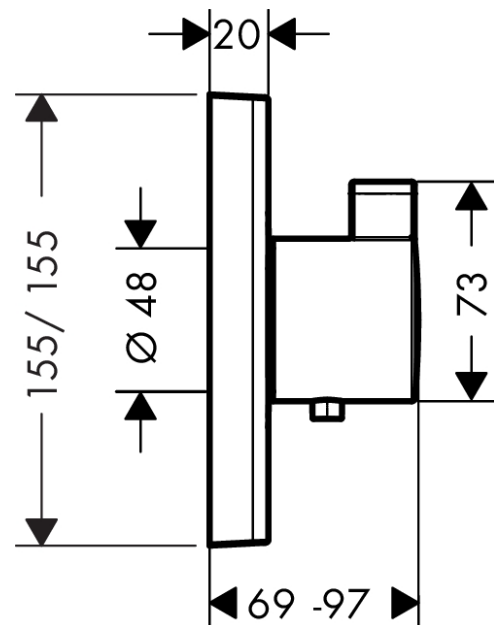

ShowerSelect
Thermostatic mixer HighFlow for concealed installation
 Surfaces: **chrome** Art. no. : **15760000**



Flowchart

