

ShowerSelect

Thermostatic mixer HighFlow for concealed installation for multiple outlets

Surfaces: **chrome** Art. no. : **15761000**



Description

product features

- designed to run multiple outlets
- Select push-button on / off control for 1 outlet
- wall-mounted
- flow rate hand shower connection 34 l/min at 3 bar
- flow rate upper outlet 59 l/min at 3 bar
- thermostat cartridge, start/ stop cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Noise class: I
- dirt filter included
- Thermostat is delivered with button hand shower
- if running with a pump, please specify a universal (negative head) pump
- winner of the iF product design award 2014
- WRAS 1503309
- Kiwa UK 1405706

Article Details

Price excl. VAT

£ 529.17

Technology



Certificates




kiwa

Product image



Scale drawing

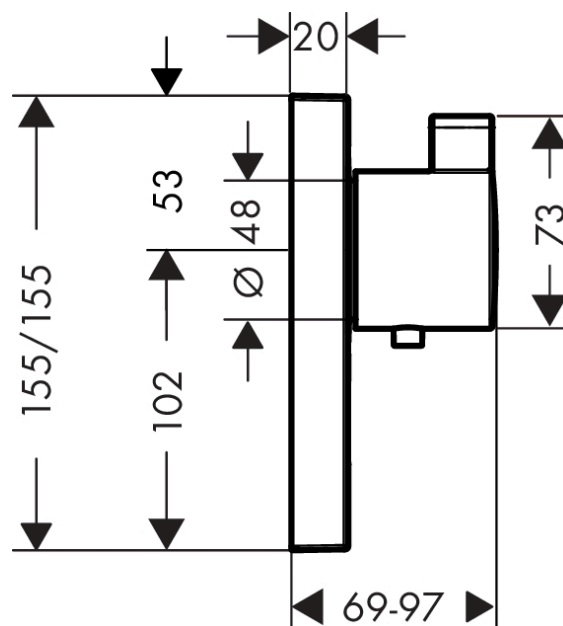

ShowerSelect

Thermostatic mixer HighFlow for concealed installation for multiple outlets

Surfaces: **chrome** Art. no. : **15761000**



Flowchart

