


Geberit fill valve type 380, lateral water supply connection, 3/8", nipple made of brass

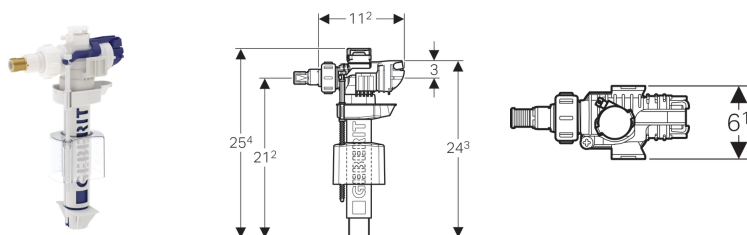

Application purposes

- For installation in exposed cisterns with lateral water supply connection
- For grey water (rainwater), if a filter system is used
- For ceramic cisterns
- For potable water

Characteristics

- Adjustable filling height
- Threaded nipple made of brass
- Water supply connection on the left/right
- Low-noise in accordance with tap group I (DIN 4109)
- With check valve

Technical data

Flow pressure	0.1-10 bar
Line noise at 3 bar	12 dB(A)
Line noise at 5 bar	18 dB(A)
Maximum storage temperature	40 °C
Maximum operating temperature, water	25 °C
Calculated flow rate	0.11 l/s
Minimum flow pressure for calculated flow rate	0.5 bar

Scope of delivery

- Adaptor for nipple, for fill valve type 350
- Cone screw fitting

Art. no.

242.983.00.1



- The filling height can be set by turning the spindle
- The valve opens after the water level drops by 20 mm
- Incorporates backflow prevention device
- Strainer situated inside valve body
- Replacement for 240.700.00.1

Created with Geberit online product catalogue - 21/06/2018