


Geberit Kombifix frame for shower, with wall drain, for screed height at inlet 90–200 mm

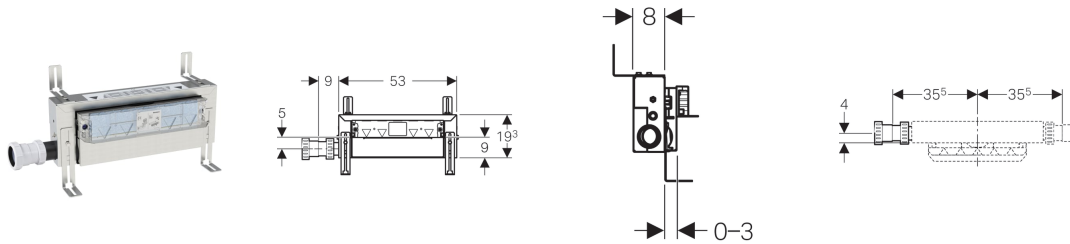

Application purposes

- For domestic bathrooms
- For drainage of floor-even showers
- For solid walls, drywalls, or prewalls in solid and drywall construction
- For composite seals
- For screed height ≥ 90 mm at inlet

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Plaster thickness 5–30 mm
- Tile structure floor 2–26 mm
- Tile structure wall 2–35 mm
- Height-adjustable element
- Adjustable sealing level for tension-free sealing connection
- Drainage connection on the left/right
- Premounted sealing fleece

- Sealing fleece, 10 cm circumferential, for connecting sealing systems
- Adjustable inlet height of trap

Technical data

Discharge rate	0.8 l/s
Depth of water seal	50 mm

Scope of delivery

- Straight connector made of PE-HD, \varnothing 50 mm
- Adaptor \varnothing 50 mm to G 2" (\varnothing 55 mm)
- Protection box cover with integrated outlet sheet
- Fastening material

To order additionally

- Ready-to-fit set

Art. no.	d, \varnothing
457.538.00.1	55 mm

Accessories

- Ready-to-fit set for Geberit wall drain, made of stainless steel
- Ready-to-fit set for Geberit wall drain, made of plastic
- Collector profile for Geberit wall drain for shower



- Natural stone tiles in the shower area may discolour