

Logis
Single lever manual bath mixer for exposed installation
 Surfaces: **chrome** Art. no. : **71400000**



Description

product features

- spout 194 mm long
- designed to run 2 outlets
- Connection type: S connections
- Centre distance: 150 mm ± 12 mm
- Spray type mixer: normal spray
- Flow rate for bath spout (at 3 bar): 20 l/min
- Flow rate of hand shower (at 3 bar): 17 l/min
- ceramic cartridge
- Maximum temperature can be adjusted on installation
- automatically reverts from shower to bath spout when turned off
- Non-return valve
- with silencer
- exposed design allows easy installation, all working parts are outside of the wall
- Noise class: I
- operating pressure: min. 1 bar / max. 5 bar
- non-thermostatic
- WRAS 1411012

Article Details

Price excl. VAT £ 129.17

Technology



Certificates




kiwa

Product image



Scale drawing

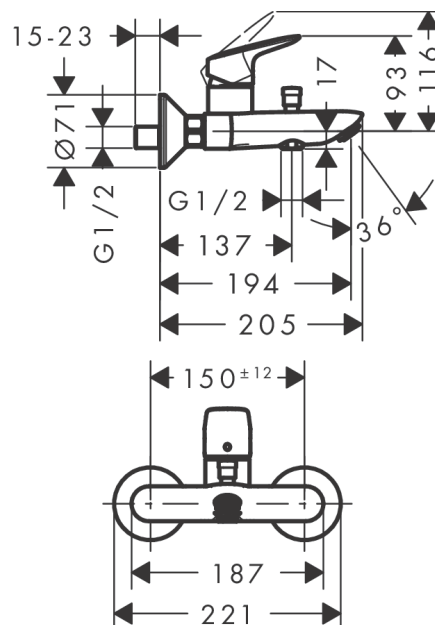

Logis
Single lever manual bath mixer for exposed installation
 Surfaces: **chrome** Art. no. : **71400000**



Flowchart

