

Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Battery

ILLUSTRATED

A4848 Sensorflow 21 compact tubular panel mounted 230mm projection spout, anti splash or anti vandal laminar flow outlet, integral sensor, copper tube inlets, battery

ILLUSTRATED PRODUCT DETAILS

Weights

A4848 2.20 KG

Finishes

A4848  Chrome (AA)

Materials

A4848 Chrome Plated Brass

Flow rates

A4848 4.7 Litres per minute @ 3 bar pressure

FINISH OPTIONS




Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of Chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds.

Stand alone battery powered unit.

Flow rates, regulated to 5 Litres per minute or optional flow straightener outlet 2 Litres per minute @ 0.1 bar

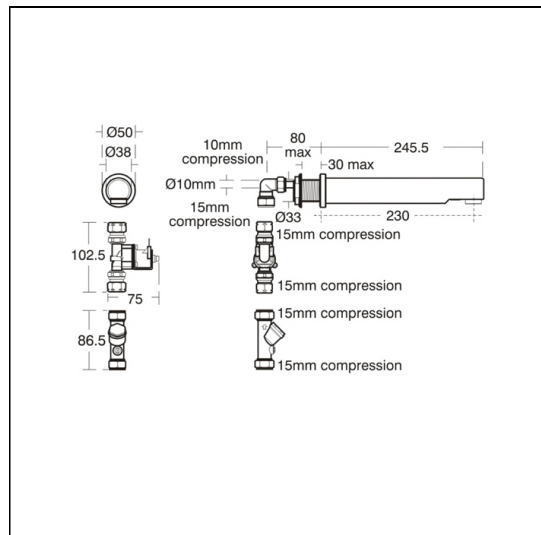

ACCREDITATIONS

A4848(AA)



FEATURES

