
# Geberit WC flush control with electronic flush actuation, mains operation, dual flush, flush plate Sigma10, automatic/touchless

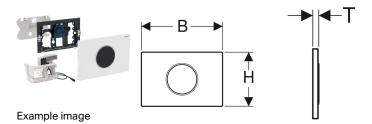

## **Application purposes**

- For private and semipublic areas
- · For releasing a dual flush
- · For solid and drywall construction
- For touchless flush actuation of Geberit Sigma concealed cisterns 12
  cm
- · Not suitable for use with Geberit inserts for in-cistern block

#### Characteristics

- · Touchless manual flush actuation
- · Automatic flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- · Power supply via power supply unit
- · External power supply unit
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- · Reliable IR distance detection
- · Interval flush preset
- Adjustable interval flush

- · Preflush can be set
- · Minimum detection time can be set
- · Compatible with Geberit Service Handy
- Functions can be set and queried with the Geberit Service Handy
- Flush actuation can be deactivated via Geberit Clean Handy
- Low-noise lifting mechanism
- · Electrical lifting device, self-calibrating
- · Easy maintenance and cleaning

#### **Technical data**

| Protection degree                     | IP45        |  |
|---------------------------------------|-------------|--|
| Nominal voltage                       | 85-240 V AC |  |
| Mains frequency                       | 50-60 Hz    |  |
| Operating voltage                     | 4.1 V DC    |  |
| Interval flush, adjustment range      | 1-168 h     |  |
| Interval flush, factory setting       | 24 h        |  |
| Interval flush time, adjustment range | 1-200 s     |  |
| Interval flush time, factory setting  | 1 s         |  |
| Detection time, adjustment range      | 1-60 s      |  |
| Detection time, factory setting       | 7 s         |  |

## Scope of delivery

- Flush plate Sigma10
- Mounting frame with infrared control, premounted
- · Protection plate

- Support block with servomotor and lifting device, premounted
- Actuator rod
- · Fastening material

# To order additionally

 Geberit installation set for WC flush controls with electronic flush actuation

| Art. no.     | Colour / surface  | Material designation | В       | Н       | Т      |
|--------------|---|----------------------|---------|---------|--------|
| 115.907.KH.1 | Plate: gloss chrome-plated<br>Design ring: matt chrome-plated | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |
| 115.907.KJ.1 | Plate: white<br>Design ring: gloss chrome-plated              | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |
| 115.907.KK.1 | Plate: white<br>Design ring: gold-plated                      | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |
| 115.907.KL.1 | Plate: white<br>Design ring: matt chrome-plated               | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |
| 115.907.KM.1 | Plate: black<br>Design ring: gloss chrome-plated              | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |
| 115.907.KN.1 | Plate: matt chrome-plated<br>Design ring: gloss chrome-plated | Plastic              | 24.6 cm | 16.4 cm | 1.4 cm |

| Art. no. | C | Colour / surface                        | Material designation | В       | Н       | Т      |
|----------|---|---|----------------------|---------|---------|--------|
| 115.907. |   | Plate: brushed<br>Design ring: polished | Stainless steel      | 24.6 cm | 16.4 cm | 1.4 cm |

# Accessories

- Geberit Service HandyGeberit Clean Handy



Requires transformer 115.861.00.1