


**Sales Code:** HL502

**Description:** Thermostatic Heating Element (600W)

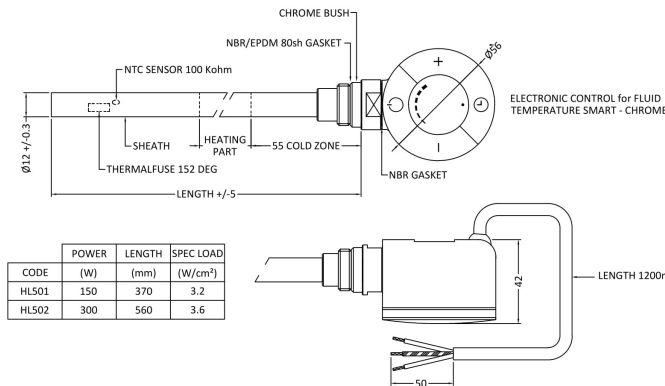

| CODE  | POWER | LENGTH | SPEC LOAD            |
|-------|-------|--------|----------------------|
|       | (W)   | (mm)   | (W/cm <sup>2</sup> ) |
| HL501 | 150   | 370    | 3.2                  |
| HL502 | 300   | 560    | 3.6                  |

**Product Dimensions**

|                   |     |
|-------------------|-----|
| Height (mm):      | 45  |
| Width (mm):       | 56  |
| Depth (mm):       | 630 |
| Length (mm):      |     |
| Nett Weight (kg): | 0.6 |

**Packaging Dimensions**

|                    |     |
|--------------------|-----|
| Height (mm):       | 65  |
| Width (mm):        | 105 |
| Length (mm):       | 650 |
| Gross Weight (kg): | 0.6 |

**Packaging Data**

|               |                |
|---------------|----------------|
| Box Colour:   | Cardboard Tube |
| Box Qty:      | 1              |
| Label Size:   | 100 x 50       |
| Label Colour: | White Label    |
| Label Qty:    | 1              |

**Outer Box Dimensions (If Applicable)**

|                    |               |
|--------------------|---------------|
| Height (mm):       |               |
| Width (mm):        |               |
| Length (mm):       |               |
| Gross Weight (kg): |               |
| Barcode:           | 5055275894026 |

**Product Details**

|                      |                |       |       |
|----------------------|----------------|-------|-------|
| Country of Origin:   | United Kingdom |       |       |
| Fitting Instruction: | Yes            |       |       |
| Certification:       | CE: Yes        | RoHS: | WEEE: |
| Colour/Finish:       |                |       |       |
| RAL No:              |                |       |       |
| Product Material:    |                |       |       |

|                                     |        |        |        |
|-------------------------------------|--------|--------|--------|
| Heat Element Wattage:               | 600 W  |        |        |
| Heating Element Wattage Compatible: |        |        |        |
| BTU Outputs:                        | 30°C / | 50°C / | 60°C / |
| Thermal Outputs: (Watts)            | 30°C / | 50°C / | 60°C / |

Pipe Centres - If Vertical:  
Pipe Centres - If Horizontal:

Max Projection:  
Tube Diameter:  
Packaging Volume (L):  
Wall to Centre of Tappings:  
Floor to Centre of Tappings:  
Dual Fuel:  
IP Rating: