# Contour 21 Washbasin 60cm No Taphole No Chainstay Hole or Overflow -General Use

or

# **ILLUSTRATED**

S2155	(LB H L) Contour 21 back outlet washbasin, 60cm, no tapholes, no overflow, no chainstay hole
S8750	Waste 1¼" outlet adaptor for all Contour back outlet washbasins
S8920	(TRR1/P) Trap 1¼" plastic resealing bottle, 75mm seal, multi-purpose outlet
S9112	Concealed hangers pressed Steel, toggle bolts and clips for Contour washbasins
ΟΡΤΙΟΙ	NS

### UP HUNS

S8746	Plastic strainer for back outlet washbasins
A4181	Sensorflow 21 tubular panel mounted 150mm projection spout anti splash or aerated outlet remote panel sensor, copper tube inlets, link
A4180	Sensorflow 21 tubular panel mounted 150mm projection spout anti splash or aerated outlet remote panel sensor, copper tube inlets, mains
S7422	Contour 21 washbasin mixer wall mounted single control concealed, ceramic disc operation, 150mm projection spout with alternative aerator or flow straightener outlet, ridgid copper inlet tails integral combined filter and regulating valves
A4126	Sensorflow 21 tubular panel mounted 150mm projection spout anti splash or aerated outlet remote panel sensor, copper tube inlets, battery

A5900 TMV Thermostatic mixing valve 15mm

## **ILLUSTRATED PRODUCT DETAILS**




#### Standards

Vitreous china to BS 3402

#### **Special Notes**


Suggested rim heights; 780-800 for ambulant users 680-700 for wheelchair users. Washbasin wall mounted using S9112 hangers or panel mounted using S9112 hangers, toggle bolts & clips. Toggle bolts and outlet adaptor suitable for maximum panel thickness of 18mm.

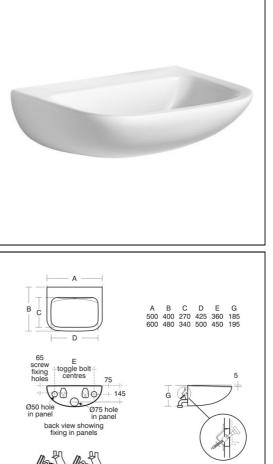





# ACCREDITATIONS



#### E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

Contour 21 Washbasin 60cm No Taphole No Chainstay Hole or Overflow - General Use





E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

