

Concept Bath Filler 2 Hole Dual Control

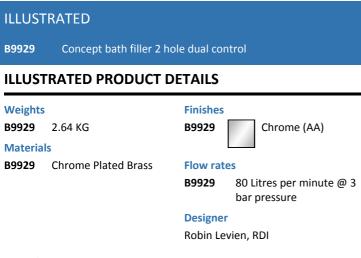

Special Notes

Inlets screwed 3/4in BSP male, coned for 22mm copper. When installed in commercial applications A5901AA a 22mm thermostatic blending valve must be used. Unregulated flow rate 14.5 litres per minute at 0.1 bar.

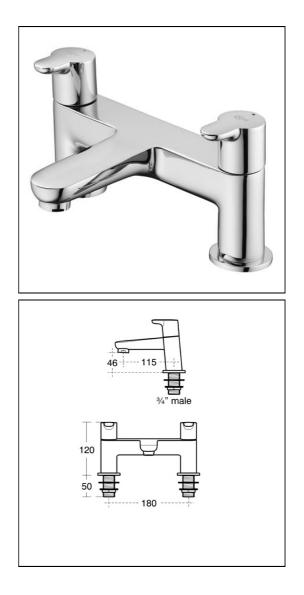

E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

