




Technical Data

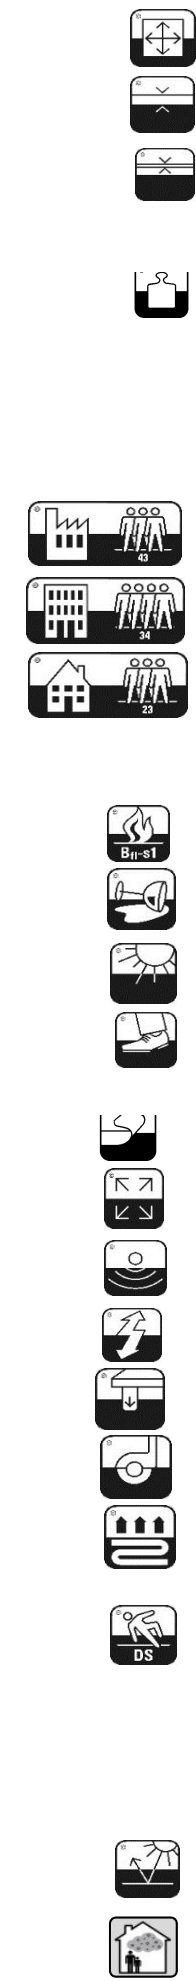

	Standard	Result
Size	EN ISO 24342	See separate table
Thickness	EN ISO 24346	3.0 mm
Wear layer	EN ISO 24340	0.7 mm
Surface treatment		K-Guard+ PU coating
Mass	EN ISO 23997	5020 g/m ²
Guarantee	Light industrial Commercial Domestic	20 years* 20 years* Lifetime guarantee*
Bevelled edge		Yes
Standards	EN 649/ ISO 10582	Pass
Classification	EN 685/ EN ISO 10874- Light industrial EN 685/EN ISO 10874- Commercial EN 685/EN ISO 10874- Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN 423	Class 0
Light fastness	EN ISO 105-B02	≥6
Abrasion resistance	EN 649	Group T
	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434/ EN ISO 23999	Pass
Acoustic Impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433/EN ISO 24343-1	Pass ≤ 0.1mm
Castor chair continuous use	EN 425/ ISO 4918	Pass
Thermal resistance	ISO 8302	0.0147 m ² K/W Suitable for underfloor heating. Max 27°C
**Slip resistance	BS 7976 DIN 51130 DIN 51097 EN 13893	See separate table R10 See separate table DS
Light reflectance value (LRV)	BS 8493:2008+A1:2010	See separate table
VOC emission	French VOC regulation (ISO 16000)	A+
Adhesive	Karndean Universal Acrylic Epoxy High Temperature Pressure sensitive	Yes Yes Yes Yes Yes
Recycling		Suitable

*Subject to terms. Please see our website.

**Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained

Product	Size (mm)	Slip Resistance			LRV
		BS 7976 (dry)	BS 7976 (wet)	DIN 51097	
CC06	406 X 406	59	32	C	14
CER11	304 X 457	65	40	C	11
CER12	304 X 457	65	40	C	9
CER13	304 X 457	65	40	C	9
CER14	304 X 457	65	40	C	9
CER15	304 X 457	65	40	C	35
CER16	304 X 457	65	40	C	21
CER17	304 X 457	65	40	C	21
CER18	304 X 457	65	40	C	53
CER19	304 X 457	65	40	C	19
CER20	304 X 457	65	40	C	31
CER21	304 X 457	65	40	C	12
CK24	406 X 406	60	31	C	33
CK25	406 X 406	60	31	C	8
LST02	406 X 406	65	40	C	53
LST03	406 X 406	65	40	C	49
LST04	406 X 406	65	40	C	40
LST05	406 X 406	65	40	C	26
RP100	915 X 76	65	36	C	17
RP101	915 X 76	65	36	C	12
RP102	915 X 76	65	36	C	28
RP103	915 X 76	65	36	C	26
RP104	915 X 76	65	36	C	13
RP105	915 X 76	65	36	C	9
RP11	915 X 76	64	30	C	37
RP41	915 X 76	64	30	C	8
RP51	915 X 76	65	36	C	25
RP67	915 X 76	65	36	C	10
RP73	915 X 76	65	36	C	20
RP75	915 X 76	65	36	C	22
RP90	915 X 76	65	36	C	25
RP91	915 X 76	65	36	C	17
RP94	915 X 76	65	36	C	10
RP95	915 X 76	65	36	C	12
RP96	915 X 76	65	36	C	22
RP97	915 X 76	65	36	C	19
RP98	915 X 76	65	36	C	25
RP99	915 X 76	65	36	C	13

For more information:
 Call: 01386 820104 For ROI call: 01 6569887
 Email: commercial@karndean.co.uk
 Visit: www.karndean.com

Manufactured to ISO9001

