

20 609 SD0 GROHE ATRIO 3-HOLE DECK-MOUNT BASIN MIXER





PRODUCT DESCRIPTION


- open spout for pure laminar water flow
- red and blue markings on handles for hot and cold water
- valves hot/cold with ceramic headparts
- pressure-proof, flexible connection hoses between spout and side valves

technical data

- flow pressure min 0.5 bar
- **recommended pressure 1.0 - 5.0 bar**
- if static pressure is more than 5 bar fit pressure reducer
- avoid major pressure differences between cold and hot water supply
- flow rate at 3 bar flow pressure: approx. 5 l/min
- max. temperature hot water inlet: 80°C
- recommended temperature hot water inlet (energy saving): 60°C

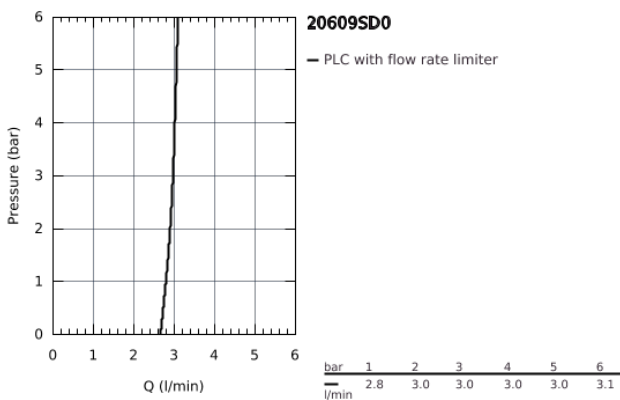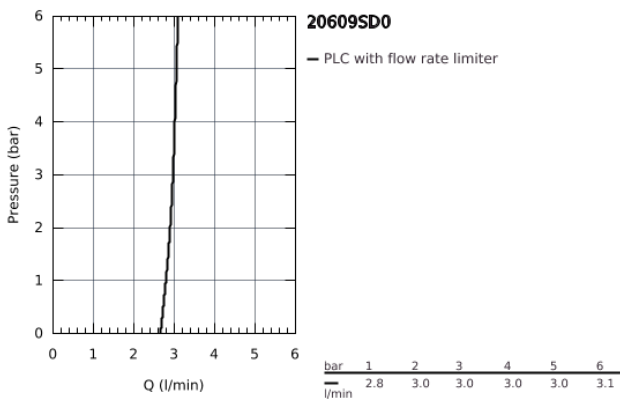

20 609 SD0 GROHE ATRIO 3-HOLE DECK-MOUNT BASIN MIXER

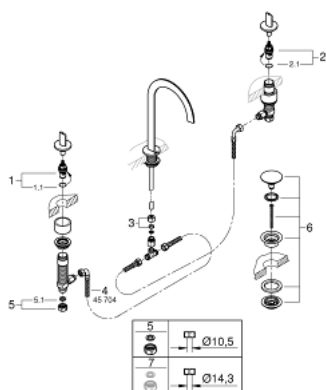

SPARE PARTS

- 1: Ceramic headpart, 1/2" (Order-nr. 45882000)
- 1.1: O-Ring Ø18,2 x Ø1,7 (Order-nr. 0392400M)
- 2: Ceramic headpart, 1/2" (Order-nr. 45883000)
- 2.1: O-Ring Ø18,2 x Ø1,7 (Order-nr. 0392400M)
- 3: Compression union 3/8" (Order-nr. 12914000)
- 4: Flexible connection hose (Order-nr. 45704000)
- 5: Coupling nut 1/2" x 10.5 mm (Order-nr. 1290100M)
- 5.1: Fibre seal dia. Ø 18,5 x Ø 12 x 2 (Order-nr. 0138900M)
- 6: Waste set with push-open plug (Order-nr. 65807000)
- 7: Coupling nut 1/2" x 14.5 mm (Order-nr. 1290200M)*

* Optional accessories