


29 120 AL0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES AND INTEGRATED SHOWER HOLDER

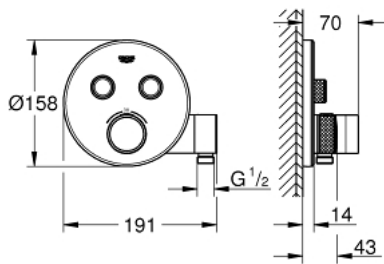

PRODUCT DESCRIPTION

- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- metal wall escutcheon with **GROHE FastFixation** (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- **GROHE StarLight** finish
-
- **GROHE SmartControl** push for ON-OFF, turn for volume adjustment from EcoJoy to full flow
- exchangeable symbols
- **GROHE TurboStat** compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 38°C
- (calibration required)
- **GROHE SafeStop Plus** optional temperature limiter at 43°C or 46°C included
- built-in non return valve and dirt strainers
- multiple outlets can be run simultaneously
- integrated shower union with shower outlet ½"
- **without roughing-in-set**
- flow performance:
 - outlet B = 24 l/min
 - hand shower = 12 l/min
 - outlet B + hand shower = 27 l/min