



## 29 123 DL0 THERMOSTAT FOR CONCEALED INSTALLATION WITH ONE VALVE

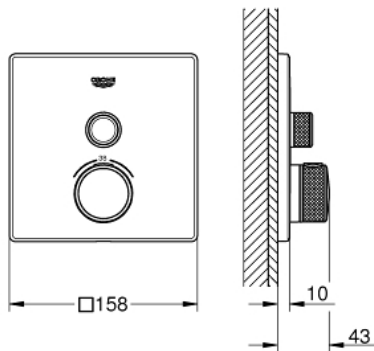

### PRODUCT DESCRIPTION

- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- metal wall escutcheon with **GROHE FastFixation** (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- **GROHE StarLight** finish
- 
- **GROHE SmartControl** push for ON-OFF, turn for volume adjustment from EcoJoy to full flow
- exchangeable symbols
- **GROHE TurboStat** compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 38°C  
( calibration required )
- **GROHE SafeStop Plus** optional temperature limiter at 43°C or 46°C included
- built-in non return valve and dirt strainers
- **without roughing-in-set**
- flow performance:  
outlet A (to external shut-off) = 34 l/min  
outlet B/C = 29 l/min

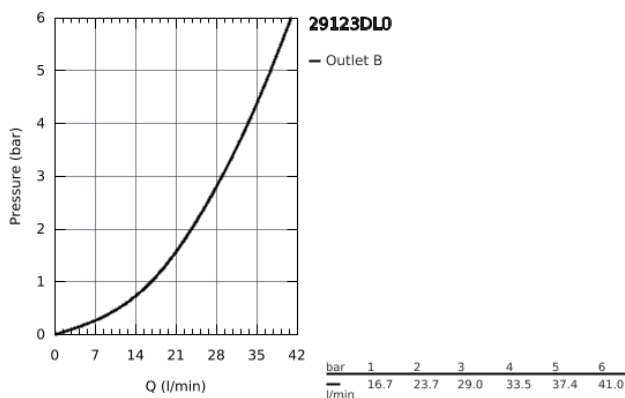

## 29 123 DL0 THERMOSTAT FOR CONCEALED INSTALLATION WITH ONE VALVE

