
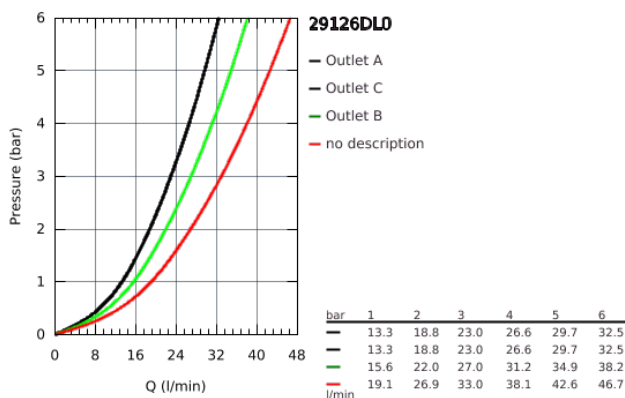


## 29 126 DL0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 3 VALVES

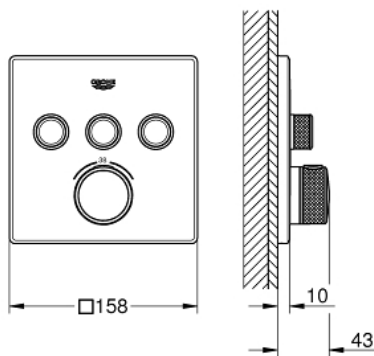

### PRODUCT DESCRIPTION

- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- metal wall escutcheon with **GROHE FastFixation** (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- **GROHE StarLight** finish
- 
- **GROHE SmartControl** push for ON-OFF, turn for volume adjustment from EcoJoy to full flow
- exchangeable symbols
- **GROHE TurboStat** compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 38°C  
( calibration required )
- **GROHE SafeStop Plus** optional temperature limiter at 43°C or 46°C included
- built-in non return valve and dirt strainers
- multiple outlets can be run simultaneously
- **without roughing-in-set**
- flow performance:
  - outlet A = 23 l/min
  - outlet B = 27 l/min
  - outlet C = 23 l/min
  - outlet A + B = 33 l/min
  - outlet A + B + C = 36 l/min

## 29 126 DL0 THERMOSTAT FOR CONCEALED INSTALLATION WITH 3 VALVES

