


Technical Data

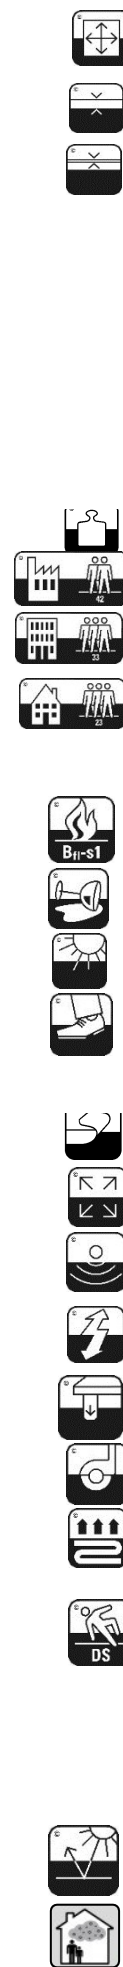

	Standard	Result
Size	EN ISO 24342	See separate table
Thickness	EN ISO 24346	4.5 mm
Wear layer	EN ISO 24340	0.55 mm
Surface treatment		K-Guard+ PU coating
Guarantee	Light industrial	15 years*
	Commercial	15 years*
	Domestic	Lifetime guarantee*
Bevelled edge		No
Mass	EN ISO 23997	7550 g/m2
Standards	EN 649/EN ISO 10582	Pass
Classification	EN 685/EN ISO 10874- Light industrial	42: Light industrial general
	EN 685/EN ISO 10874- Commercial	33: Commercial heavy
	EN 685/EN ISO 10874- Domestic	23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN 423	Class 0
Light fastness	EN ISO 105-B02	≥7
Abrasion resistance	EN 649	Group T
	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434/ EN ISO 23999	≤ 0.10%
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 13 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433/EN ISO 24343-1	Pass ≤ 0.1mm
Castor chair continuous use	EN 425/ISO 4918	Pass
Thermal resistance	ISO 8302	0.0245 m²K/W
		Suitable for underfloor heating. Max 27°C
**Slip resistance	BS 7976	See separate table
	DIN 51130	R10
	DIN 51097	See separate table
	EN 13893	DS
Light reflectance value (LRV)	BS 8493:2008+A1:2010	See separate table
VOC emission	French VOC regulation (ISO 16000)	A+
Adhesive		Please refer to our installation instructions.
Recycling		Suitable

Product	Size (mm)	Slip Resistance			LRV
		BS 7976 (dry)	BS 7976 (wet)	DIN 51097	
LLP101	1050 X 250	61	33	B	28
LLP102	1050 X 250	61	33	B	14
LLP103	1050 X 250	61	33	B	21
LLP104	1050 X 250	61	33	B	12
LLP105	1050 X 250	61	33	B	29
LLP106	1050 X 250	61	33	B	20
LLP108	1050 X 250	61	33	B	31
LLP109	1050 X 250	61	33	B	21
LLP110	1050 X 250	61	33	B	12
LLP111	1050 X 250	61	33	B	12
LLP112	1050 X 250	61	33	B	16
LLP113	1050 X 250	61	33	B	30
LLP92	1050 X 250	61	33	B	34
LLP93	1050 X 250	59	21	B	7
LLP94	1050 X 250	59	21	B	34
LLP95	1050 X 250	59	21	B	38
LLP96	1050 X 250	59	21	B	11
LLP97	1050 X 250	59	21	B	20
LLP99	1050 X 250	59	21	B	31
LLT200	610 X 500	66	29	A	19
LLT201	610 X 500	66	29	A	32
LLT202	610 X 500	66	29	A	44
LLT203	610 X 500	66	29	A	8
LLT204	610 X 500	66	29	A	18
LLT205	610 X 500	66	29	A	8
LLT206	610 X 500	66	29	A	27
LLT207	610 X 500	66	29	A	13

*Subject to terms. Please see our website.

**Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained

For more information:

Call: 01386 820104 For ROI call: 01 6569887

Email: commercial@karndean.co.uk

Visit: www.karndean.com

Manufactured to ISO9001

