

SPECIFICATION SHEET

COLLECTION:

PRODUCT CODE: PRO-5001-N/P



DESCRIPTION:

protherm in-line thermostatic valve
TMV2 approved
supplied with 15mm compression fittings
22mm compression fittings available separately
thermostatic ceramic cartridge
minimum operating pressure 0.2 bar LP

FINISH:

Chrome

FLOW REGULATOR:


N

MINIMUM OPERATING PRESSURE:

0.2 bar LP

FLOW RATE AT 3.0 BAR FLOW PRESSURE:

31 l/min

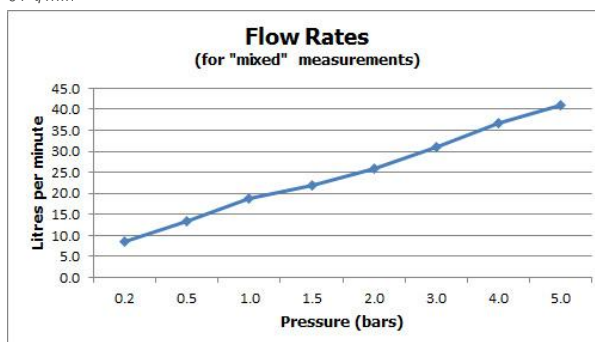

tel: 01934 744466
email: sales@vado.com
www.vado.com


where inspiration flows
taps | showering | accessories



TECHNICAL DRAWING

COLLECTION:

PRODUCT CODE: PRO-5001-N/P

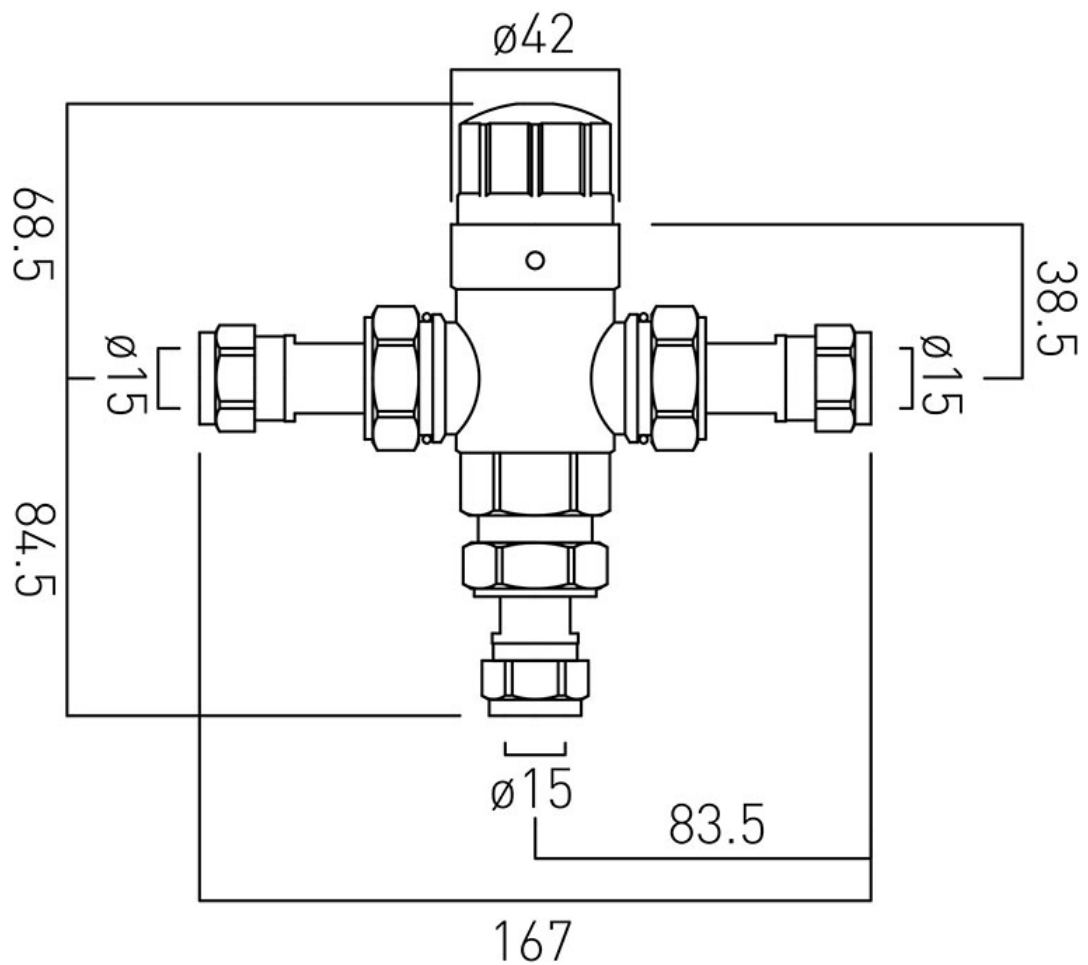

tel: 01934 744466
email: sales@vado.com
www.vado.com

where inspiration flows
taps | showering | accessories

