| Central Heating Model STOCK listed in black | Height mm | Width mm | Finish | Output ΔT=50K Watts/Btu All outputs certified to EN 442 | Weight kg | RRP (ex VAT) | RRP (inc 20% VAT) | | | | |
|---|--------------|-------------|--------|--|--------------|-----------------|-------------------------|--|--|--|--|
| Sehnder Vitalo Bar | | | | | | | | | | | |
| VIP-125-040 | 1250 | 400 | white | 465/1586 | 7.0 | £527 | £632.40 | | | | |
| VIP-125-050 | 1250 | 500 | white | 555/1893 | 8.7 | £551 | £661.20 | | | | |
| VIP-125-060 | 1250 | 600 | white | 641/2186 | 10.5 | £578 | £693.60 | | | | |
| VIP-160-040 | 1570 | 400 | white | 546/1862 | 9.3 | £621 | £745.20 | | | | |
| VIP-160-050 | 1570 | 500 | white | 676/2305 | 11.4 | £642 | £770.40 | | | | |
| VIP-160-060 | 1570 | 600 | white | 806/2748 | 13.6 | £665 | £798.00 | | | | |
| VIP-190-040 | 1890 | 400 | white | 673/2295 | 10.9 | £645 | £774.00 | | | | |
| VIP-190-050 | 1890 | 500 | white | 834/2844 | 12.7 | £686 | £823.20 | | | | |
| VIP-190-060 | 1890 | 600 | white | 994/3390 | 14.6 | £704 | £844.80 | | | | |


| Electric Heating Model | Height mm | Width mm | Finish | Watts Radio frequency remote programmer IPX4 Zone 1 Bath, Zone 2 Shower, Class II | Weight kg | RRP (ex VAT) | RRP (inc 20% VAT) | | | |
|-----------------------------|--------------|-------------|--------|---|--------------|-----------------|-------------------------|--|--|--|
| Zehnder Vitalo Bar Electric | | | | | | | | | | |
| VIPE-125-040/GF | 1250 | 400 | white | 350 | 7.5 | £693 | £831.60 | | | |
| VIPE-160-040/GF | 1570 | 400 | white | 500 | 10.0 | £780 | £936.00 | | | |
| VIPE-160-050/GF | 1570 | 500 | white | 500 | 12.0 | £798 | £957.60 | | | |
| VIPE-190-040/GF | 1890 | 400 | white | 500 | 12.0 | £790 | £948.00 | | | |
| VIPE-190-050/GF | 1890 | 500 | white | 750 | 14.0 | £837 | £1,004.40 | | | |
| VIPE-190-060/GF | 1890 | 600 | white | 1000 | 16.0 | £886 | £1,063.20 | | | |

Colour finish: Standard colours from the Zehnder colour chart including matt white finish: white RAL 9016 + 25%. Colour finish and non-stock products delivery: 20 working days.

___50

VIP-190

Suitable for all low temperature systems, heat pumps and condensing boilers, open and closed systems ($<80^{\circ}$ C)

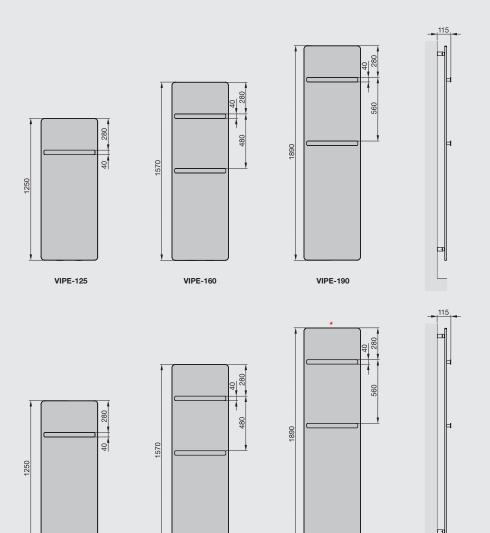



The aluminium honeycomb structure, with its meandering copper pipe, is filled with graphite, enabling heat to be distributed throughout the entire front of the radiator quickly and evenly. Suitable for all low temperature systems, heat pumps, condensing boilers, open or closed heating systems.

*1/2" air vent Height includes air vent F = flow R = return

R = return H = height W = width

All dimensions in mm

For full **C** compliant technical specifications, refer to page 140

To make an approximate conversion from T=50K to T=60K multiply outputs by 1.2

VIP-160

VIP-125