

HARKEN®


INSTRUCTION SHEET

303 Wire Sheave 25 mm (1")

N15W24983 Bluemound Rd., Pewaukee, WI 53072-4974 USA

Telephone: (262) 691-3320 • Fax: (262) 701-5780

Web: www.harken.com • Email: harken@harken.com

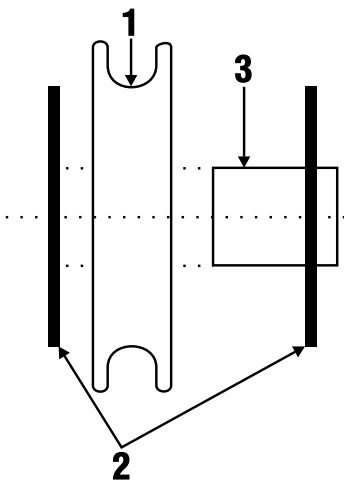

No.	Description	Sizes and Part No.
1	Sheave	Max line 4 mm ($\frac{5}{32}$ ")/max wire 2 mm ($\frac{3}{32}$ ")
2	Thrust washers	MP-0100
3	Inner race	MS-05

Maintenance

Harken equipment requires minimal maintenance, but some is needed to give the best service and to comply with Harken's limited warranty.

It is important to keep equipment clean by frequently flushing with fresh water. In corrosive atmospheres, stainless parts may show discoloration around holes, rivets, and screws. This is not serious and can be removed with a fine abrasive.

Important! Exposure to some teak cleaners and other caustic solutions can result in discoloration of part and is not covered under the Harken warranty.

Warranty

For additional safety, maintenance, and warranty information: www.harken.com/manuals or the Harken catalog.