Become the first choice in respiratory care.



Nasal Pillows Interface (P6)

To rebuild your dream





BMC Medical Co., Ltd.

Room 110, Tower A Fengyu Building, No.115 Fucheng Road, Haidian, 100036 Beijing, PEOPLE'S REPUBLIC OF CHINA Tel: +86-10-5166 3880 / Fax: +86-10-5166 3880 ext. 810 / en.bmc-medical.com

Nasal Pillows Interface (P6)

Main Features



Circular Dispersion Vent

The circular dispersion vent keep the noise as low as 18dB (A) and meanwhile protect your bed partner from being disturbed.

All Size Kit

Three nasal pillow sizes, namely L, M and S, come in the package.





Modular Main Frame

The main frame is compatible with all pillow sizes.


Three-point-adjustable Headgear

The adjustable headgear is fit for most of the head sizes. Wider range, more inclusiveness.



Technical Specifications

Pressure-Flow Curve

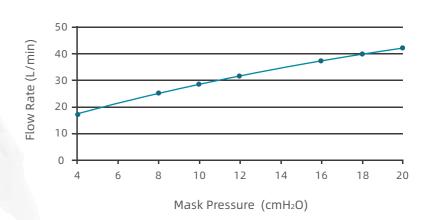

Pressure (cmH ₂ O)	4	8	10	12	16	18	20
Flow Rate (L/min)	17	25	28	31	37	40	42

Dead Space Information

Dead space is the empty volume of the nasal pillows and short tube assembly up to the swivel. The dead space of the P6 for Large pillows is 92 ml.

Therapy Pressure

4 to 20 cm H_2O .

Resistance

Drop in Pressure measured (average for 3 sizes) at 50 L/min: $0.4 \text{ cmH}_2\text{O}$ at 100 L/min: $1.4 \text{ cmH}_2\text{O}$

Sound

DECLARED DUAL-NUMBER NOISE EMISSION VALUES in accordance with ISO 4871. The A-weighted sound power level of the mask is 26 dBA, with uncertainty 3 dBA. The A-weighted sound pressure level of the mask at a distance of 1 m is 18 dBA, with uncertainty 3 dBA.

