


1. Standard Stair Tread



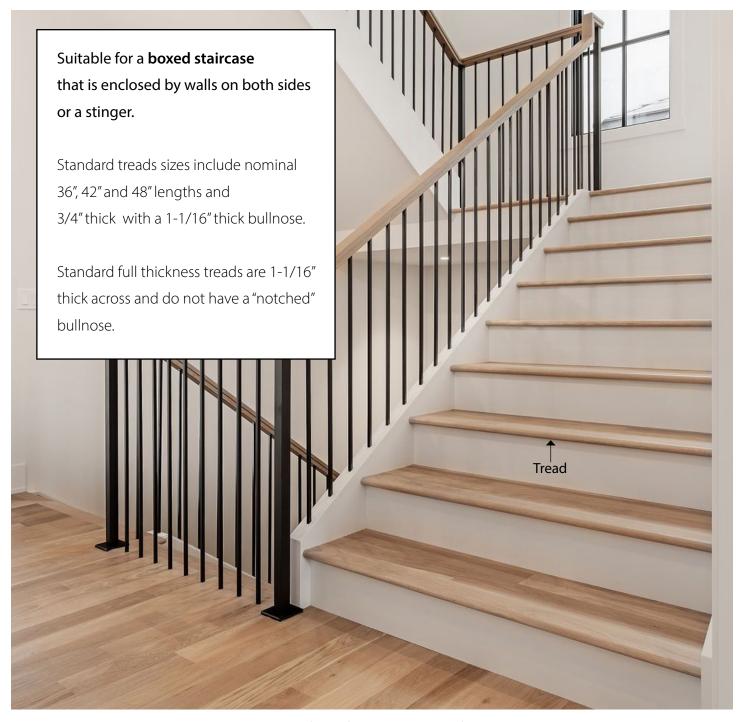


STANDARD TREADS

CUSTOM QUOTE

Standard Stair Tread Measuring and Dimension Guide



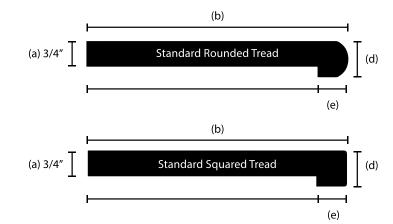

DIMENSIONS (ALL REQUIRED)

(a)		
(b)		
(c)		
(d)		
(e)		
Standard	8 mm	2 mm
	(b) (c) (d) (e)	(b) (c) (d) (e)


Quantity:




FULL THICKNESS STANDARD TREADS

CUSTOM QUOTE

Standard Stair Tread Measuring and Dimension Guide






DIMENSIONS (ALL REQUIRED)

Tread Thickness (Standard: 1-1/16")	(a)		
Tread Width (Standard: 11-1/2")	(b)		
Tread Length (36", 42", 48" are standard sizes)	(c)		
Bullnose Style (choose one)	Standard	8 mm	2 mm
Quantity:			




2. Return/Universal Stair Tread

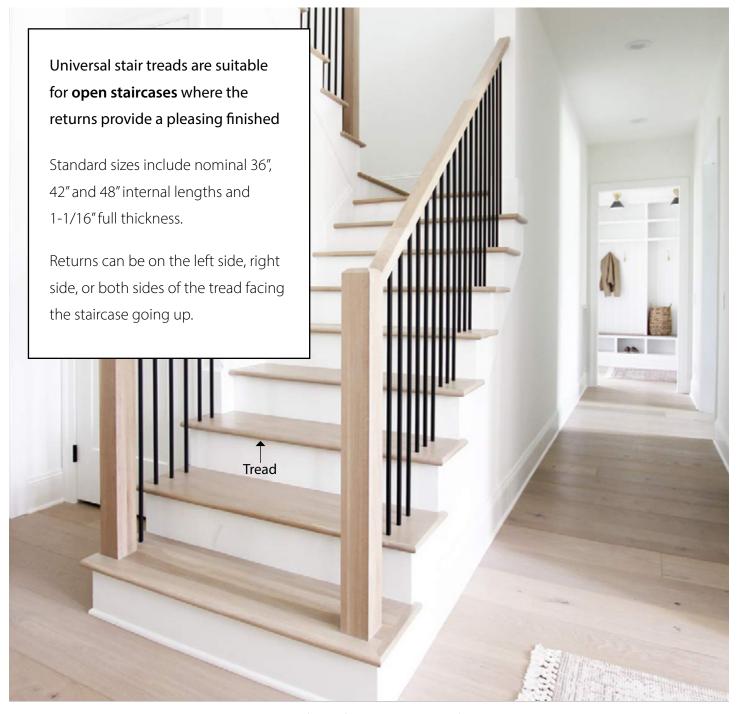



RETURN TREADS CUSTOM QUOTE

Return Stair Tread Measuring and Dimension Guide

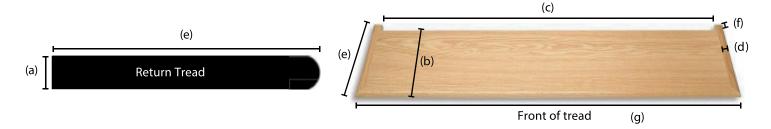

Tread Thickness (full thickness 1-1/16")	(a)
Internal Tread Width (Standard: 11-1/2")	(b)
Internal Tread Length (Standard: 36", 42" 48")	(c)
Return Width (Standard: 1-1/2")	(d)
Tread Width (Standard: 11-1/2"Internal width plus return extension)	(e)
Return Extension (Standard: 1-1/2")	(f)
External Length (Internal Length Plus Return Widths)	(g)
Bullnose Style (choose one)	Return Side (Add Quantity)
Standard 8 mm 2 mm	Left Right Both



3. Rounded Tread - Double Ended




37 W 20th Street, New York, NY 10011 • 212.337.3433 • info@pidfloors.com • www.pidfloors.com




STARTER STEP (KIT)

CUSTOM QUOTE


The starter step kit includes tread rounded on both ends, riser foundation, rounded cove and base shoe.

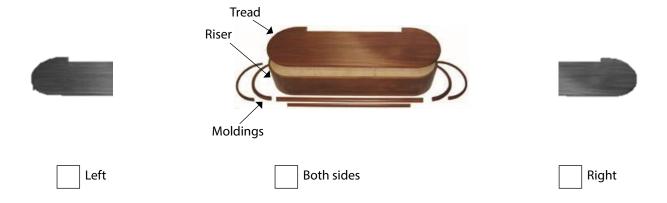

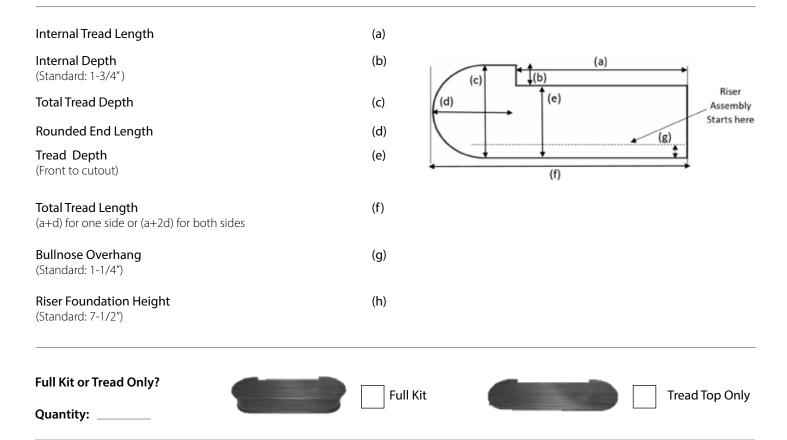



4. Pie Shaped Stair Treads

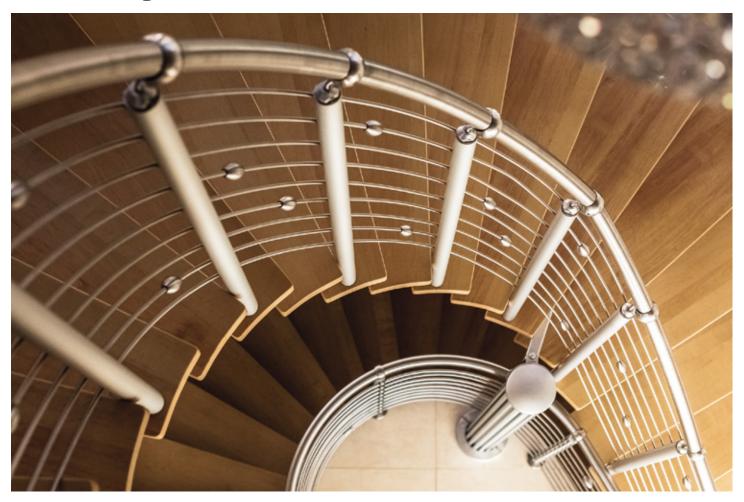




PIE SHAPED STAIR TREADS

CUSTOM QUOTE


Suitable for spiral staircase applications. Templates are encouraged.



Choose Type Left Hand	Right Hand		
Back of tread length	(a)	Angle	(e)
Front of tread length	(b)	Angle	(f)
Inside width	(c)	Angle	(g)
Outside width	(d)	Angle	(h)
Straight or Curved	(i)	Straight or Curved	(j)
Thickness of tread (standard is 1-1/16")	(k)		
Bullnose style	(1)		
Bullnose Style (choose one)	Standard	8 mm 2 mm	
Indicate surfaces to be finished:	Top From	nt Left Side Right Side	Back Bottom
Quantity:			




5. Floating/Box Treads

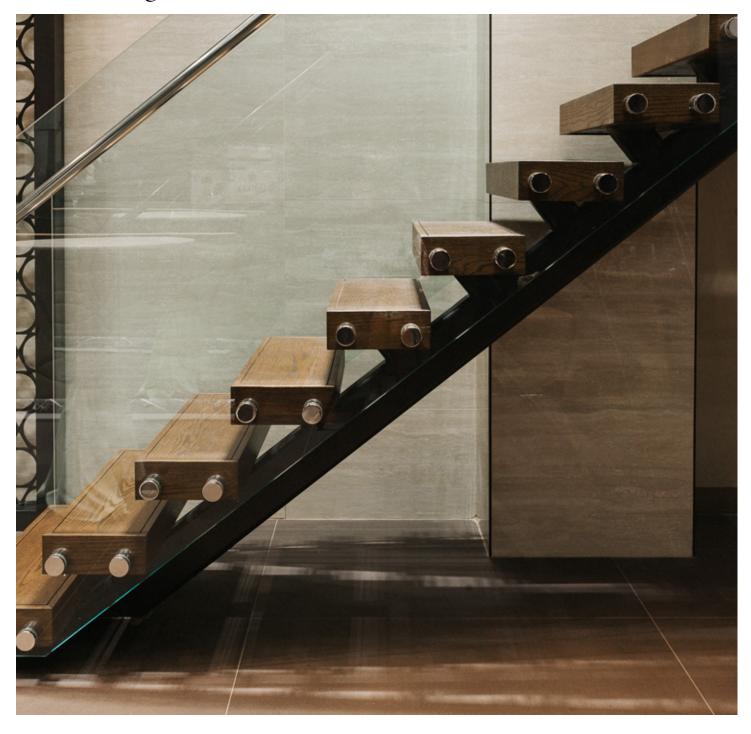



FLOATING/BOX TREADS

CUSTOM QUOTE

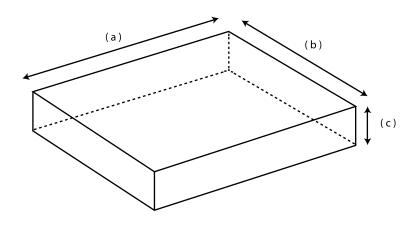

CUSTOM DIMENSIONS (ALL REQUIRED)

	8 mm	<u>2 mm</u>
Bullnose Style (choose one)		

Note: All edges to have this profile


Thickness	(a)		
Width	(b)		
Length	(c)		
Indicate surfaces to be finished:	Top Front	Left Side Right Side	Back Bottom
Indicate method of installation:	From Bottom	From Side	Other

Quantity: _____






6. Riser

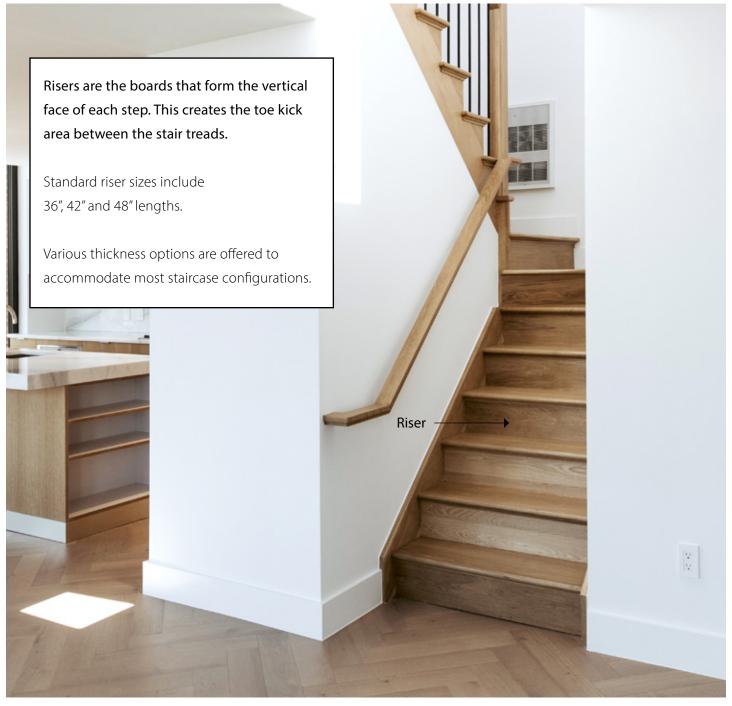



RISERS CUSTOM QUOTE





Riser Length (Standard: 36", 42", 48")	(a)	
Riser Thickness (Standard: 3/4")	(b)	
Riser Width/Height (Standard: 7-1/2")	(c)	
Finished On	Top only	Other
	All sides	
Quantity		