TOKYOFLASH JAPAN®

psi

INSTRUCTION MANUAL

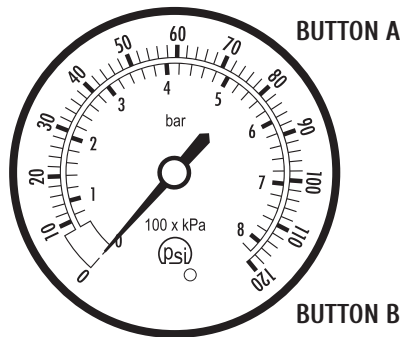BUTTON A

BUTTON B

1. HOW TO READ THE TIME

· The time is indicated by the numbers 0-120 on the outer PSI dial.

· The needle always rests at 0.

· Press button A to show the time.

· The needle will move 3 times to indicate in turn: the hour, 10 minute group, and single minutes.

· The needle will return to 0.

20 = 2 o'clock

100 = 10 o'clock

40 = 40 minutes

20 = 20 minutes

70 = 7 minutes

Time: 2:47

80 = 8 minutes

Time: 10:28

2. HOW TO SET THE TIME

- You will set the following in sequence: hour > 10 minute group > single minutes.

I. Hour

- Press button B to enter setting mode. The red LED will flash.

- Press button A to move the needle to the correct hour.

- Press button B to confirm and move to the minutes setting.

II. 10 Minute Group

- Press button A to move the needle to the correct 10 minute group.

- Press button B to confirm and move to single minutes setting.

III. Single Minutes

- Press button A to move the needle to the correct single minute.

- Press button B to confirm and finish setting.

3. HOW TO CHARGE THE WATCH

- When the red LED becomes dim or does not light up, if the needle no longer moves, or if you have not used the watch for 2 months, you should recharge the watch.

- The watch can be recharged by connecting the USB charging cable provided to the watch USB port and to your computer's USB port.

- To open the watch USB port, use the screw driver included with the watch so as not to damage the screw head.

- It is advised that you only use the USB cable provided to recharge the watch because it is designed for this watch.

- When charging, the red LED will flash.

- When the red LED stops flashing, the watch is fully charged.

- It is advised that you continue to charge the watch for the full 2 hours to ensure the battery is 100% charged.

4. CALIBRATING THE NEEDLE

- Sometimes, due to low battery, the needle may not rest at 0 or may not move to the correct position. If this happens you can calibrate the needle position to 0.

- Connect the USB charging cable provided to the watch USB port and to your computer's USB port.

- To open the watch USB port, use the screw driver included with the watch so as not to damage the screw head.

- It is advised that you only use the USB cable provided because it is designed for this watch.

- The red LED will flash.

- Press button B, and with each press, the needle will move one step clockwise or counter clockwise.

- To change the direction the needle moves in, disconnect and reconnect the USB charging cable and press button A.

- When the needle position is at 0 it is correctly calibrated and you can disconnect the USB charging cable.

5. INCLUDED IN THE BOX

- *Watch*

- *USB cable*

- *Screw driver*

- *Spare USB screw*

- *Instruction manual*

6. USER INFORMATION

I. Battery

- This watch uses a 3.7V PL401119 rechargeable battery.

- The battery should last for 2 months between charges.

- The battery lifetime is expected to be 300 charges.

- Only use the cable provided with the watch for recharging, as it is designed specifically for this watch.

II. Warranty

· This watch is covered by a 1 year warranty. This warranty does not cover water damage, accidental damage, neglect or unauthorized repair.

III. Water Resistance

· This watch has limited water resistance. Please do not use the watch in the shower, for swimming or for other water related activities.

7. SPECIFICATIONS

Case Materials: Stainless Steel

Strap Materials: Leather / Nylon

Case Dimensions: 45 mm x 45 mm x 14 mm

Finish: Sandblasted Stainless Steel / IP Black

Wrist Size: Approx. 150 mm - 210 mm (adjustable)

Weight: 65 grams

Movement: Patented Motor Movement

Battery: 3.7V PL401119 rechargeable battery

change the way you think about time

www.tokyoflash.com