

LowCat™ Tunnel Hoops

Technical Sheet

Neversink Tools

1572 South Maple Avenue,
Cookeville TN 38506

neversinkcustomerservice@gmail.com

Manufactured by Neversink Tools in TN, USA

Hoop Specs:

Uprights: #2 gauge (0.276" / 7.0mm) Zinc Coated

High-Carbon Steel

Top Bar: #8 gauge (0.156" / 4.0mm) Spring Tempered

Stainless Steel 302


Shock Cord: 4mm Polyester and Natural Rubber Latex

Dimensions: 27 to 44" wide, 27 to 30" tall

Compatible with all agricultural coverings

LowCat low tunnels work with insect netting, frost protection, poly plastic, and shade cloth

Covering width - 30" Model 6' to 7.5' / 40" Model 7' to 8.5'

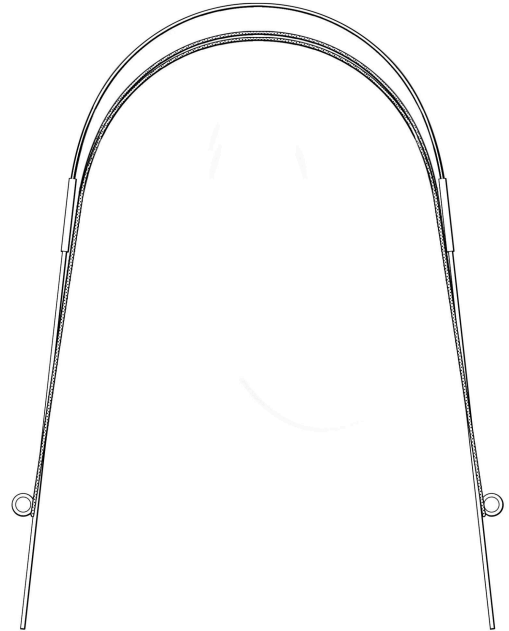

LowCat Frost Protection Covering

FP-20: 20 gsm (grams per square meter) has 82% light transmission with 3.5-4.5 degree F of frost protection (down to 27.5 F). It is 0.77 oz per sq yard
Option 2: 15 gsm (grams per square meter) - 0.44 oz./sq.ft. • Dimensions: 83 in. wide by 120

FP-30: 30 gsm (grams per square meter) has 70% light transmission with 5-6 degree F of frost protection (down to 26 F) It is 1.15 oz per sq yard.

LowCat Insect Netting: 36 gms (grams per square meter) 100 Mesh (0.35mm x 0.35mm). 90% Light Transmission. Knitted UV protected. It will keep out flea beetles, Thrips, and larger insects.

LowCat Perforated Poly: 95% Light transmission. Anti-Drip. UV Protected. Available in 0.8, 1.5, 3.0 mil low density clear polyethylene.

LowCat Heavy Duty Poly: 85% Light transmission. Anti-Drip. UV Protected. Available in 4 mil low density clear polyethylene.

LowCat Shade Cloth: Available in 35%, 55% and 70% shade. Knitted polyethylene