



SOFTPRO® COMMERCIAL HE UPFLOW+ SERIES

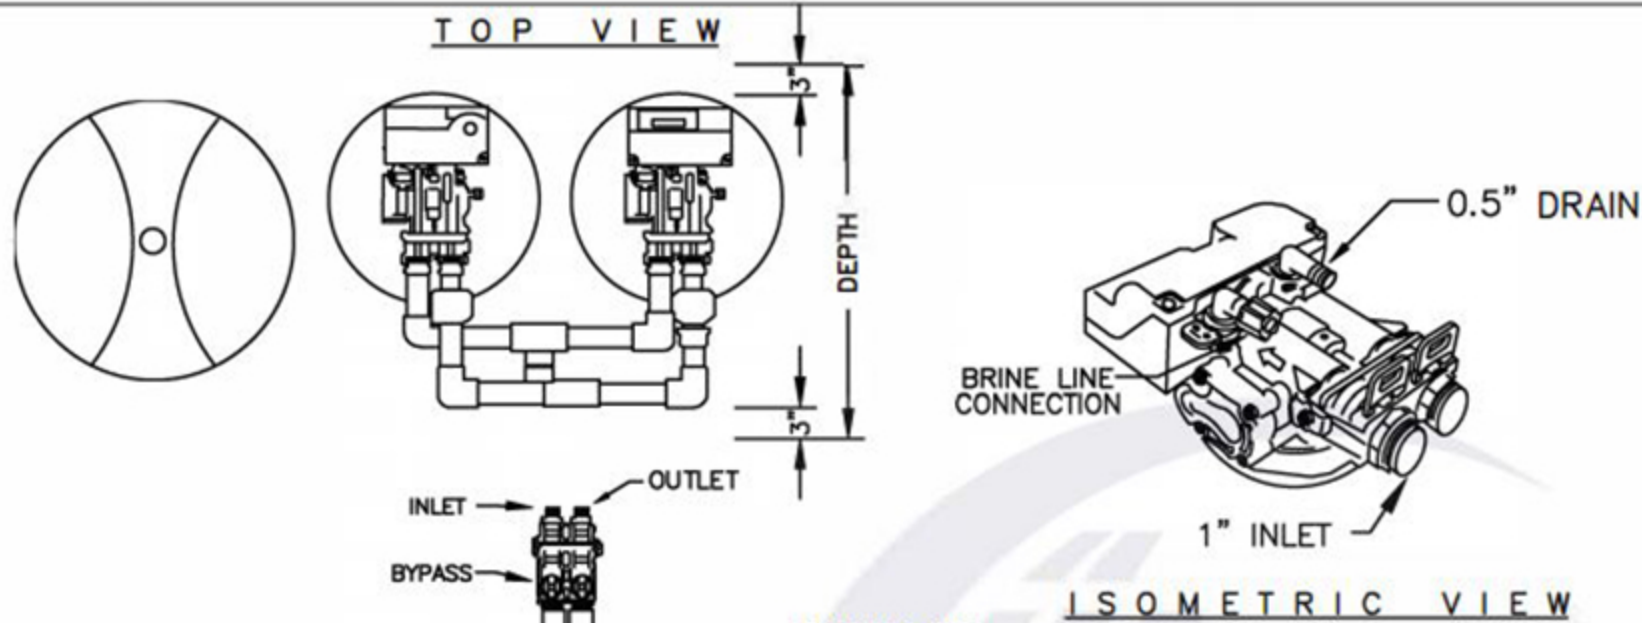

Model	Softener Tank	Brine Tank	Approx. Space Required		
	Diag. x Ht. Inches (mm)	Diag. x Ht. Inches (mm)	Height	Depth	Width
SP-23TA 22,500 Cap.	8 x 44 (203 x 1118)	18.1 x 34.5 (460 x 876)	48 (1219)	16 (406)	22 (559)
SP-30TA 30,000 Cap.	9 x 48 (229 x 1219)	18.1 x 34.5 (460 x 876)	58 (1473)	16 (406)	23 (584)
SP-45TA 45,000 Cap.	10 x 54 (254 x 1372)	18.1 x 34.5 (460 x 876)	64 (1626)	16 (406)	24 (610)
SP-60TA 60,000 Cap.	12 x 52 (305 x 1321)	20.3 x 40.5 (516 x 950)	62 (1575)	16 (406)	26 (660)
SP-90TA 90,000 Cap.	14 x 65 (356 x 1651)	23 x 40.5 (584 x 1029)	75 (1905)	16 (406)	28 (711)

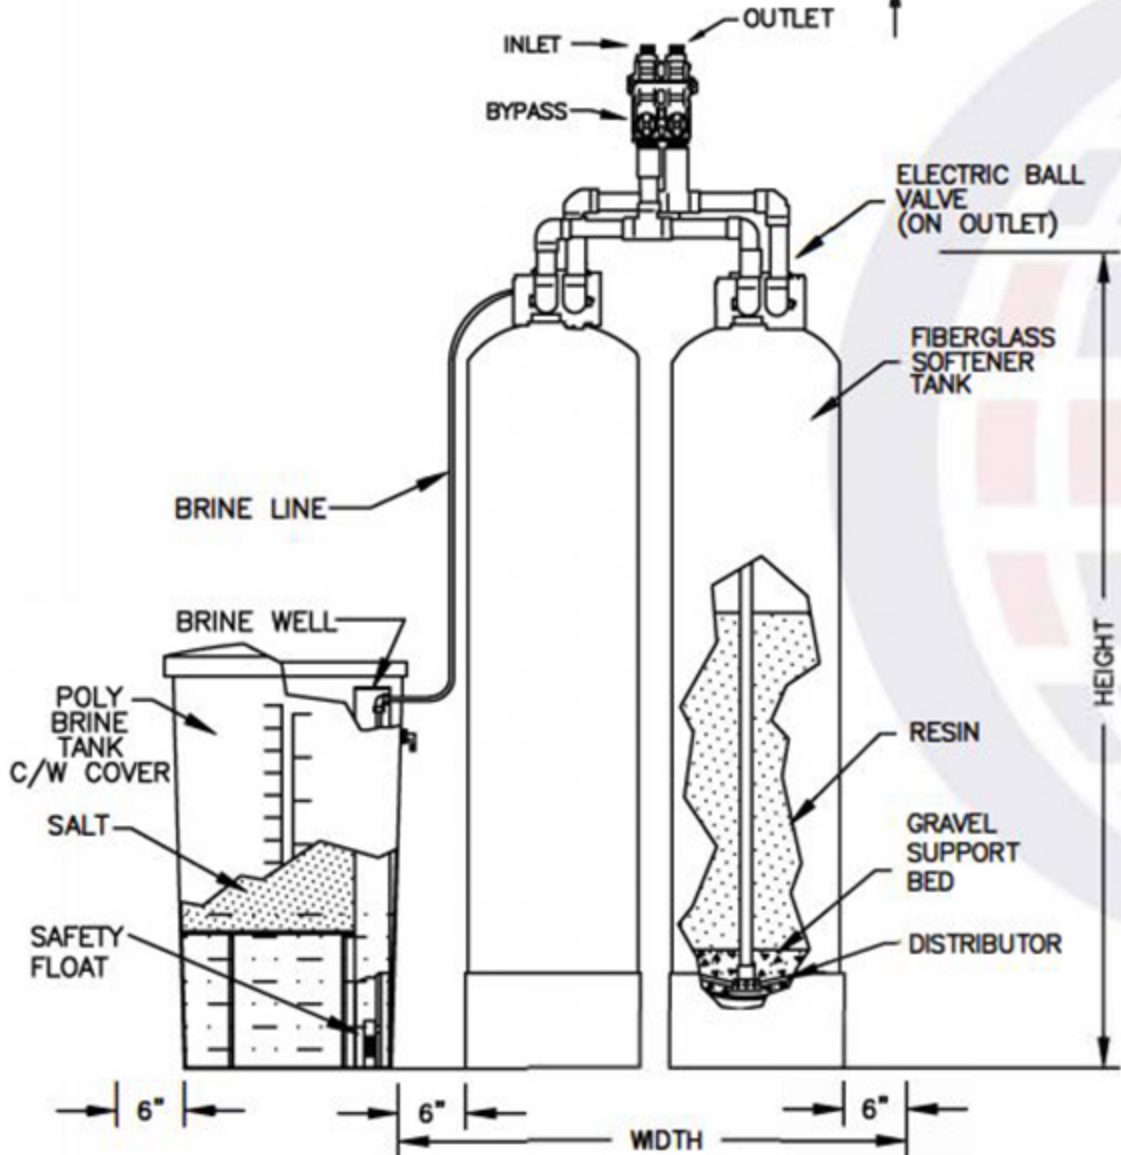

SPECIFICATIONS	
MODEL NO.:	85TA-23
MAX. SYSTEM PRESSURE:	125 P.S.I. 862 KPa
RESIN VOLUME:	0.77 FT. ³ 0.021 M. ³
SALT PER REGENERATION:	7.5 LBS. 3.41 KG.
EXCHANGE CAPACITY:	20 KILOGRAMS @ 10 lb soft
FLOW RATES: CRITICAL APPLICATION	3.75 U.S.G.P.M. 0.24 L.P.S.
PER UNIT : 15 PSI DROP	10.4 U.S.G.P.M. 0.66 L.P.S.
: 25 PSI DROP	14.3 U.S.G.P.M. 0.9 L.P.S.
MAX. FLOW TO DRAIN:	1.5 U.S.G.P.M. 0.09 L.P.S.
MAX. TEMPERATURE:	100 F 38 C

- NOTES:**
- SINGLE SOFTENER, METER INITIATED.
 - SOFTENER EQUIPPED WITH 85TA SERIES ELECTRONIC CONTROL VALVE WITH METER
 - PIPING MANIFOLD CAN BE CONFIGURED IN UPRIGHT POSITION (OPPOSITE OF POSITION SHOWN IN FRONT VIEW)
 - MINERAL TANKS ARE NSF/ANSI 44 CERTIFIED FOR MATERIALS AND STRUCTURAL INTEGRITY.
 - UNIT MAX. PRESSURE 125 PSI, (860 KPa), MAX. TEMP 100 F (38 C)
 - RAW WATER UPFLOW REGENERATION
 - ALL EXTERNAL PIPING, FITTINGS, VALVING SUPPLIED BY OTHERS
 - DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. FLEX CONNECTORS MAY BE REQUIRED.
 - INSTALLATION OF A VACUUM BREAKER RECOMMENDED
 - 115 VOLT POWER SUPPLY STANDARD.



COMMERCIAL
WATER TREATMENT
SOLUTIONS BY **SoftPro**