

**Item Number**  
RAM-VB-159NR

# RAM No-Drill™ Seat Bases

RAM Mounting Systems

**Vehicle base for the**  
**MINI COOPER** (2006-NEWER)  
**NISSAN NV200 S Compact Cargo** (2013-2014)  
**Nissan NV200 SV Compact Cargo** (2013-2014)

## SPECIFICATIONS

### Placement

Passenger side, in front, where seat frame meets floor board.

### Drilling Required

None - uses existing seat bolts

### Pole or Pedestal

Ordered Separately

### Seat Configuration

Bucket

### Weight

7 lbs.

### Construction/Finish

Steel/Black Powder coat

**Note:** Will limit forward most seat travel on passenger side.

### Dimensions

A = 16.88", B = 9.5", C = 1.55"

Hole Centers = 15" to 15.5625"


## Features

Installs in minutes with no drilling required  
Won't interfere with levers

## Misc.

Base installs between the passenger side seat legs and floor board.

Compatible with 2006 and Newer Mini Cooper

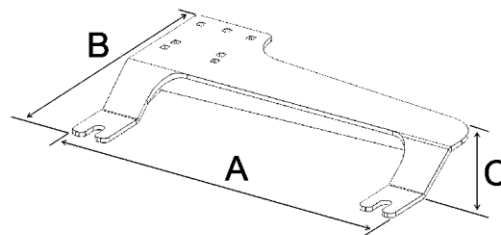

RAM-VB-159NR

### RAM Mounting Systems

8410 Dallas Ave S  
Seattle, WA 98108  
Phone: (206) 763-8361  
Fax: (206) 763-9615  
www.rammount.com  
support@rammount.com



RMR-INS-VB-159NR

**Item Number**  
RAM-VB-159NR

# RAM No-Drill™ Seat Bases

RAM Mounting Systems

**Vehicle base for the**  
**MINI COOPER** (2006-NEWER)  
**NISSAN NV200** (2013)

## INSTALLATION INSTRUCTIONS

Mini installation:

1. If you purchased a complete No Drill system, you will want to attach products to the base before installation. This includes, risers, stabilizer feet, and lower female pole units. It is much more difficult to attach these items once the base is in place.
2. For the Mini Cooper, using a T-40 Torx bit, loosen the four bolts holding the seat frame track to the floor board. These are located at the front and rear of the passenger side seat. Move the seat to its forward most position to access the two in the back. Move the seat to its rear most position to access the bolts in the front. Loosen enough to create a gap of one quarter inch between the seat frame and the floor board.
3. Gently lift the passenger side seat enough to allow you to slide the No Drill base under the seat frame tracks. Position the base so that the slots are aligned with the seat frame bolts, press the base under until the back of the slots touch the bolts.
4. Once in place, re-tighten all four of the bolts holding the seat frame to the floor board.

NV200 Installation:

1. Remove the plastic caps covering the front passenger side seat bolt hex heads.
2. Using a socket wrench, loosen the two hex bolts enough to allow space for the base to slide underneath the seat legs.
3. Slide the base under the seat legs so the back of the slots touches the seat leg bolts.
4. Re-tighten the seat leg bolts and replace the plastic caps over the hex bolts.

**RAM Mounting Systems**  
8410 Dallas Ave S  
Seattle, WA 98108  
Phone: (206) 763-8361  
Fax: (206) 763-9615  
[www.rammount.com](http://www.rammount.com)  
[support@rammount.com](mailto:support@rammount.com)



RMR-INS-VB-159NR