


# RAM® PRESS-N-LOCK™ ASSEMBLY & INSTALLATION GUIDE

## PARTS INDEX:

- A. RAM PVC PIPE (QTY. 1)  
(PIPE LENGTH MAY VARY)
- B. RUBBER FRICTION SLEEVE (QTY. 1)
- C. RAM BALL WITH PVC SOCKET (QTY. 1)
- D. BOTTOM FINGER CAP (QTY. 1)

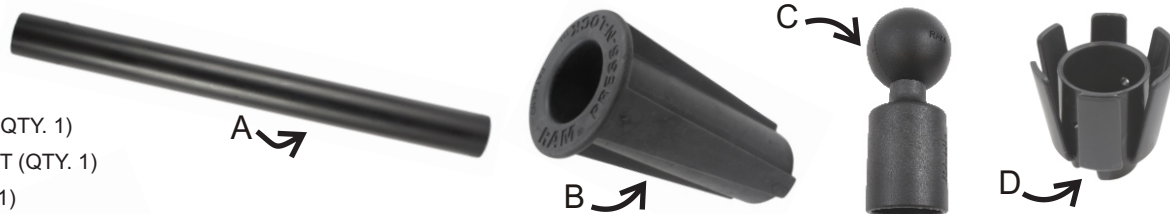

## ASSEMBLY INSTRUCTIONS

1. SLIDE (B) FRICTION SLEEVE ONTO CENTER OF (A) PVC PIPE.



2. SECURE BOTH ENDS OF PVC PIPE TO (C) BALL ADAPTER AND (D) FINGER CAP USING PVC CEMENT.



RAM Mounting Systems  
8410 Dallas Ave S  
Seattle, WA 98108  
Phone: (206) 763-8361  
Fax: (206) 763-9615  
www.rammount.com  
support@rammount.com


**WARNING: NOT SUITABLE TO SUPPORT ROD HOLDERS  
FOR TROLLING APPLICATIONS**

## INSTALLATION INSTRUCTIONS

3. INSERT PRESS-N-LOCK™ INTO FACTORY ROD HOLDER TUBE.




**BOTTOM FINGER CAP MUST PROPERLY  
SEAT OVER GIMBAL AS SHOWN.**

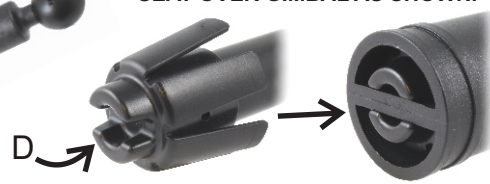

4. SLIDE (B) FRICTION SLEEVE INTO OPENING OF THE FACTORY ROD HOLDER TUBE. PRESS FIRM AND TWIST TO JAM FRICTION SLEEVE IN PLACE. FRICTION SLEEVE WILL GRIP PVC PIPE IN PLACE WHEN TIGHTENED.

**CHECK FRICTION SLEEVE  
PERIODICALLY TO ENSURE PROPER  
FITMENT IN ROD HOLDER TUBE.**




**RAM  
MOUNTS**  
RPR-INS-385

This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.

# RAM® PRESS-N-LOCK™ ASSEMBLY & INSTALLATION GUIDE

## PARTS INDEX:

- A. RAM PVC PIPE (QTY. 1)  
(PIPE LENGTH MAY VARY)
- B. RUBBER FRICTION SLEEVE (QTY. 1)
- C. RAM BALL WITH PVC SOCKET (QTY. 1)
- D. BOTTOM FINGER CAP (QTY. 1)

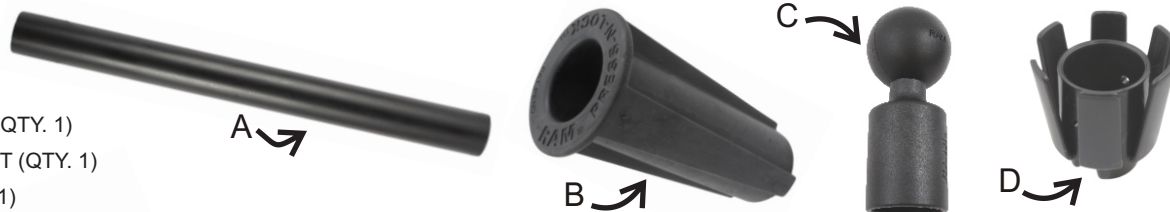

## ASSEMBLY INSTRUCTIONS

1. SLIDE (B) FRICTION SLEEVE ONTO CENTER OF (A) PVC PIPE.



2. SECURE BOTH ENDS OF PVC PIPE TO (C) BALL ADAPTER AND (D) FINGER CAP USING PVC CEMENT.



RAM Mounting Systems  
8410 Dallas Ave S  
Seattle, WA 98108  
Phone: (206) 763-8361  
Fax: (206) 763-9615  
www.rammount.com  
support@rammount.com

**WARNING: NOT SUITABLE TO SUPPORT ROD HOLDERS  
FOR TROLLING APPLICATIONS**

## INSTALLATION INSTRUCTIONS

3. INSERT PRESS-N-LOCK™ INTO FACTORY ROD HOLDER TUBE.




**BOTTOM FINGER CAP MUST PROPERLY  
SEAT OVER GIMBAL AS SHOWN.**



4. SLIDE (B) FRICTION SLEEVE INTO OPENING OF THE FACTORY ROD HOLDER TUBE. PRESS FIRM AND TWIST TO JAM FRICTION SLEEVE IN PLACE. FRICTION SLEEVE WILL GRIP PVC PIPE IN PLACE WHEN TIGHTENED.

**CHECK FRICTION SLEEVE  
PERIODICALLY TO ENSURE PROPER  
FITMENT IN ROD HOLDER TUBE.**



**RAM  
MOUNTS**  
RPR-INS-385

This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.