


### Shark Bifacial

N-type

Bifacial Double Glass Mono Module

**550-575W**

ISO9001:2015: Quality Management System  
 ISO14001:2015: Environment Management System  
 ISO45001:2018: Occupational health and safety management systems

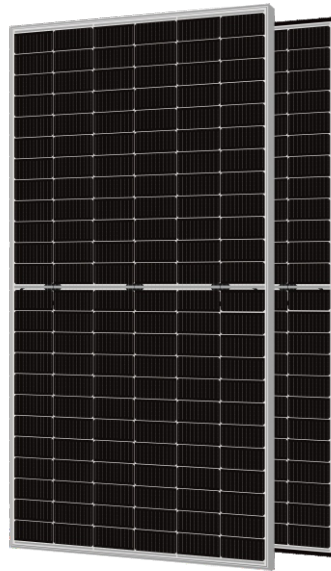

**575 Wp**

Maximum Power Output

**0~ +5W**

Power Output Tolerance



**10-30% Additional Power Generation**

30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



**Better Weak Illumination Response**

Higher power output even under low-light environments like on cloudy or foggy days



**ZERO LID (Light Induced Degradation)**

N-type solar cell has no LID naturally which can increase power generation



**Better Temperature Coefficient**

Higher power generation under working conditions, thanks to passivating contact cell technology



**Lower LCOE**

Higher bifaciality, higher power output and lower BOS cost




**Wider Applicability**

More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area

**Loom Solar Delivers Reliable Performance Over Time**

- Leader of high efficiency solar modules.
- Full-automatic facility and industry-leading technology
- Best-in-class durability and reliability

**Linear Performance Warranty**

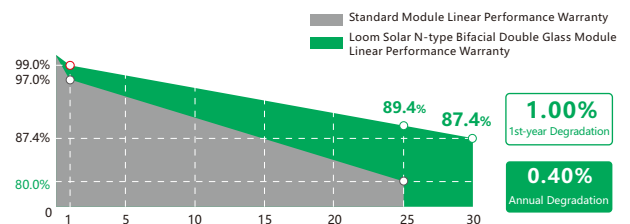

12 Years Product Material & Workmanship

30 Years Linear Performance Warranty



