


iLOFT TELEPHONE VDS EXTRA

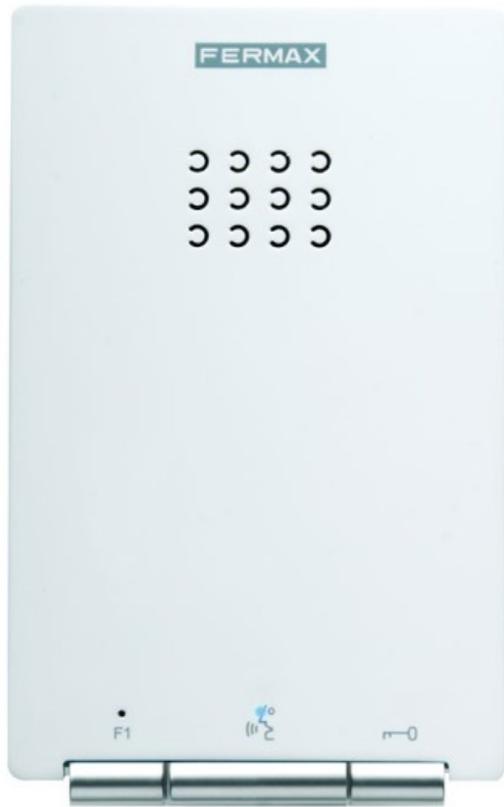

Reference: 05601

Audio terminal. Installed in homes, enables communication with outdoor panel and door opening. Allows hands-free communication.

A new telephone concept for the home. Integrated design, in line with...

DESCRIPTION

Audio terminal. Installed in homes, enables communication with outdoor panel and door opening. Allows hands-free communication.

A new telephone concept for the home. Integrated design, in line with new trends and lifestyles, simple and functional, combining quality and design.

Pure lines. A silhouette suspended on the wall, barely outlined: This is iLoft, the most innovative FERMAX telephone. Compact. Extra-flat line equipment, where the quality and care of the materials and the simplicity of lines unite to provide an architectural, minimalist and subtle design. Made in high impact ABS plastic with mirror polished finish for easy cleaning. Easy to fit wall mounted installation.

VDS system: Simplified installation door entry system using no house call wires. The call is made by transmitting a digital call code generated by the VDS amplifier.

VDS amplifier comes with voice synthesizer as standard issue. When the door release is activated the message is heard: "Door open, please close after entering".

The home terminals require simple programming, done from the outdoor panel or the phone handset. With this programming, a call code is assigned to each terminal.

Communication is private.

Audio

Wiring: 3-wire bus.

Maximum distance from first access to last home: 200 m.

TECHNICAL SPECIFICATIONS

Screw-on surface assembly.

Power supply: 18 Vdc.

FERMAX

- Audio on/off button.
- Door release and guard unit call button.
- 5 selectable call tunes.
- Sequential volume control.
- Totally hands-free operation. Once the outdoor panel-home channel is activated, communication is simultaneous (full duplex).
- Optional change from hands-free to press-to-talk, useful in very noisy surroundings.
- 3 signal LEDs:
 - Blue: calling/in communication.
 - Green: automatic open function on.
 - Red: do not disturb function – volume off

Private communication. Conversation privacy. Maximum talking time: 90 seconds.
Door bell: for direct house call button connection to telephone.
With call connection extension or lights and bells switch.
With 1 pushbutton for additional functions.

Operating temperature: 5, +40 °C
Dimensions: 146 (height) x 90 (width) x 20 (depth) mm Consumption:

- in standby: 24 mA.
- active: 100 mA

Weight: 0,1620886 kg

Size of product when packed: 15x9,5x3,3 cm

EAN 13: 8424299056012

FERMAX

ABN:96 059 925 692



FERMVISION

RISCO GROUP

EGi

CROSS POINT Guardall



smile

by FERMAX



product design award

2014

Audio, Video and IP Intercoms
Access Control
Sound Distribution
Security Intruder Alarms
CCTV and IP Cameras
Residential
Commercial
Security Consultancy

NSW

U1, 37-39 Green St.
Banksmeadow, NSW. 2019
p. 61 2 9700 1700
f. 61 2 9700 1955
sales@fermaxaus.com.au

QLD

U11, 8 Fortitude Cres,
Burleigh Heads, QLD. 4220
p. 61 7 5520 2266
f. 61 7 5520 4591
qld@fermaxaus.com.au

VIC

U30, 640-680 Geelong Rd,
Brooklyn, VIC. 3012
p. 61 3 9314 2220
f. 61 3 9314 7772
vic@fermaxaus.com.au

WA

PO Box 587
Balcatta. 6914
m. 0438 700 101
wa@fermaxaus.com.au

fermaxaus
.com.au

